




Spirit & Success, Together



High Brightness



Maintain

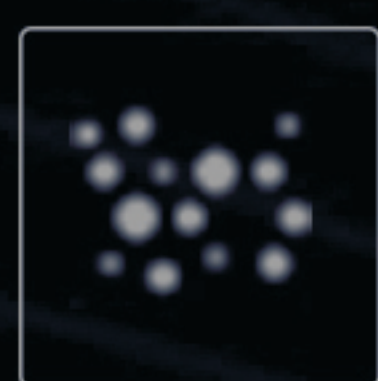

Dustproof



Magnetic



Low Consumption



FC-A Series

Outdoor Fixed Front And Back Service Design





enbondisplay



Enbon Led Display



Spirit & Success, Together

Lighter Weight , Easier Operation



20% lighter than normal products
Making it more convenient to operate and move

• Weight 28.5kg



Thinner Panels , Lower Cost

10 in 1 wooden package

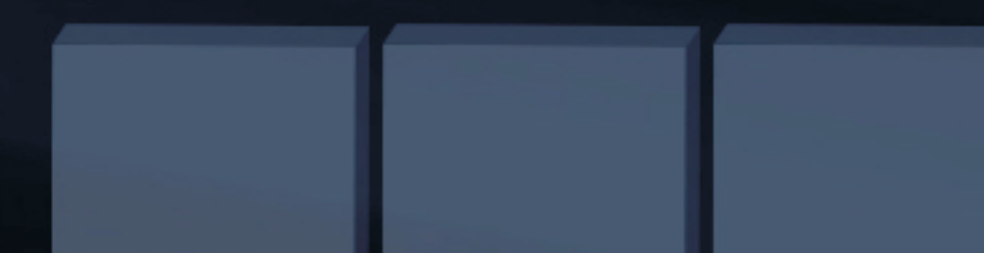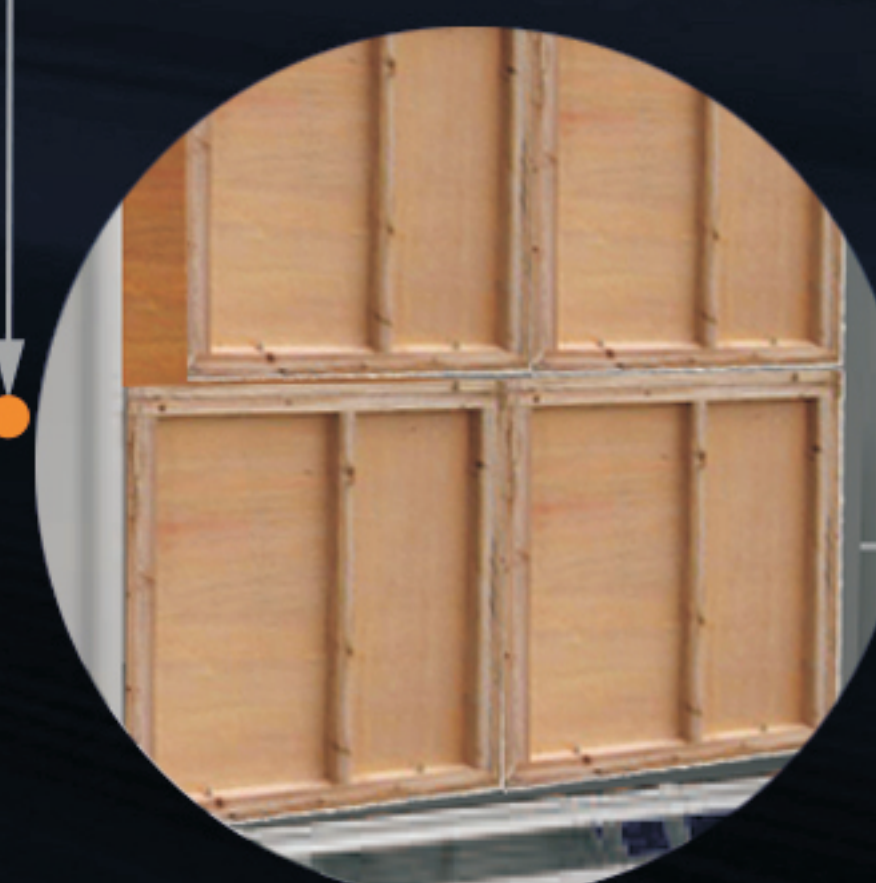


24 Cases Can be placed horizontally
in a regular 20-foot

Front And Rear Installation And Maintenance

Front and rear installation and maintenance, flexible installation and convenient maintenance




Rotate 90 degrees to the left to unlock.

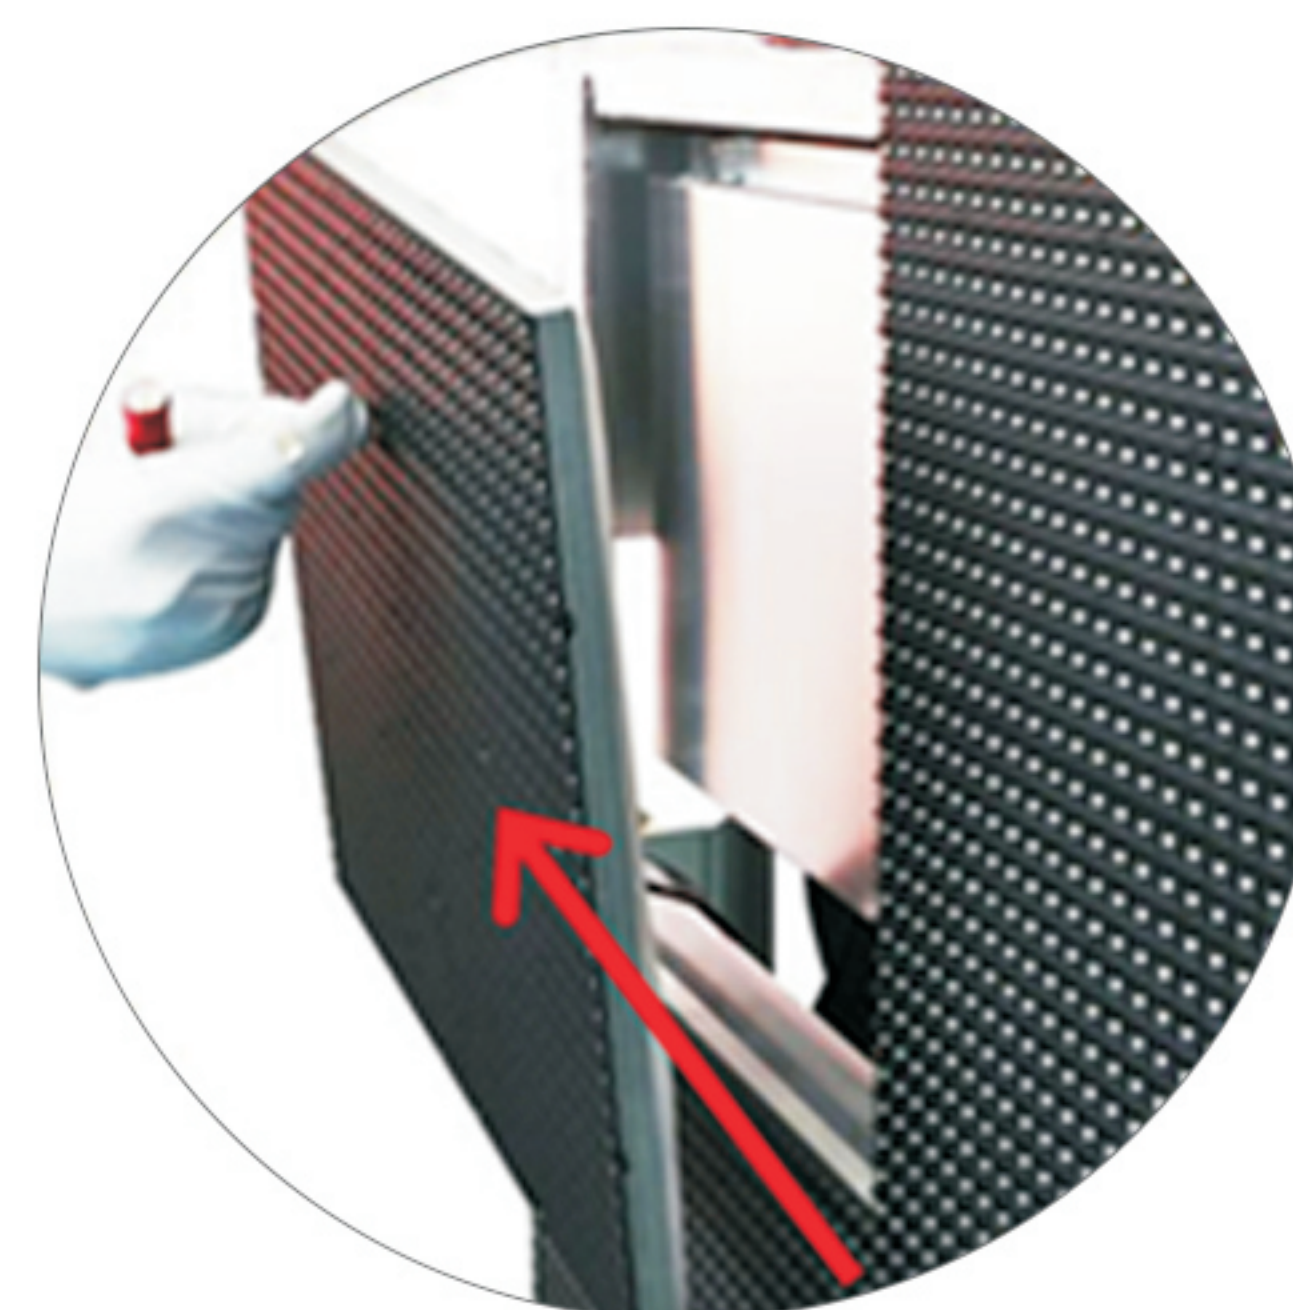


Remove the module with t-tool



Open the power box lock by hand

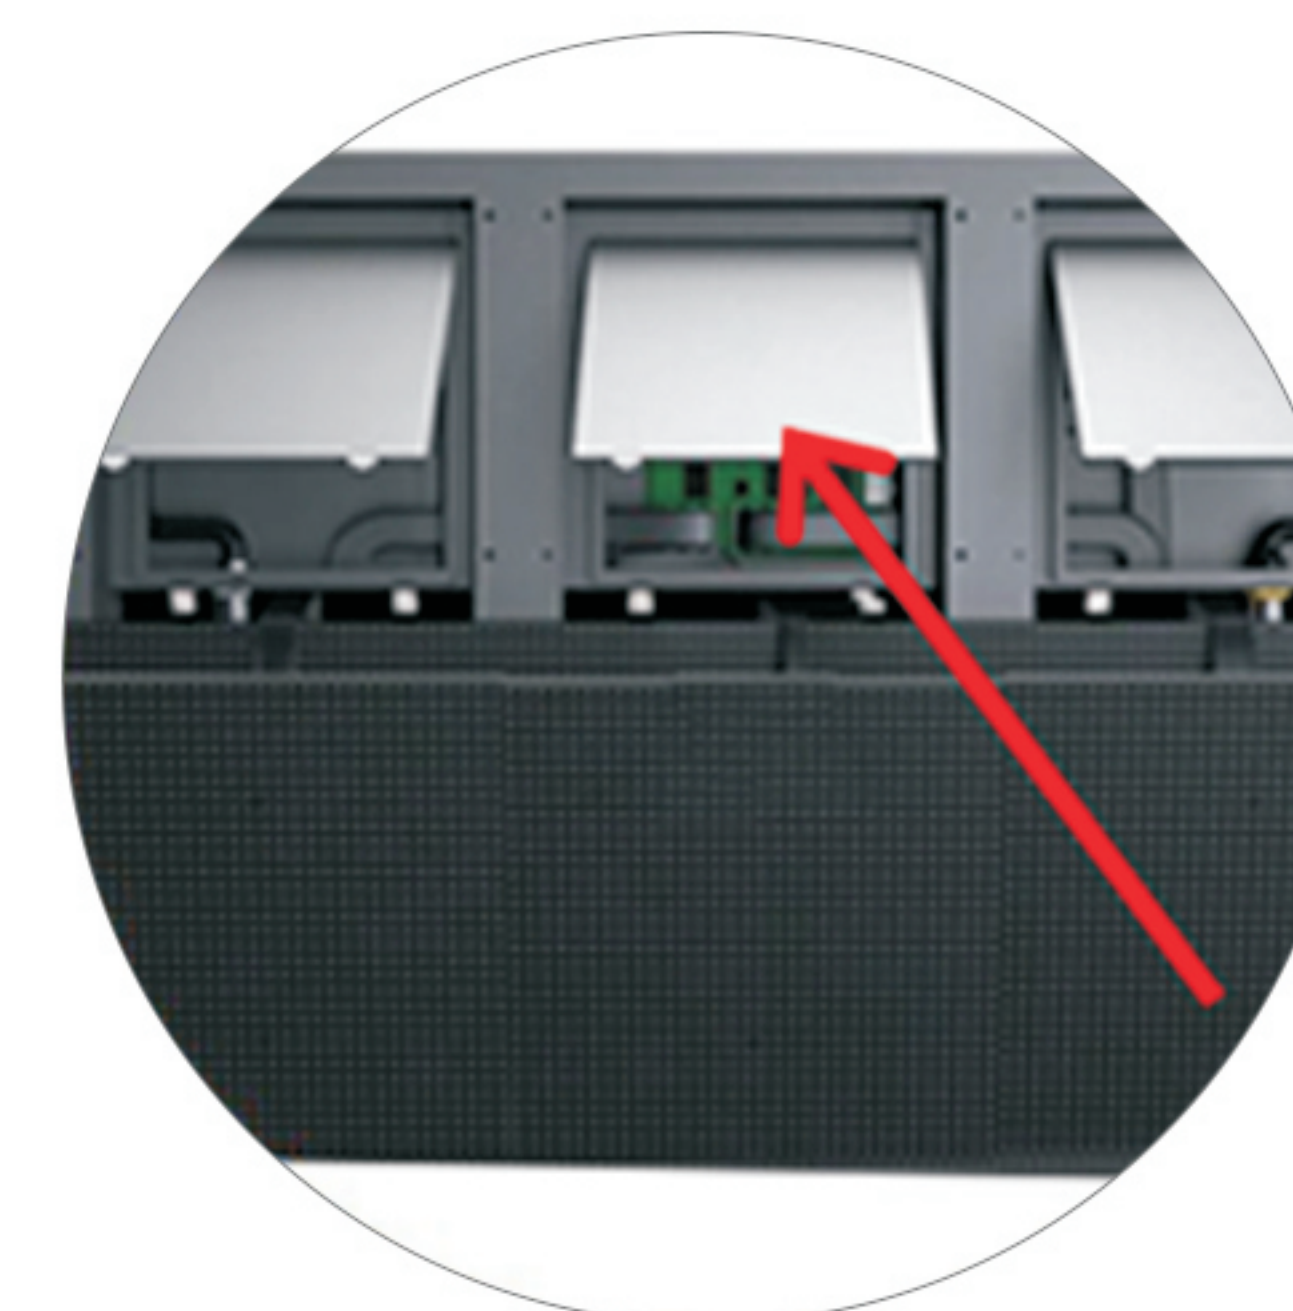

After opening, the internal accessories
of power box can be maintained

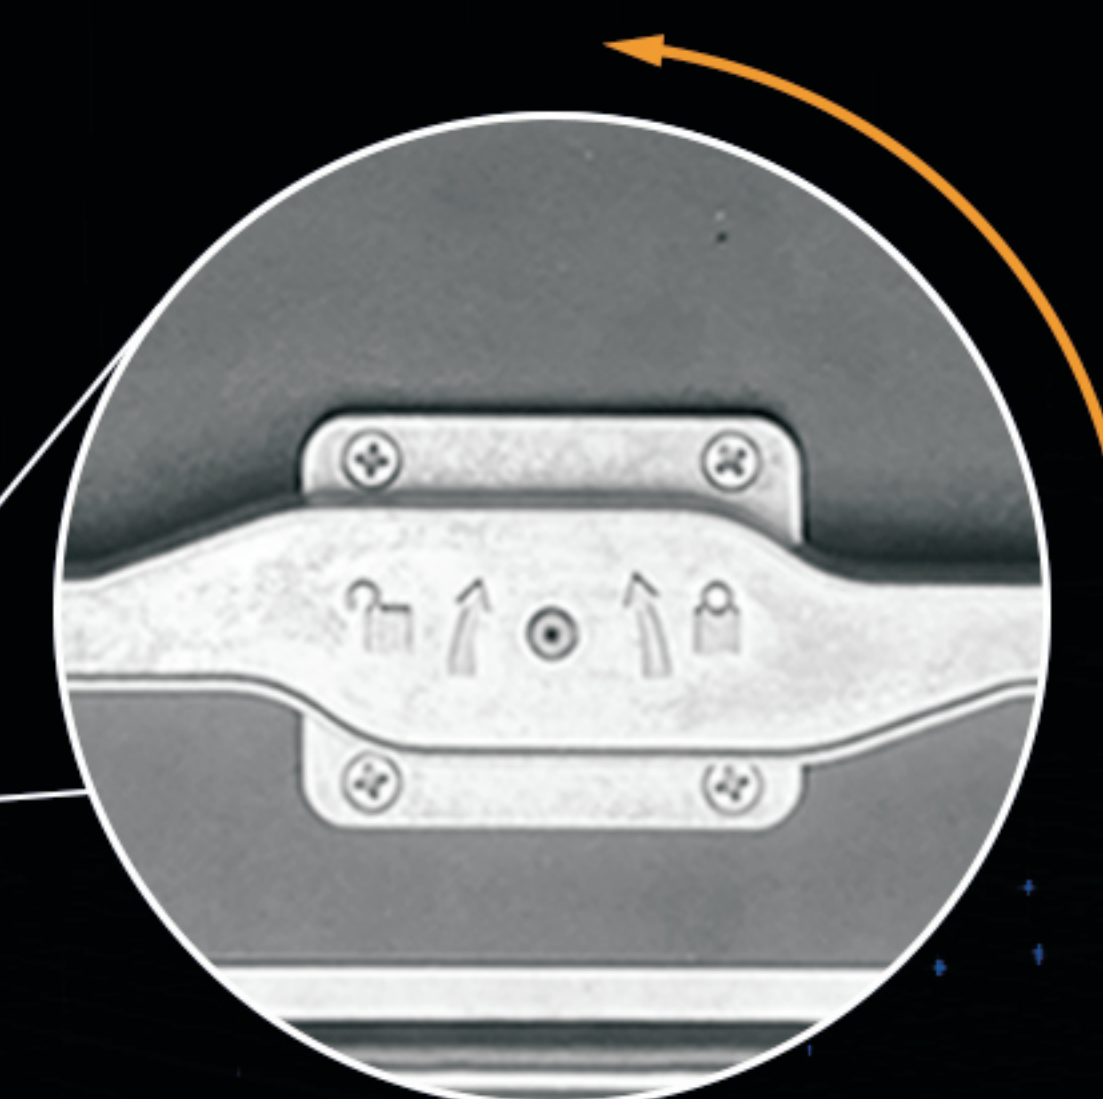

Safety lock

Press and turn to unlock the panel

Advanced Lock , Quick Installation

Advanced locking system safety
Mechanism enables one-man installation



enbondisplay



Enbon Led Display



Spirit & Success, Together

Product Specification

960*960mm

Pixel Pitch	3.7	5.2	6.5	7.8	9.5
LED lamp	SMD1921	SMD1921	SMD2727	SMD2727	SMD2727
Density	72972dots/m2	36980dots/m2	23661dots/m2	15625dots/m2	10000dots/m2
Brightness	5000-5500nits	5500-6000nits	5000-5500nits	5500-6000nits	6000-6500nits
IP rating	IP65	IP65	IP65	IP65	IP65
Cabinet Materiel	Die-casting Aluminum				
Scan	14scan	6scan	6scan	5scan	2scan
Module weight	1.65kg	1.65kg	1.65kg	1.65kg	1.65kg
Cabinet Weight	28.5kg	28.5kg	28.5kg	28.5kg	28.5kg
Module size	320*320*14mm	320*320*14mm	320*320*14mm	320*320*14mm	320*320*14mm
Cabinet size	960*960*100mm	960*960*100mm	960*960*100mm	960*960*100mm	960*960*100mm
Module pixel	86*86dots	61*61dots	49*49dots	40*40dots	32*32dots
Cabinet pixel	259*259dots	184*184dots	147*147dots	120*120dots	96*96dots
Max Power	600w/sqm	750w/sqm	850w/sqm	750w/sqm	900w/sqm
Average Power	200w/sqm	250w/sqm	285w/sqm	250w/sqm	300w/sqm
Viewing Angle	H140 (+70/-70) deg V140 (+70/-70) deg				
Control way	Synchronous/Asynchronous				
Gray scale	16bit				
Operating system	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI				
Work humidity	10% ~ 90%				
Work temperature	- 20 ~ + 65℃				

Shenzhen Enbon Optoelectronic CO.,LTD.

3/ F, Building 1, High-tech Park,Fuyuan Road No.156, Fuhai Street,
Fuyong Town,Baoan District, Shenzhen, China



sales@enbon.com

www.enbon.com



(+86) 130-8885-4440