




G Model

Design For Indoor Projects Solution

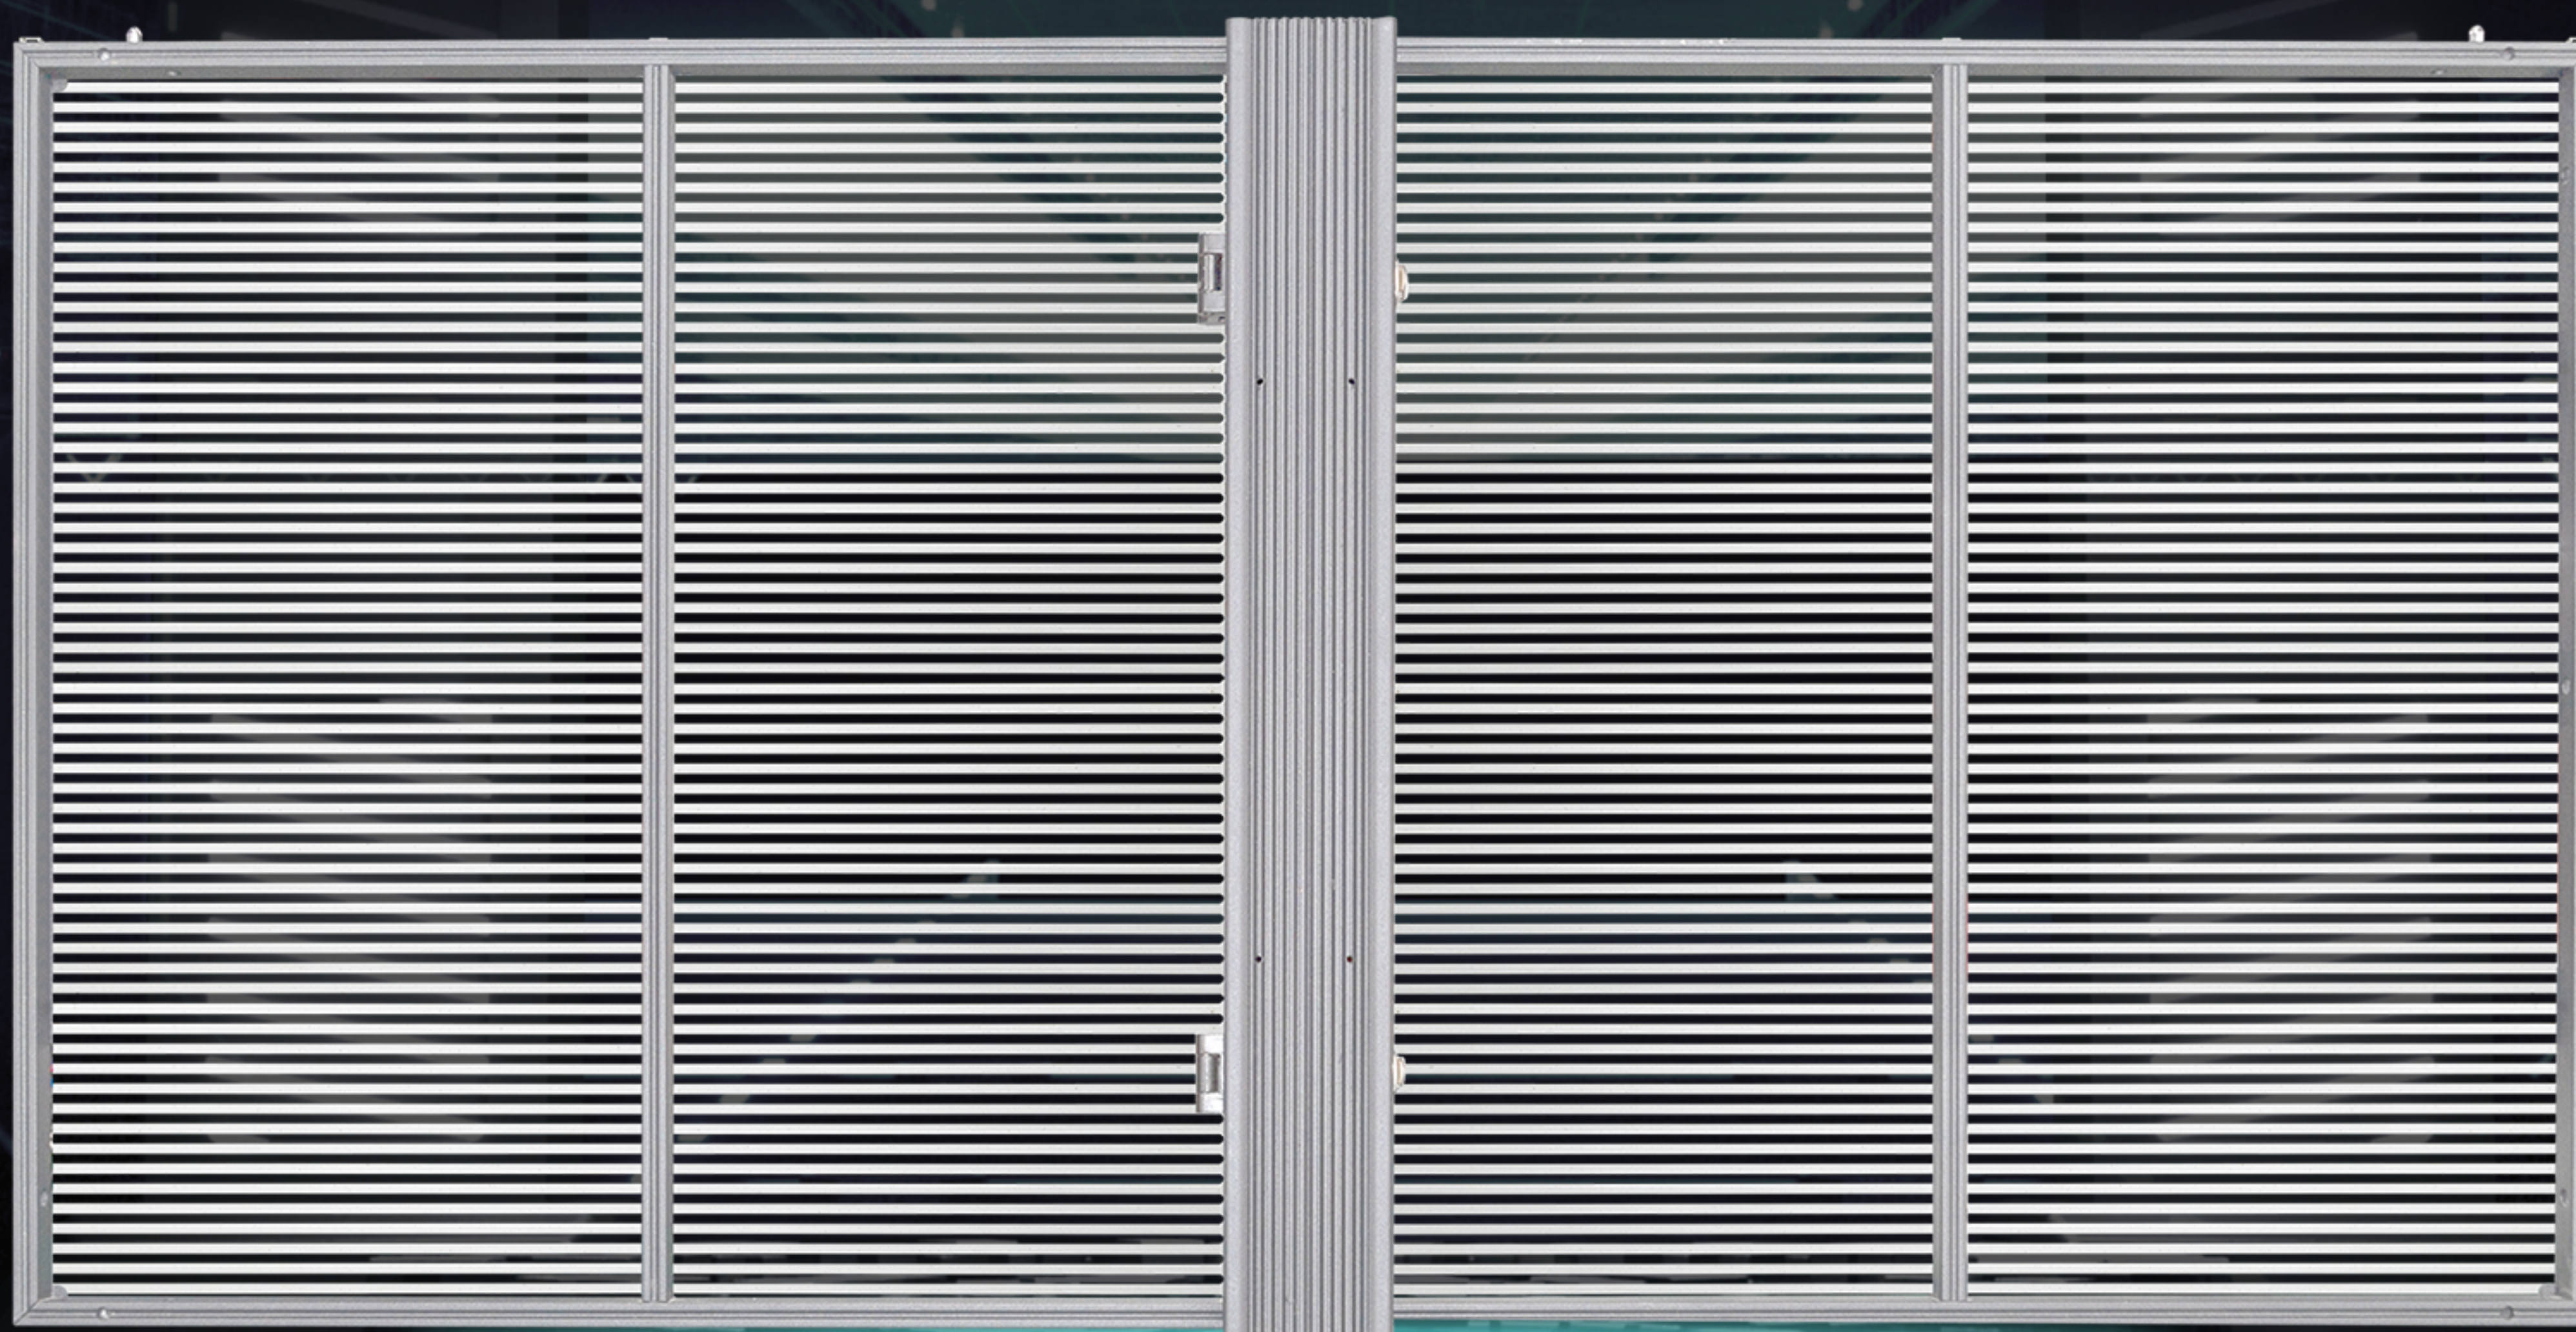

ENBON GROUP
Spirit & Success, **Together**



+86-755-2357 0137



www.enbon.com



enbon led display



enbondisplay



enbon led display




enbon led display




Lighter **W**eight Easier **O**peration

20% lighter than normal products
Making it more convenient to operate and move

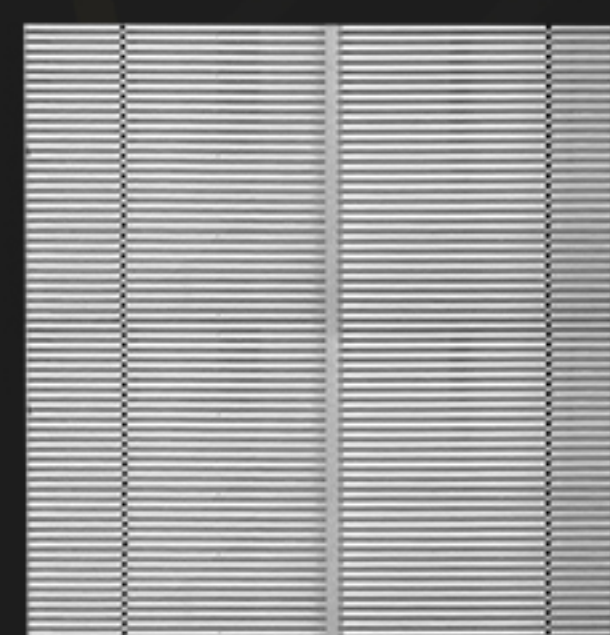


L*H: 500*250(mm)

Module

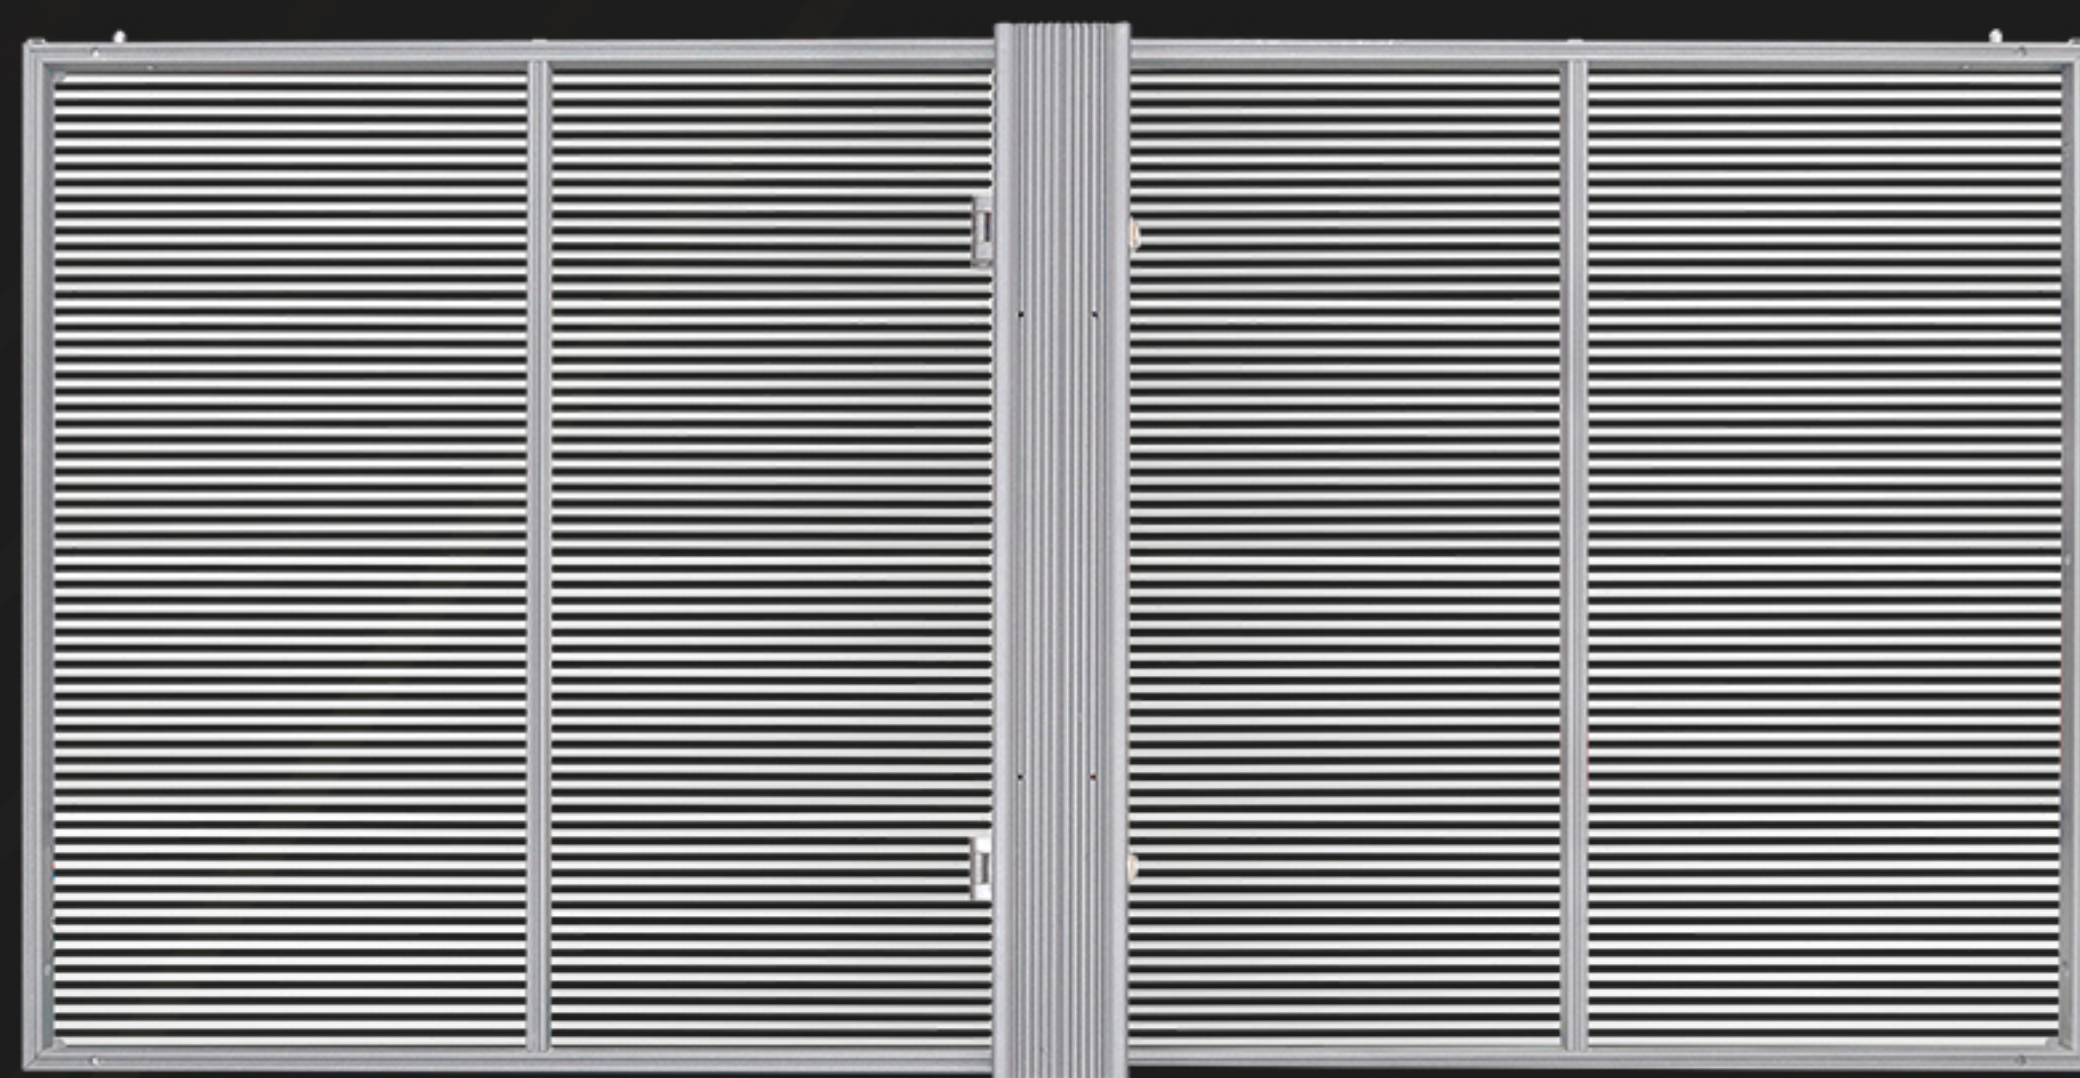

L*H:1000*500(mm)

Cabinet

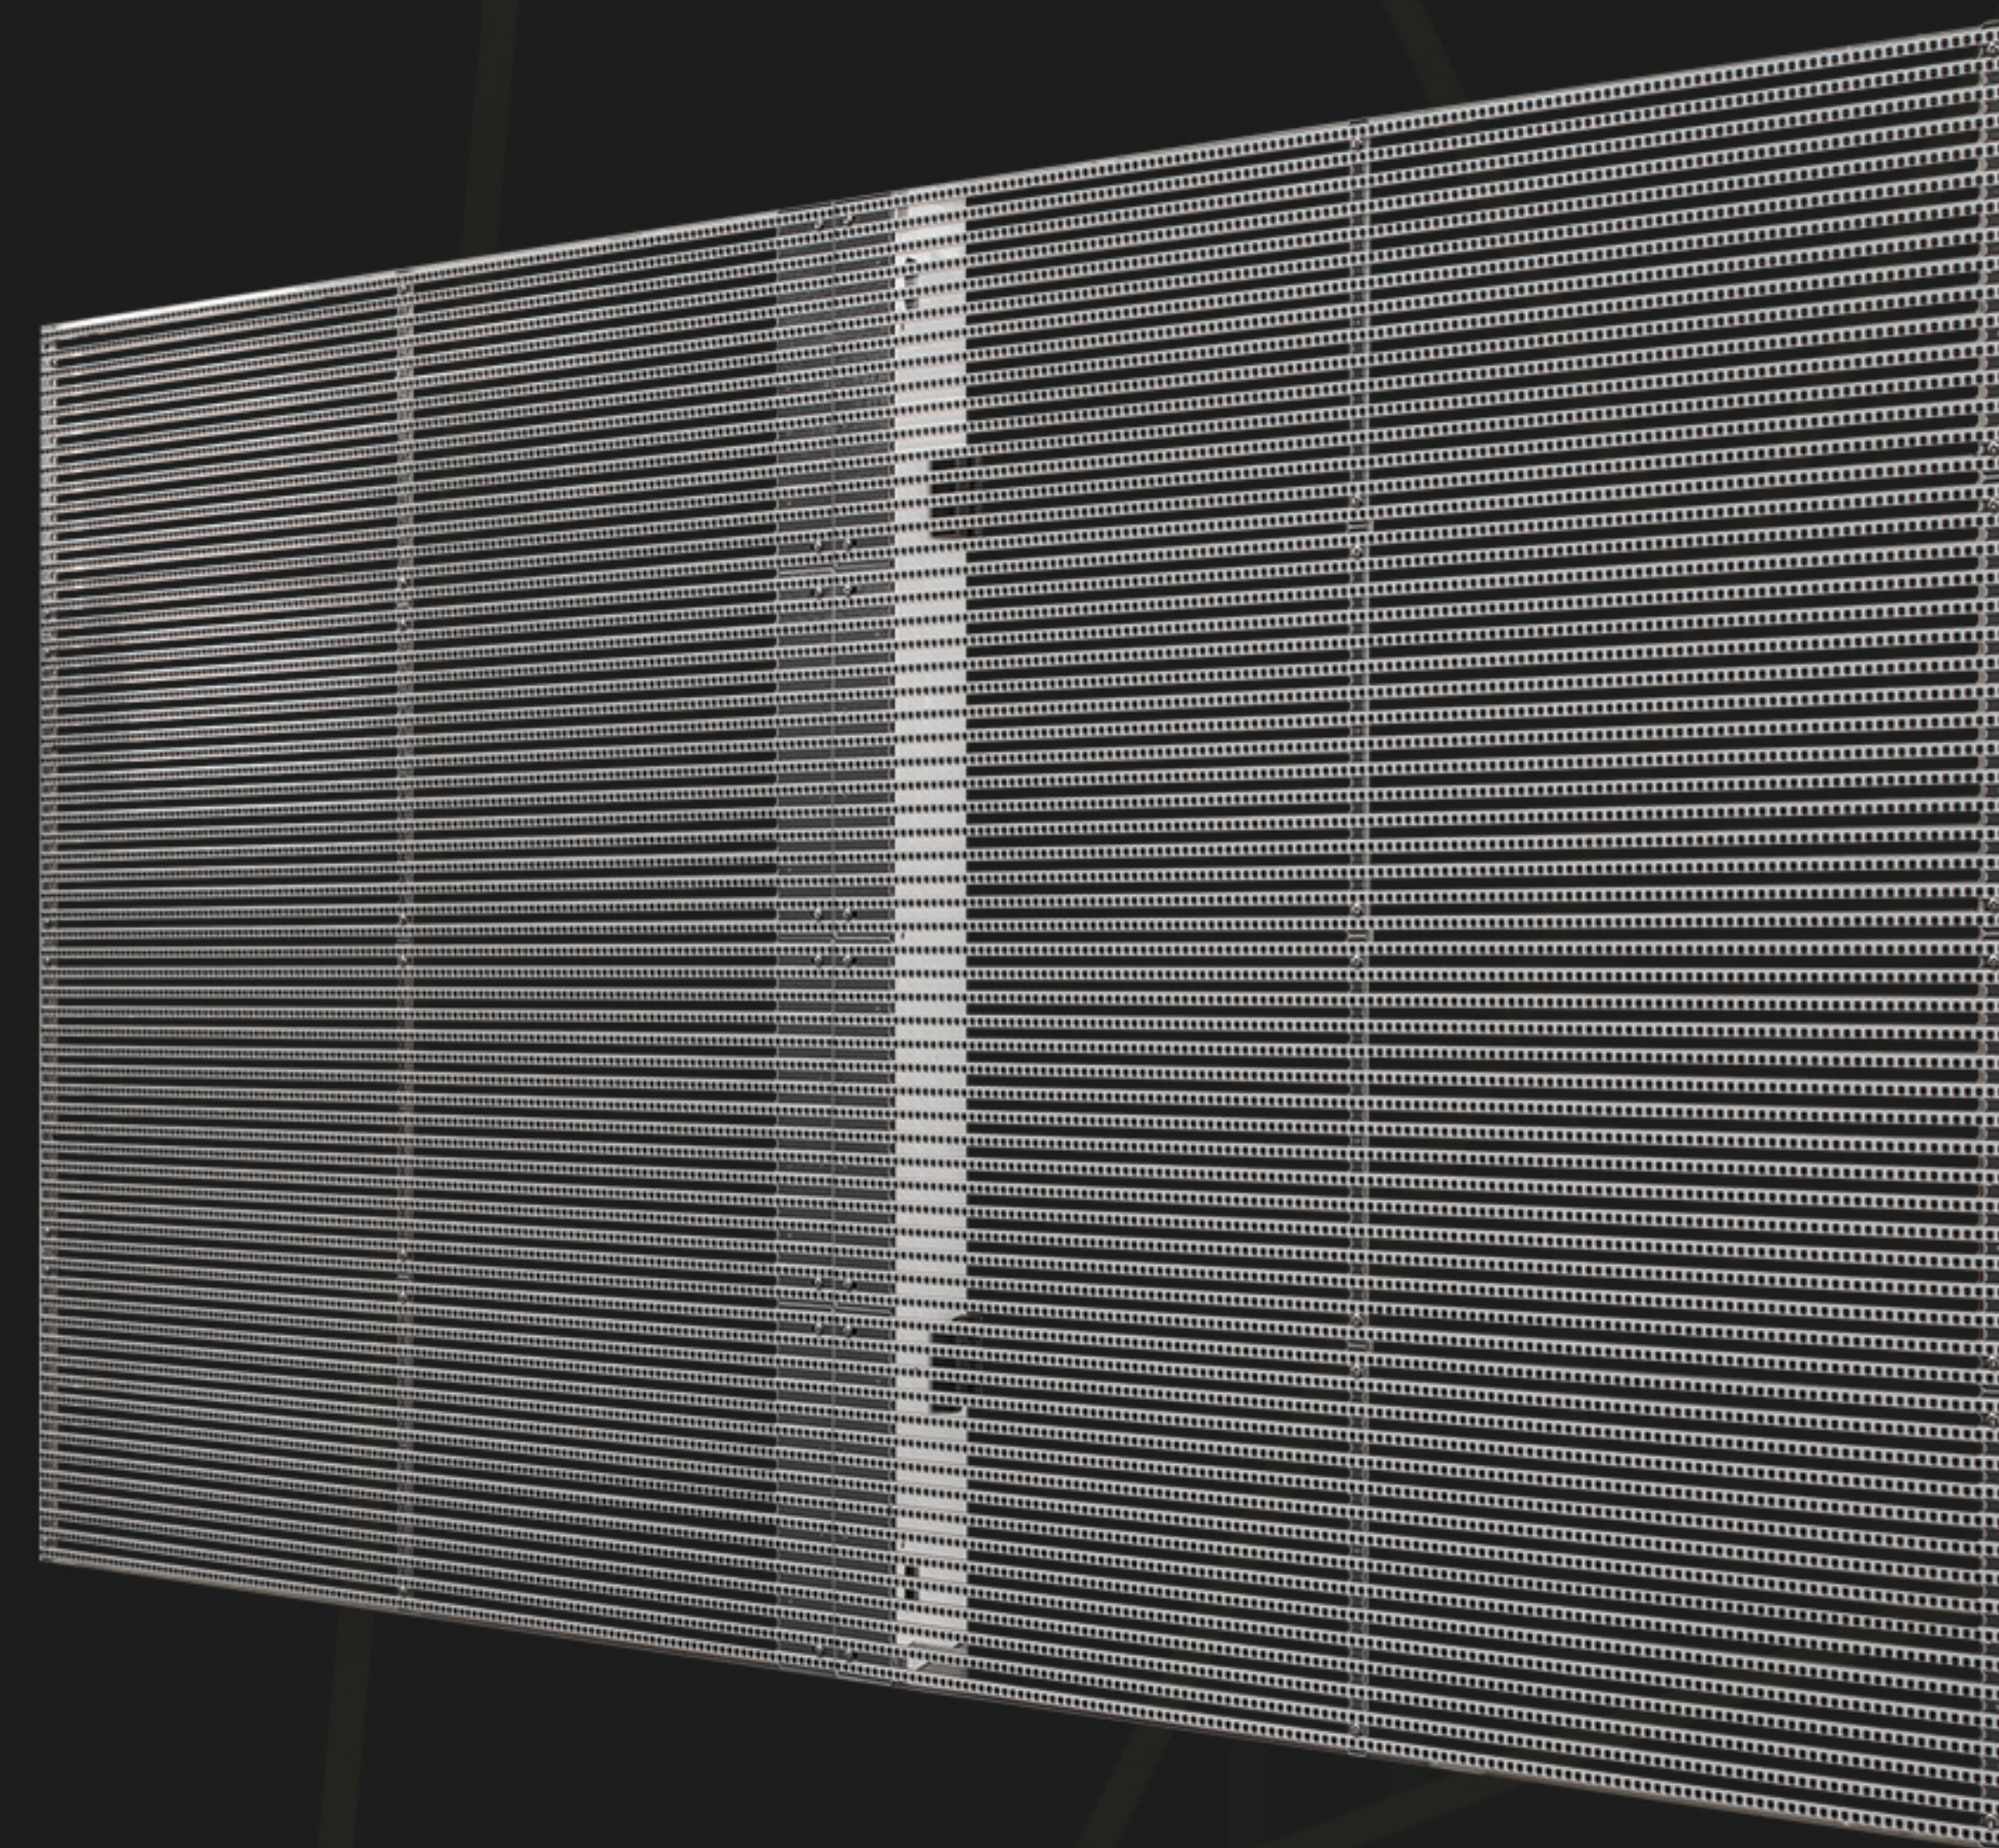

Weight 5.5kg

ENBON GROUP
Spirit & Success, **Together**



+86-755-2357 0137



www.enbon.com



enbon led display



enbondisplay



enbon led display



enbon led display

EnBon

High Refresh Rate
High Grayscale



Low Refresh Rate



High Refresh Rate



Low Grayscale



High Grayscale

ENBON GROUP
Spirit & Success, Together



+86-755-2357 0137



www.enbon.com



enbon led display



enbondisplay



enbon led display



enbon led display



Stowing **A**nd **H**anging

Optional vertical installation and hanging beam installation



Hanging Beam Installation



Vertical Installation





Product Specification

Advanced locking system safety, Mechanism enables one-man installation

Pixel Pitch	2.6-5.2	3.91-7.82	5.21-10.42	10.4-10.4
LED Lamp	SMD1415	SMD1921	SMD1921	SMD1921
Density (dots/m2)	73728	32768	18432	9216
Brightness	≥1000-5000 nits	≥1000-5000 nits	≥1000-5000 nits	≥1000-5000 nits
IP Rating	IP45	IP45	IP45	IP45
Cabinet Materiel	Aluminum			
Scan	16 scan	8 scan	4 scan	2 scan
Module Weight	0.25 kg	0.25 kg	0.25 kg	0.25 kg
Cabinet Weight	5.5 kg	5.5 kg	5.5 kg	5.5 kg
Module Size (mm)	500*125	500*125	500*125	500*125
Cabinet Size (mm)	1000*500*75	1000*500*75	1000*500*75	1000*500*75
Module Pixel	192*24 dots	128*16 dots	96*12 dots	48*12 dots
Cabinet Pixel	384*96 dots	256*64 dots	192*48 dots	96*48 dots
Max Power	680 w/sqm	680 w/sqm	680 w/sqm	680 w/sqm
Average Power	230 w/sqm	230 w/sqm	230 w/sqm	230 w/sqm
Viewing Angle	H140 (+70/-70) deg V140 (+70/-70) deg			
Control Way	Synchronous / Asynchronous			
Gray Scale	16 bit			
Operating System	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI			
Work Humidity	10% ~ 90%			
Work Temperature	-20 ~ + 65℃			

Shenzhen Enbon Optoelectronic CO.,LTD

3/ F, Building 1, High-tech Park,Fuyuan Road No.156, Fuhai Street,
Fuyong Town,Baoan District, Shenzhen, China



+86-755-2357 0137



www.enbon.com



enbon led display



enbondisplay



enbon led display



enbon led display