




FS-Plus Model

Small Pitch Cabinet Full Front Service

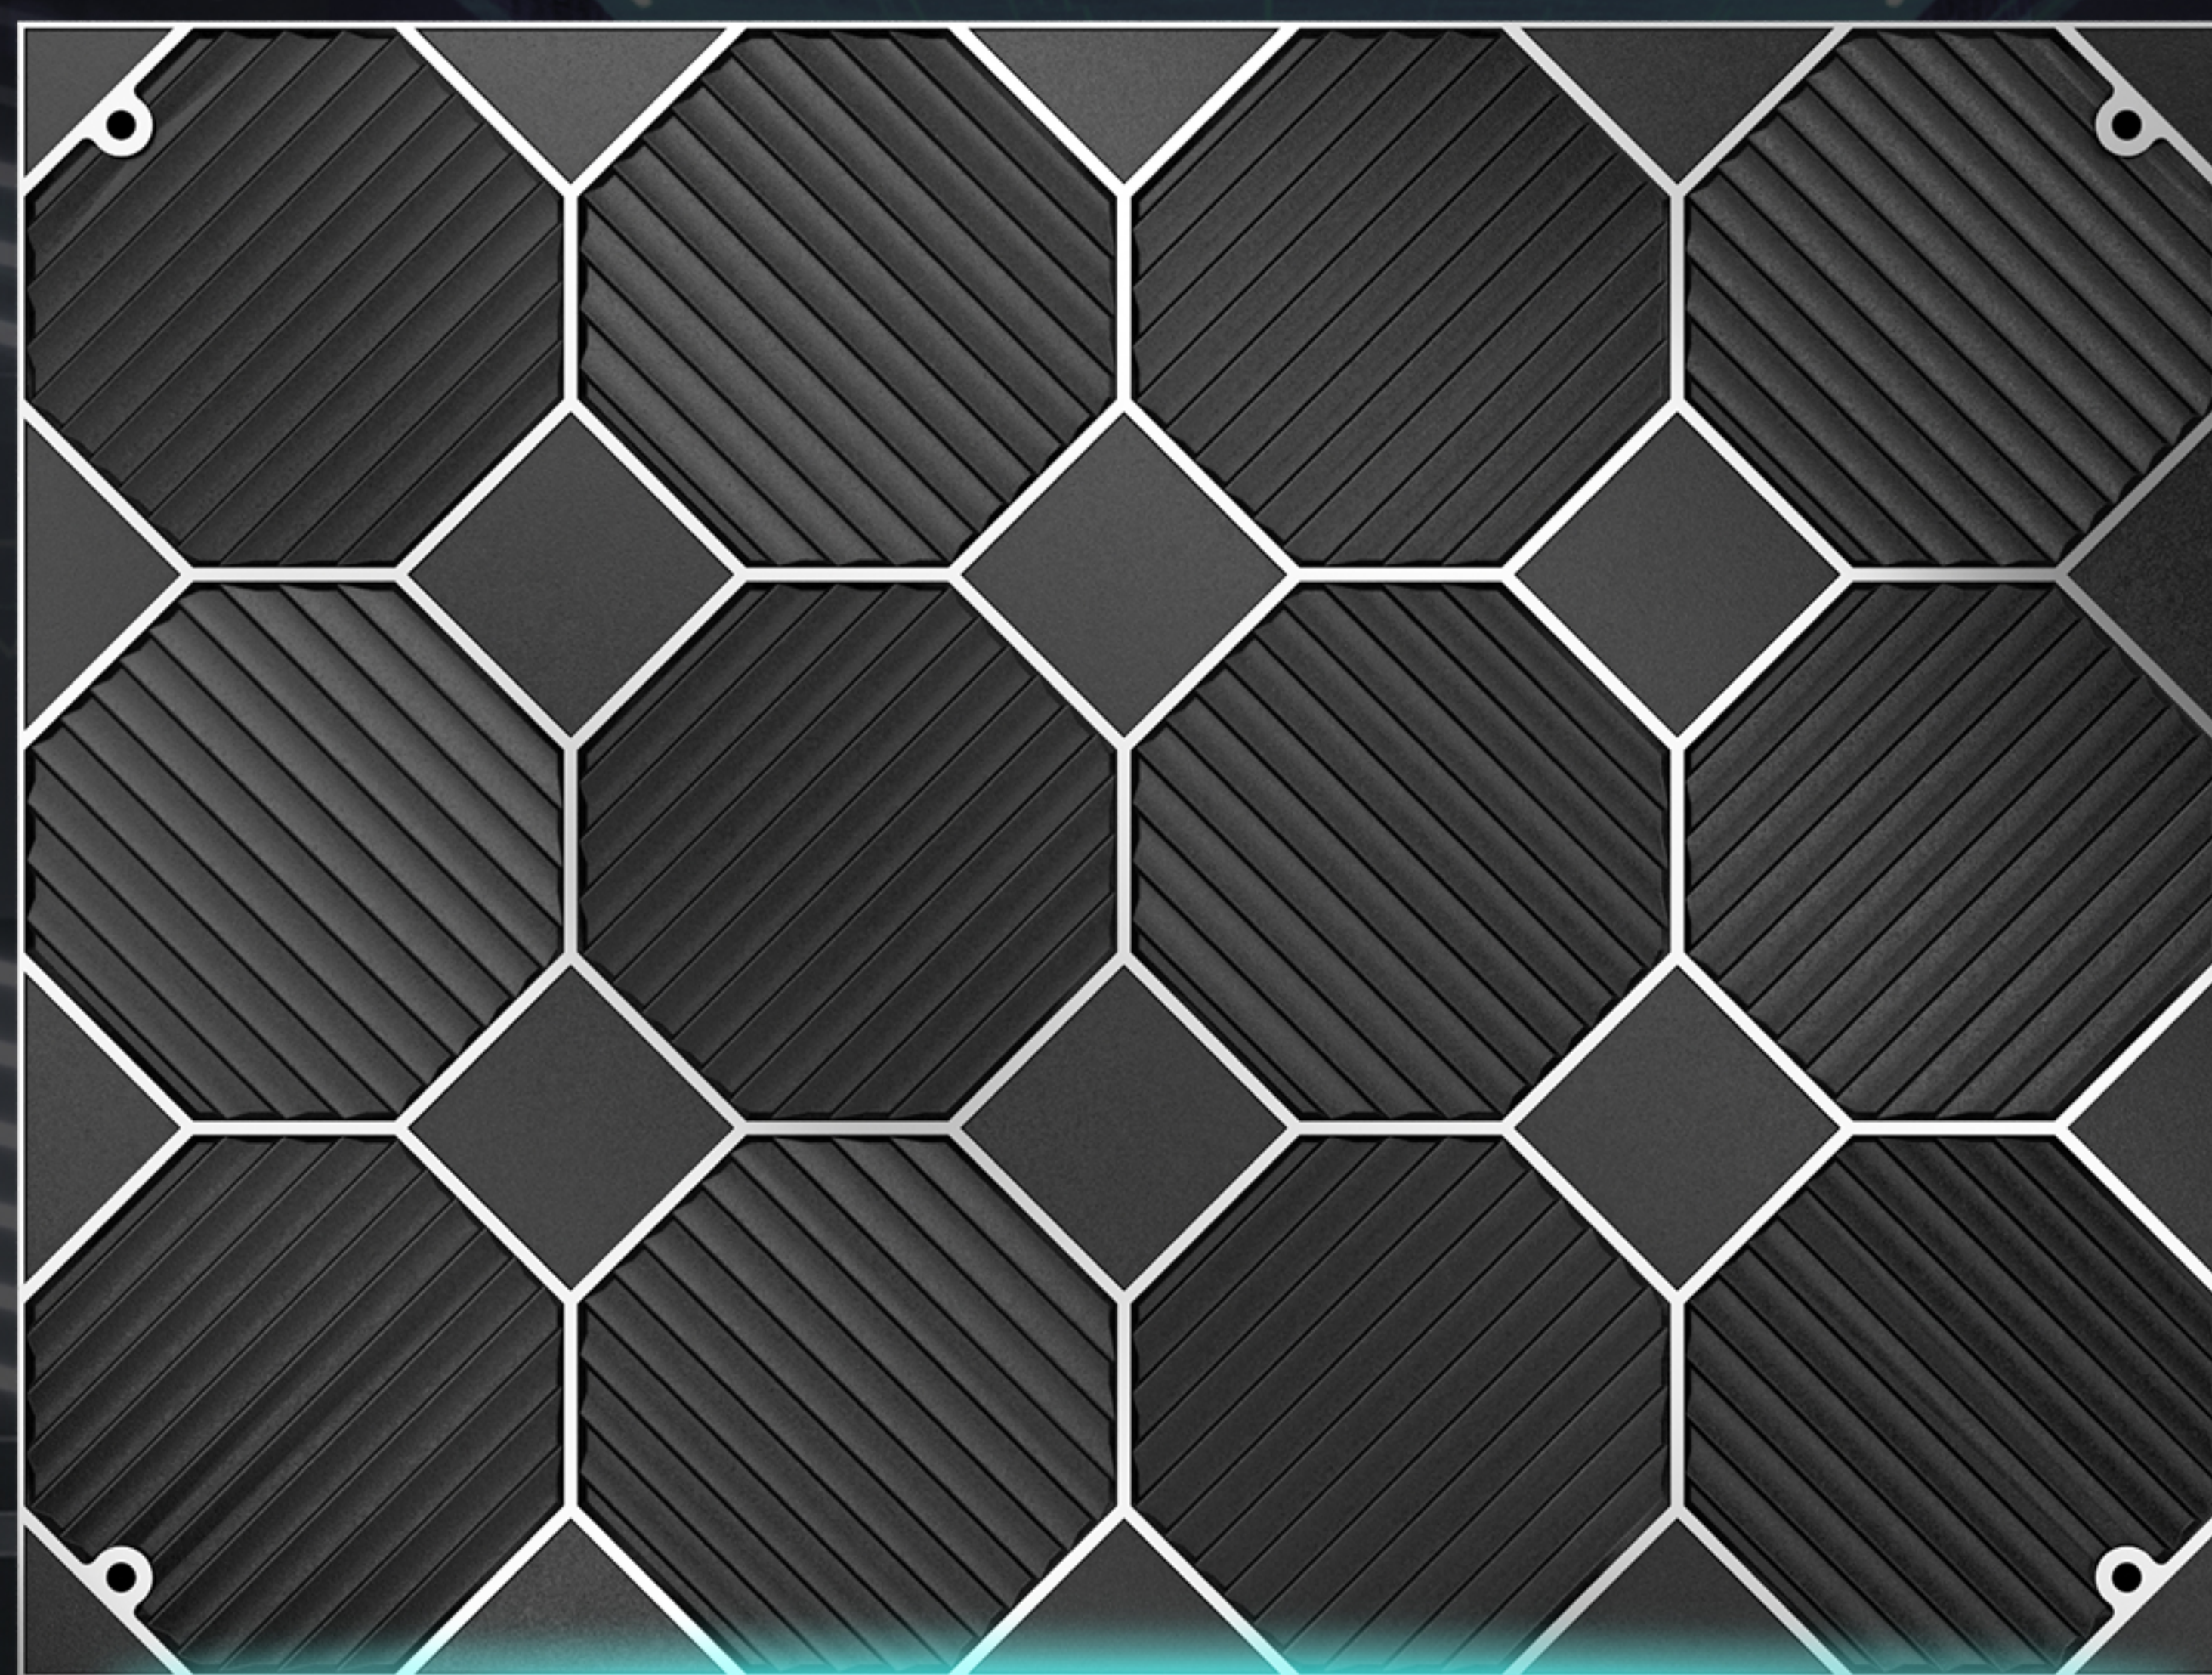

ENBON GROUP
Spirit & Success, **Together**



+86-755-2357 0137



www.enbon.com



enbon led display



enbondisplay



enbon led display




enbon led display




Lighter **W**eight **E**asier **O**peration

20% lighter than normal products
Making it more convenient to operate and move

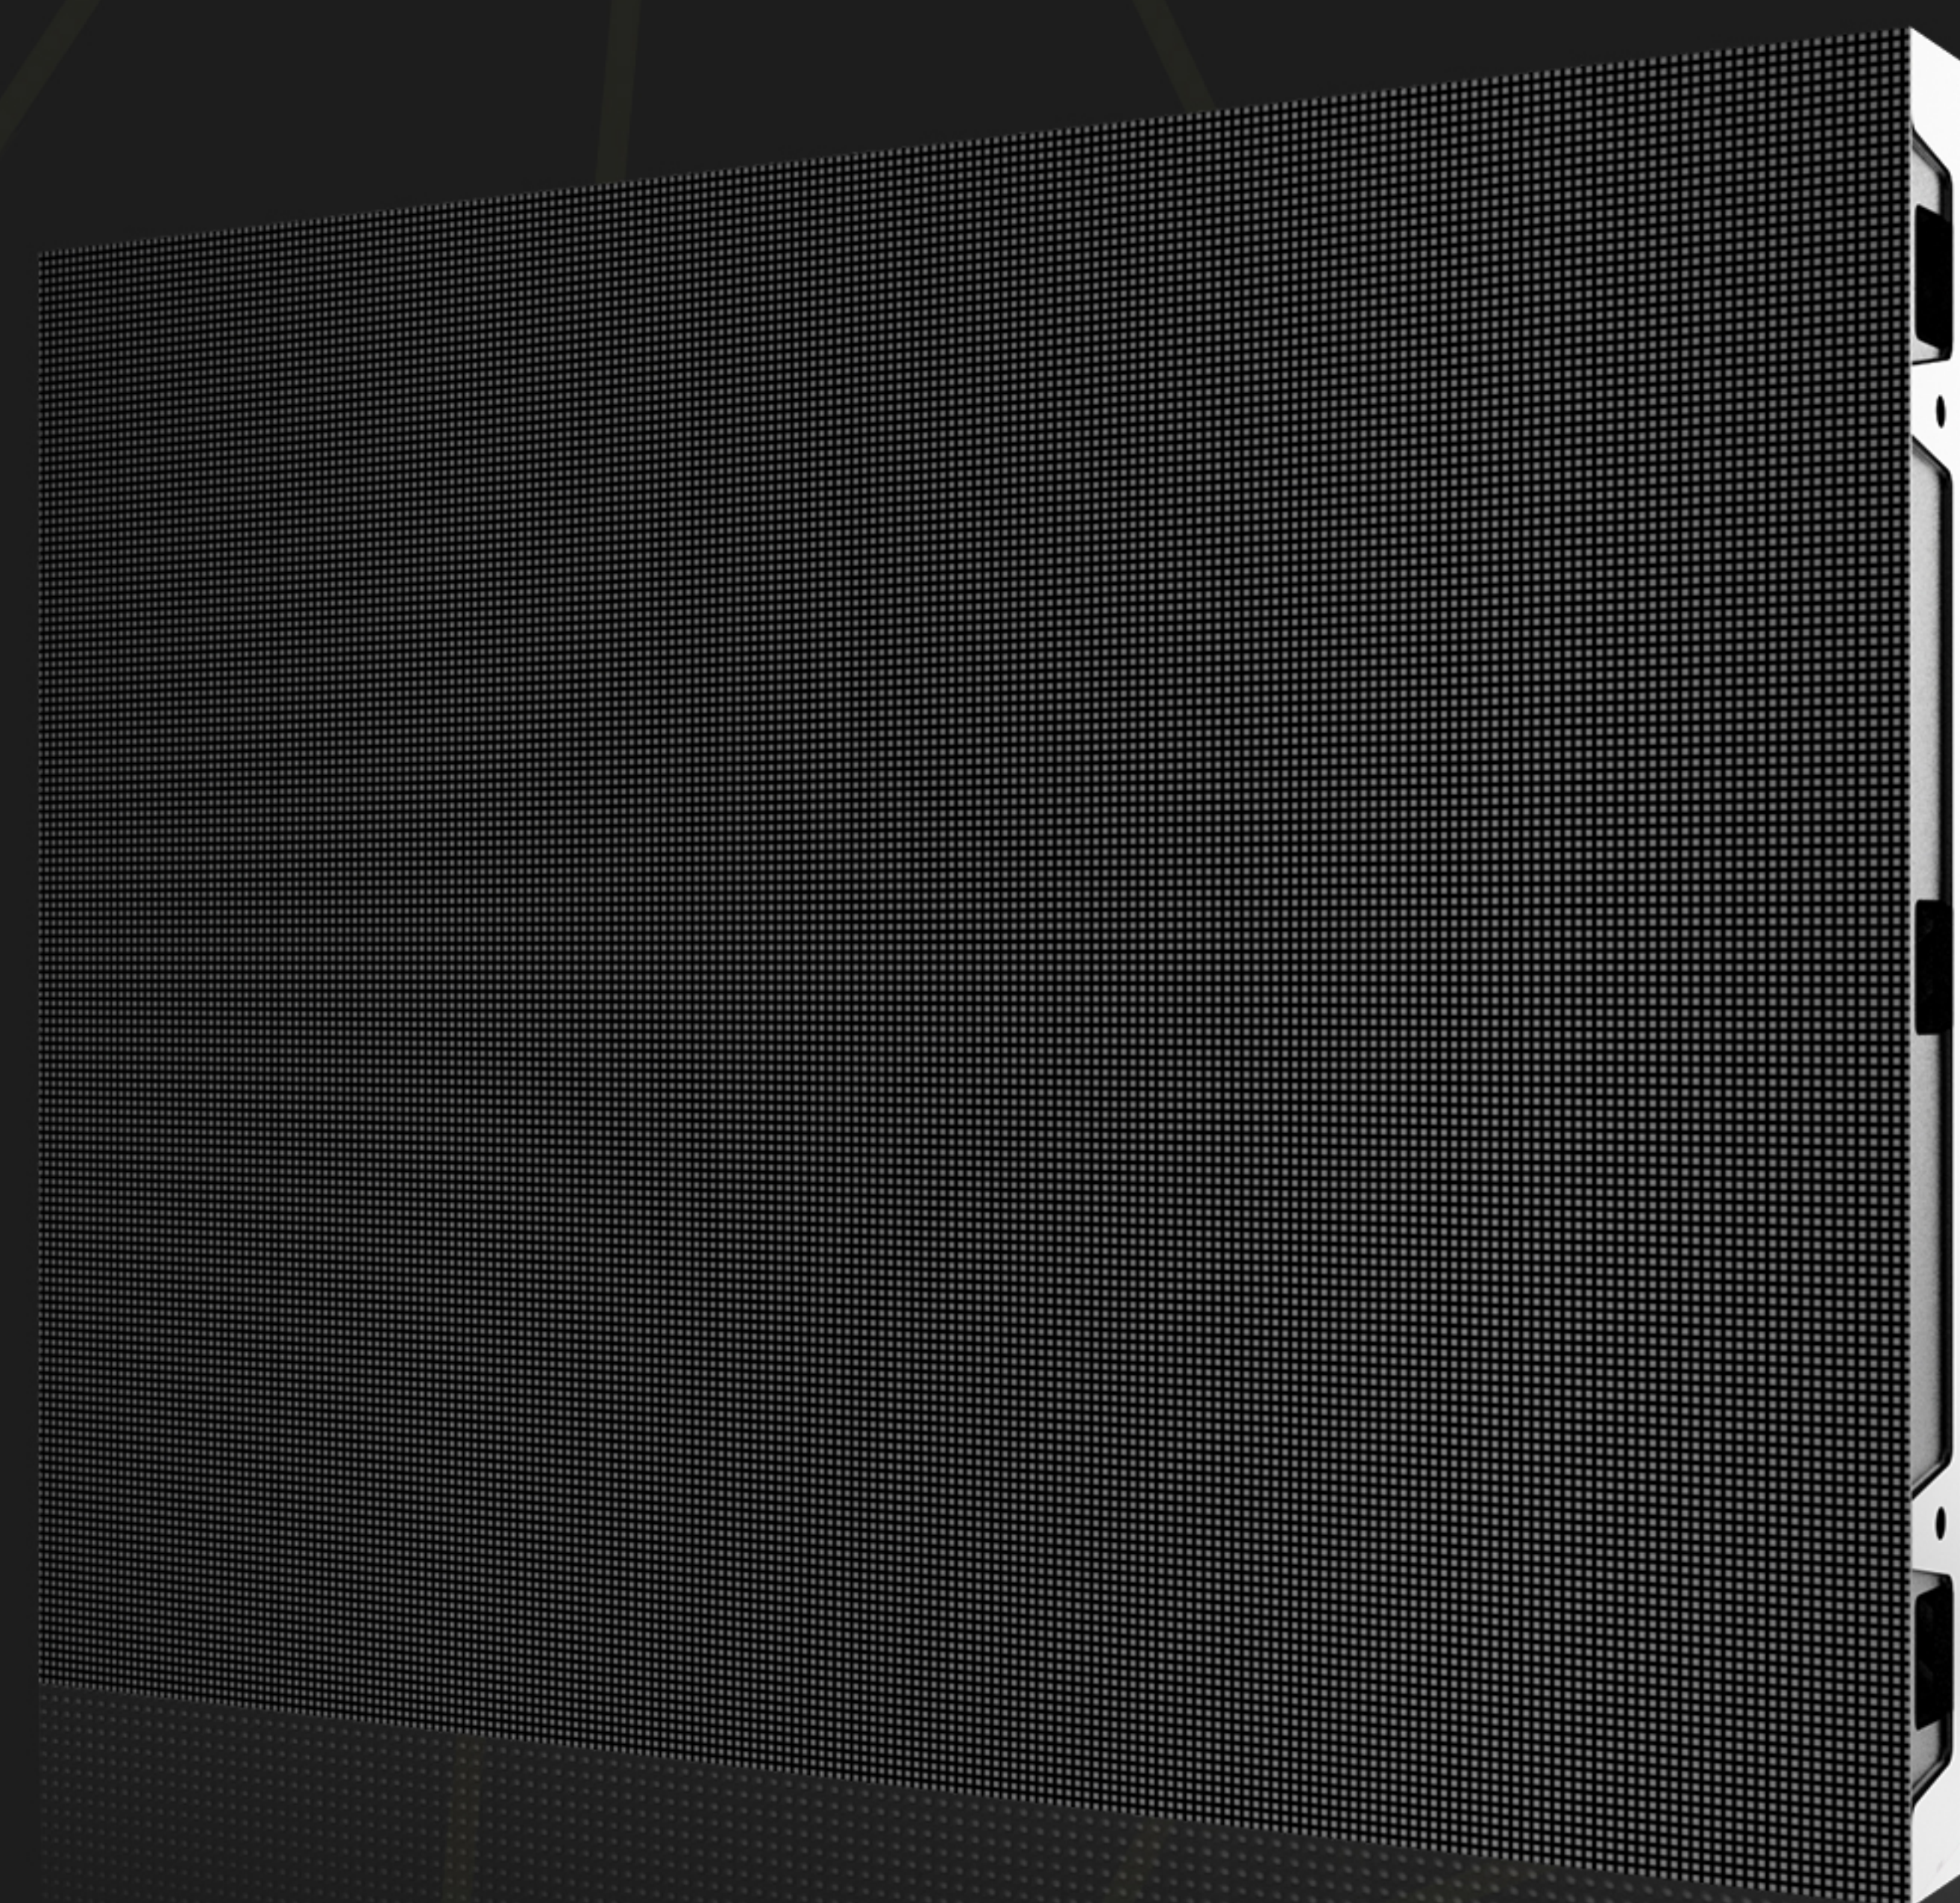

L*H: 320*160(mm)

Module

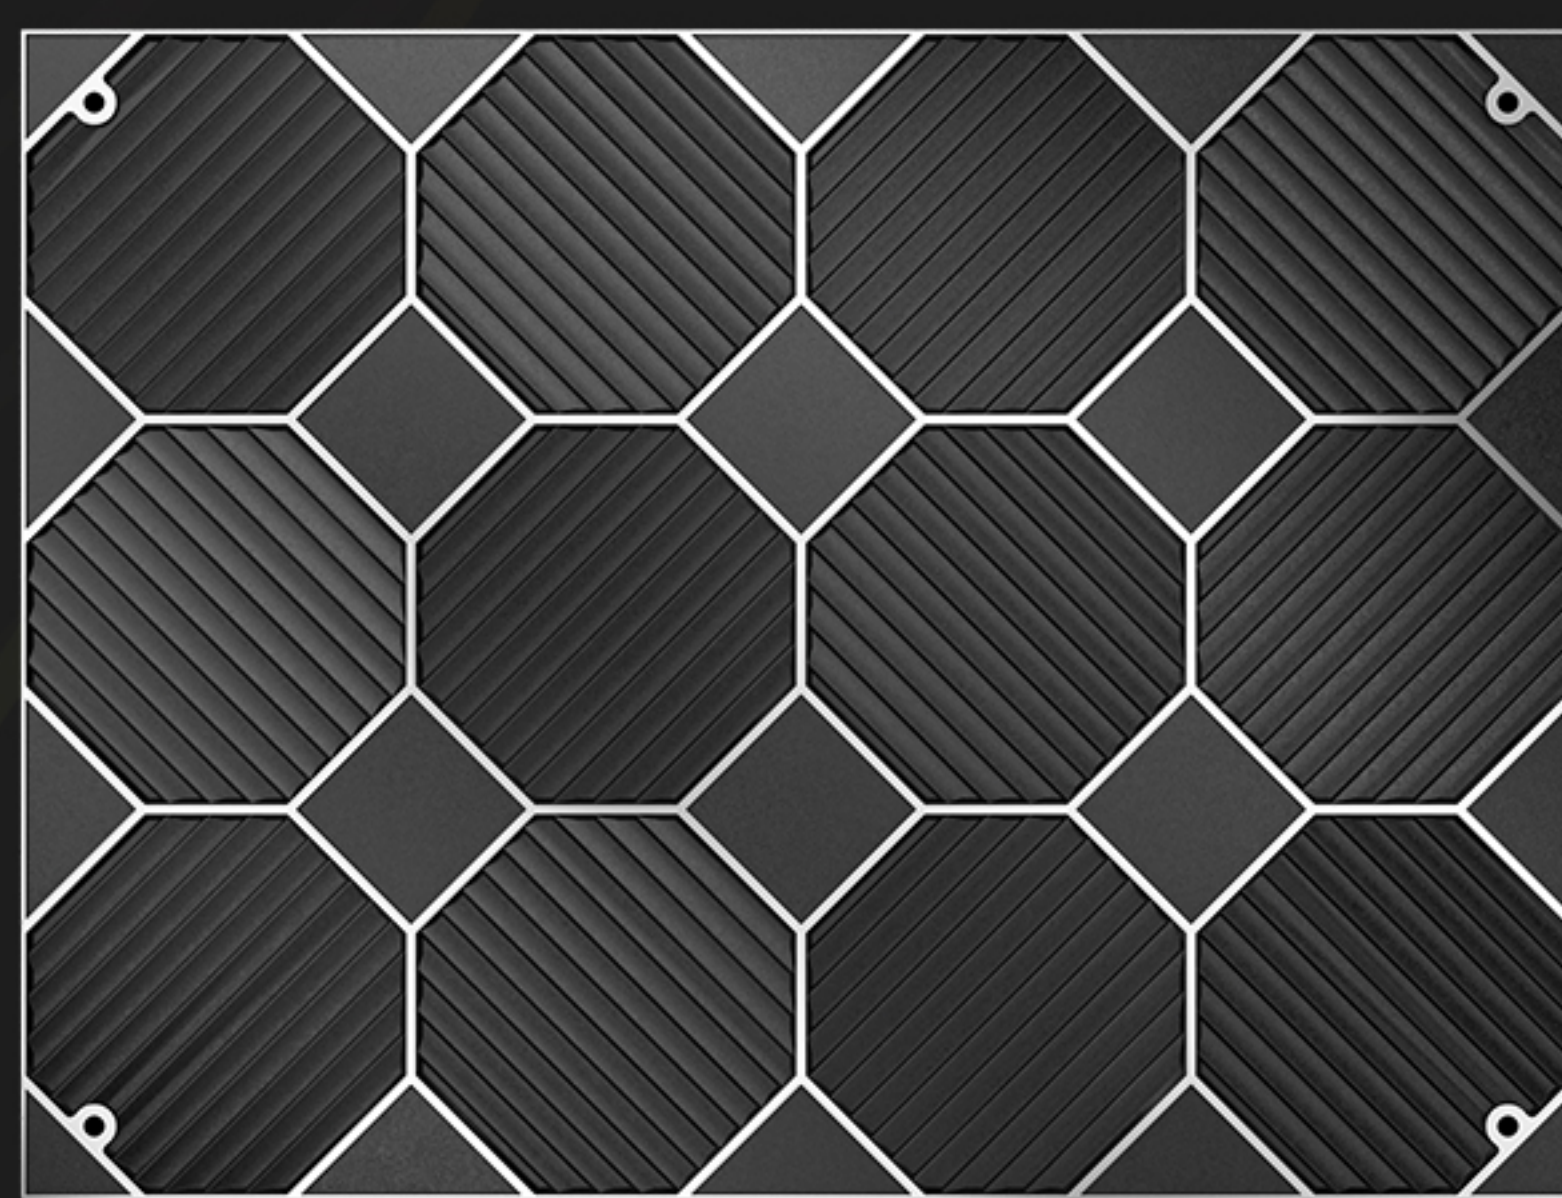

L*H: 640*480(mm)

Cabinet

Weight 5.5kg

ENBON GROUP
Spirit & Success, **Together**



+86-755-2357 0137



www.enbon.com



enbon led display



enbondisplay



enbon led display



enbon led display



Thinner Panels Lower Cost

6 in 1 flight case saves more space
and transportation cost



24 panels can be placed horizontally
in a regular 20-foot or 40-foot truck



ENBON GROUP
Spirit & Success, **Together**



+86-755-2357 0137



www.enbon.com



enbon led display



enbondisplay



enbon led display



enbon led display



High Refresh Rate
High Grayscale



Low Refresh Rate



High Refresh Rate



Low Grayscale




High Grayscale







Product Details

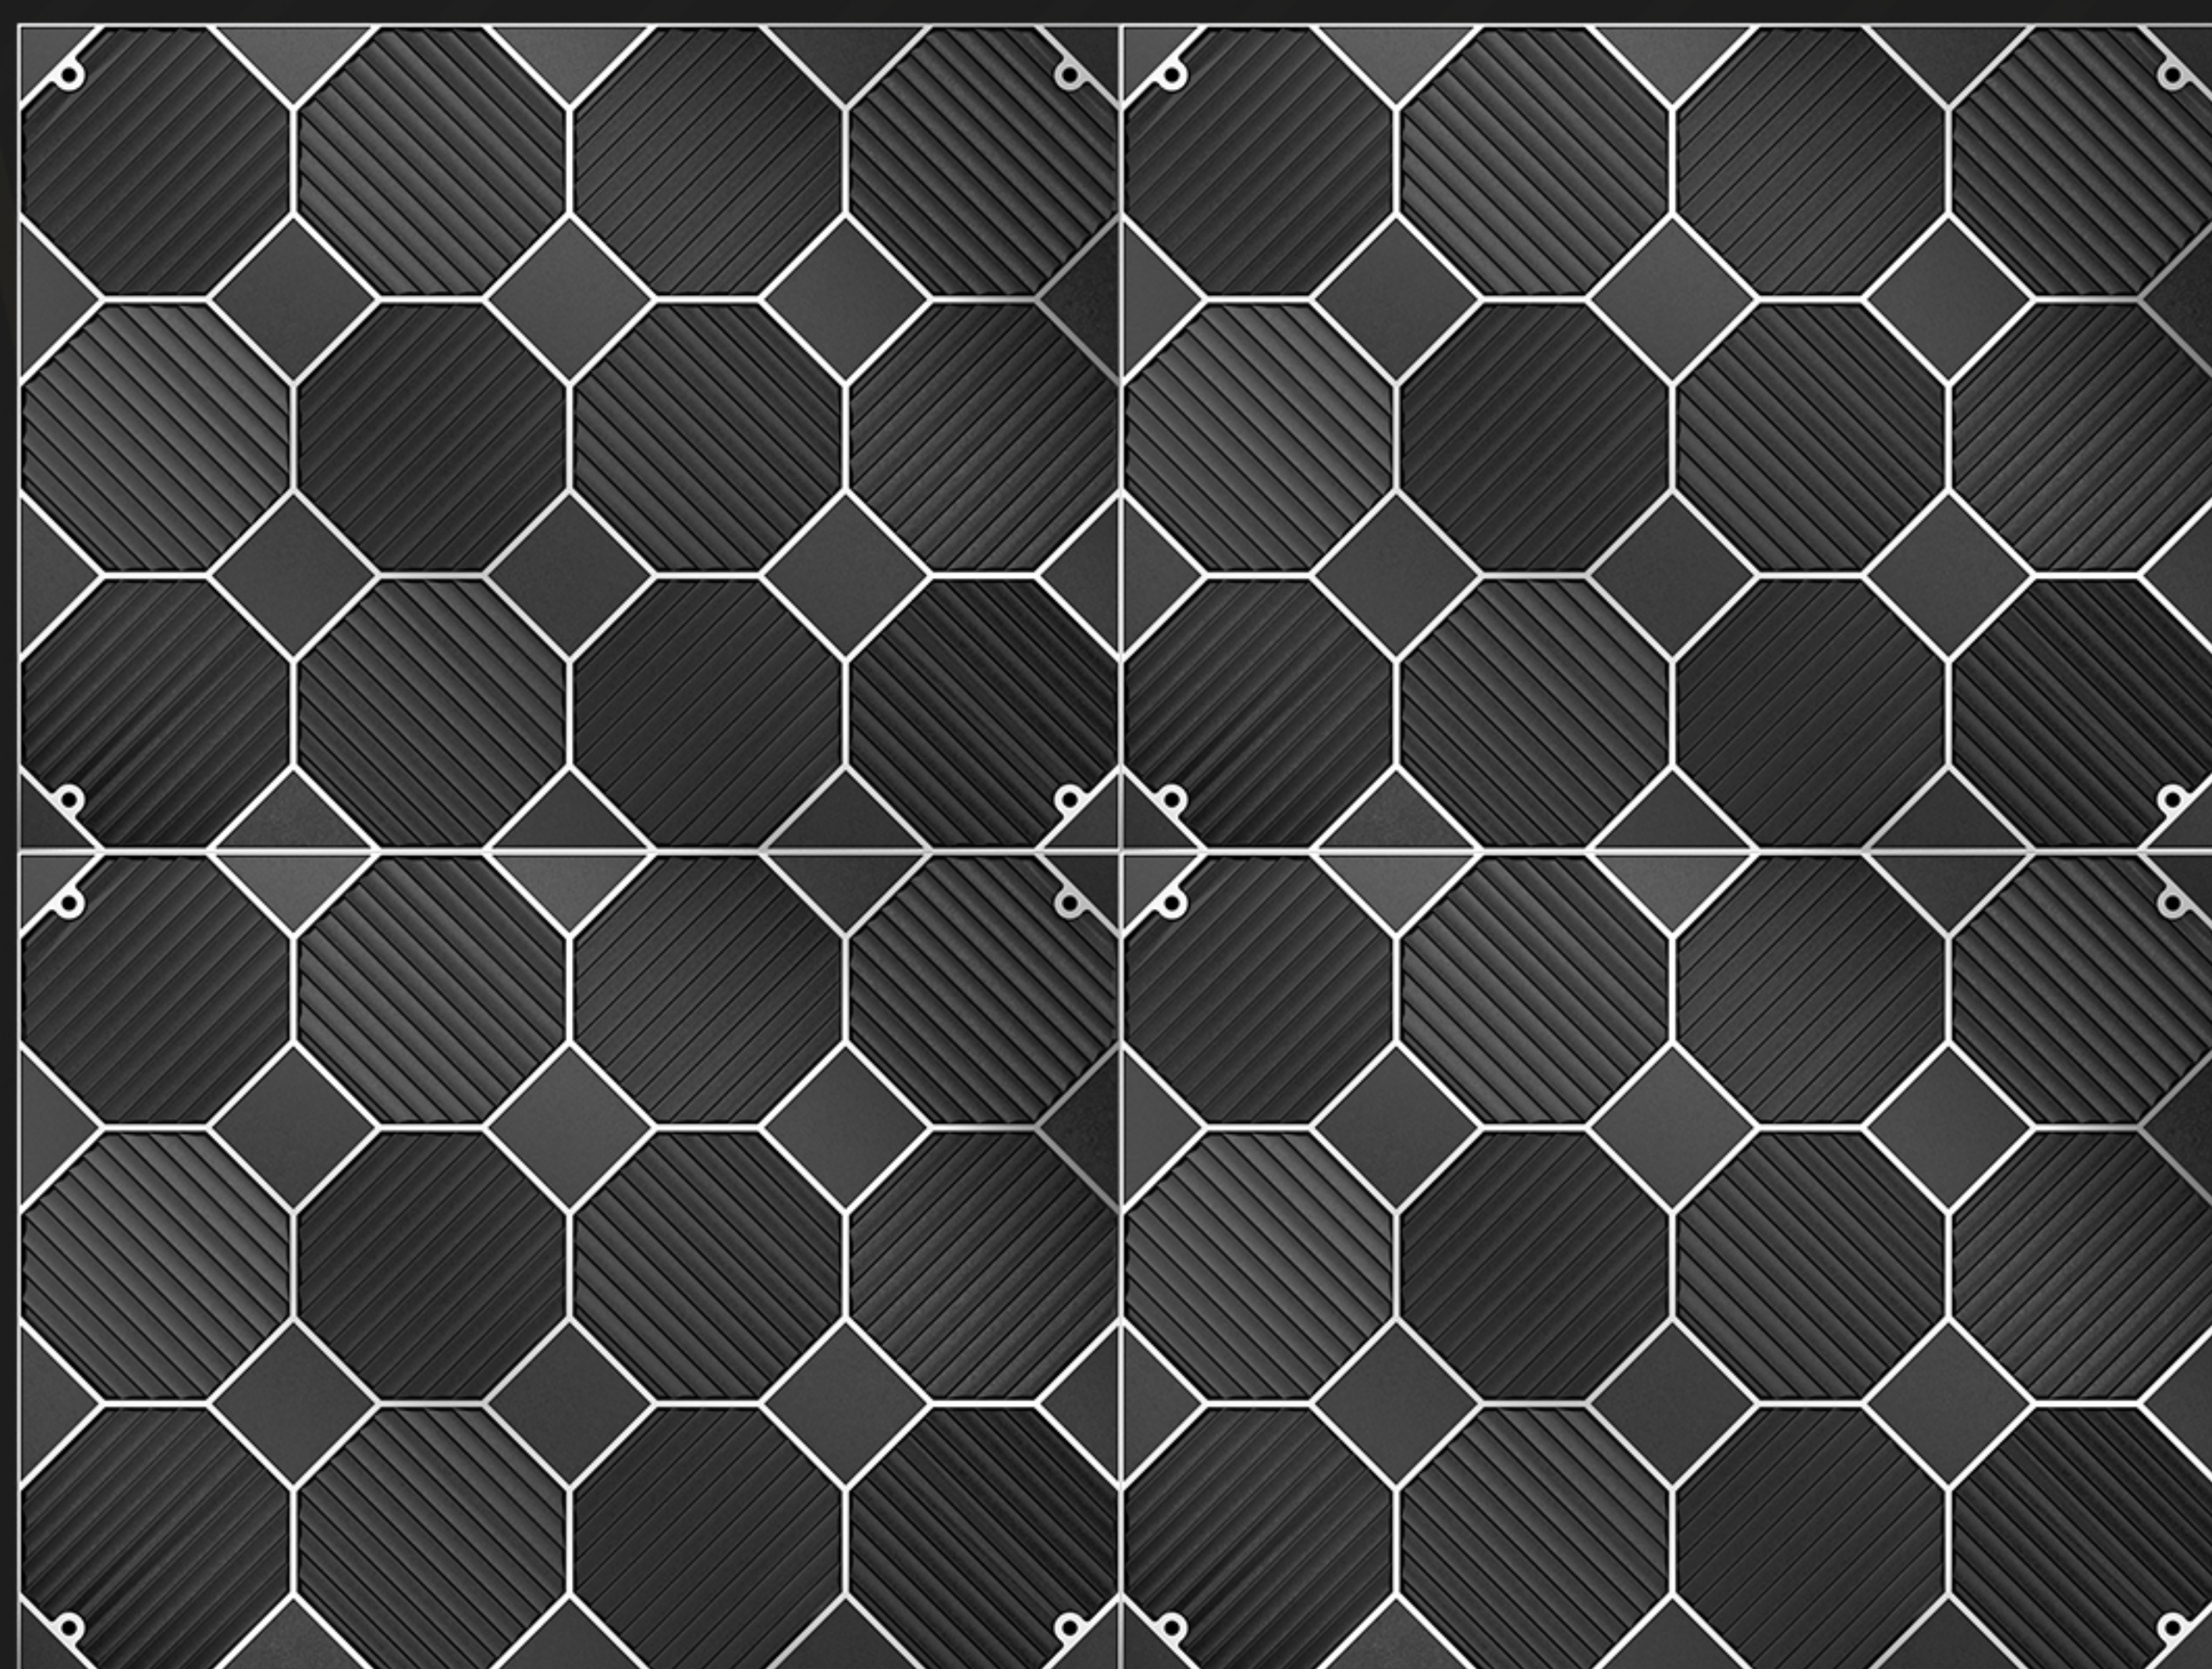

Can Do Seamless Splicing

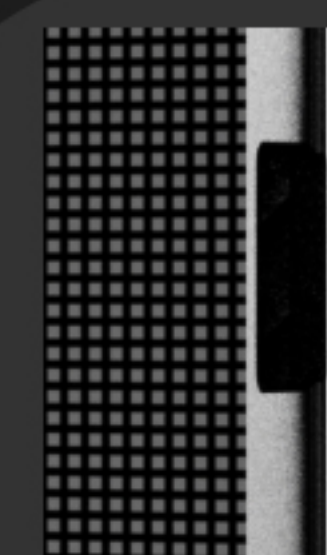

Handles

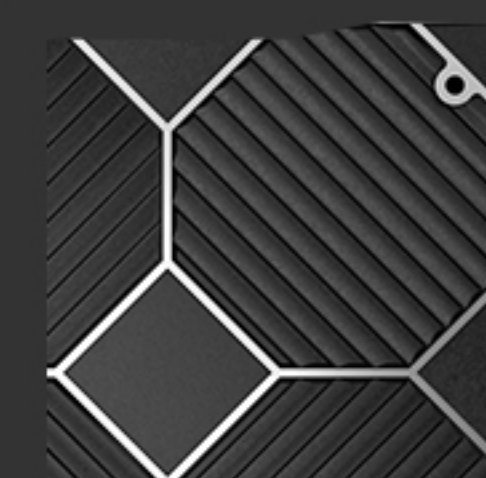

Corner Cover



Power Box



Fast Lock
Between Left and
Right Cabinets






Stowing **A**nd **H**anging

Optional vertical installation and hanging beam installation



Hanging Beam Installation

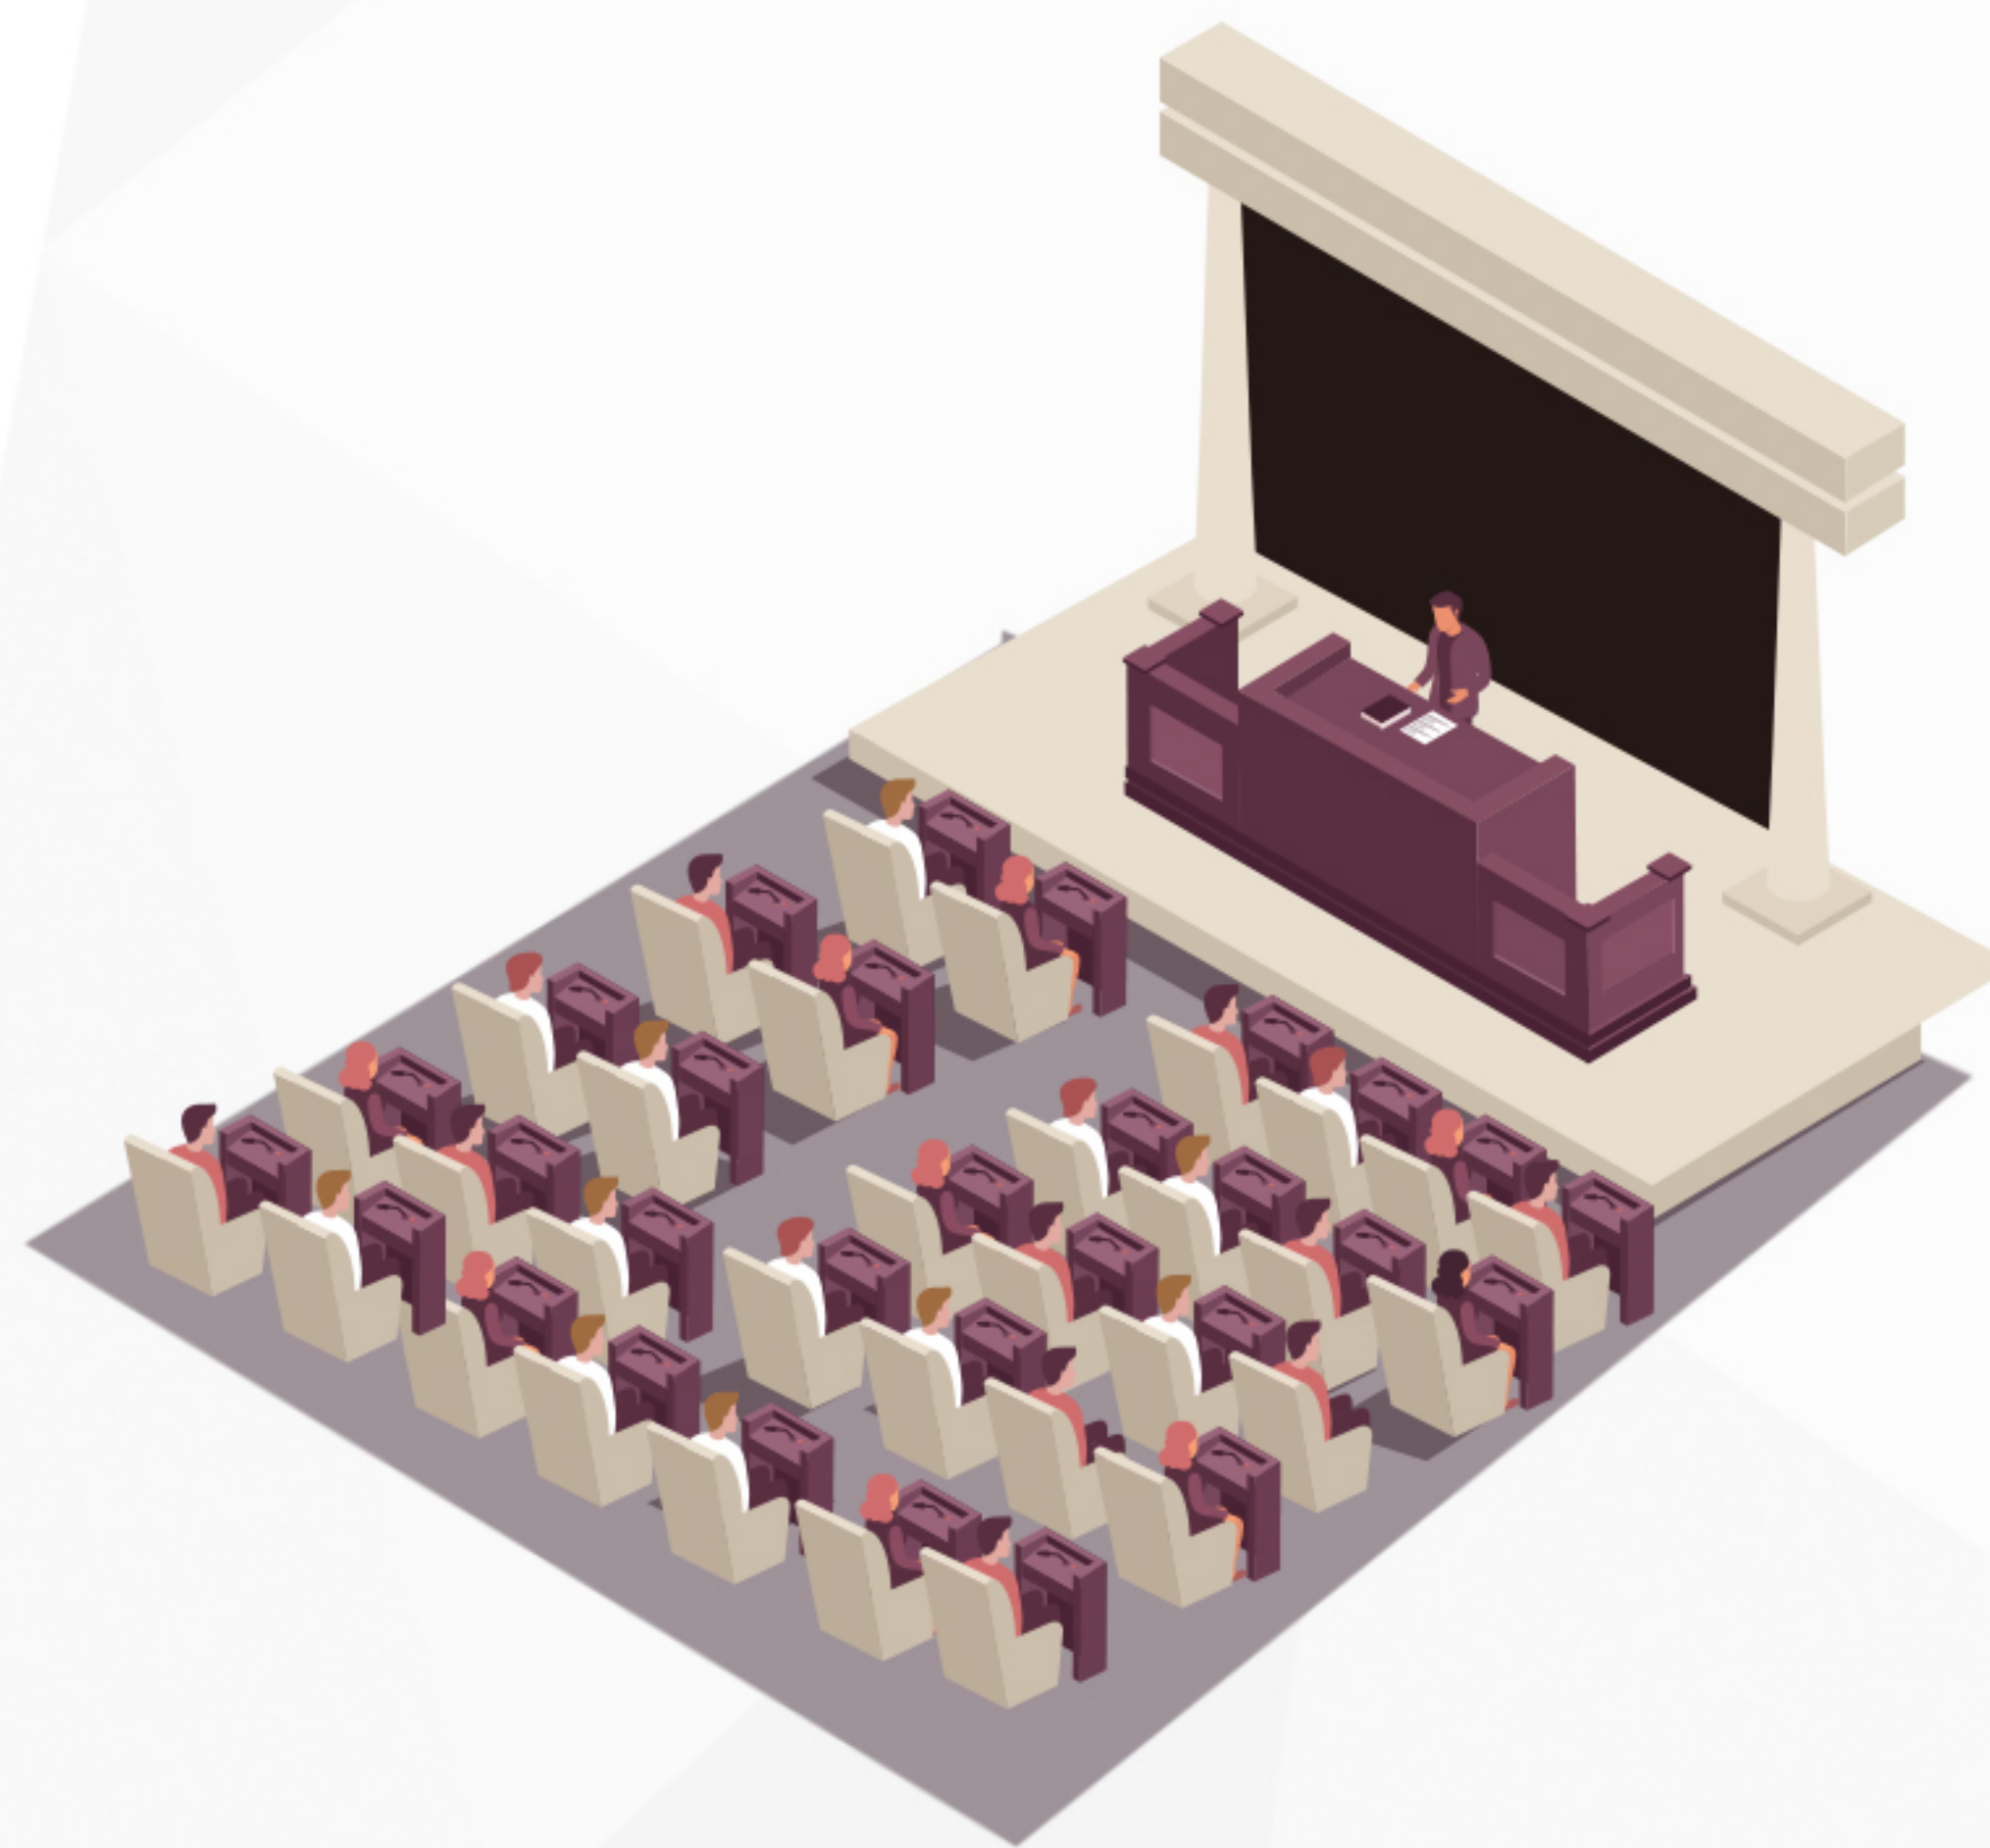

Vertical Installation





Product Specification

Advanced locking system safety, Mechanism enables one-man installation

Pixel Pitch	1.25	1.538	1.667	1.86	2.5	3
LED Lamp	SMD1010	SMD1212	SMD 1212/1515	SMD1515	SMD2020	SMD2020
Density (dots/m2)	695556	401111	360000	284444	160000	111111
Brightness	≤500 nits	≤600 nits	≤800 nits	≤800 nits	≤900 nits	≤900 nits
IP Rating	IP45	IP45	IP45	IP45	IP45	IP45
Cabinet Materiel	Die-casting Aluminum					
Scan	64 scan	52 scan	45 scan	43 scan	32 scan	26 scan
Module Weight	0.3 kg	0.3 kg	0.3 kg	0.3 kg	0.3 kg	0.3 kg
Cabinet Weight	5.5 kg	5.5 kg	5.5 kg	5.5 kg	5.5 kg	5.5 kg
Module Size (mm)	320*160	320*160	320*160	320*160	320*160	320*160
Cabinet Size (mm)	640*480*60	640*480*60	640*480*60	640*480*60	640*480*60	640*480*60
Module Pixel	256*128 dots	208*104 dots	192*96 dots	172*86 dots	128*64 dots	104*52 dots
Cabinet Pixel	512*384 dots	416*312 dots	384*288 dots	344*258 dots	256*192 dots	208*156 dots
Max Power	600 w/sqm	600 w/sqm	600 w/sqm	600 w/sqm	600 w/sqm	600 w/sqm
Average Power	360 w/sqm	360 w/sqm	360 w/sqm	360 w/sqm	360 w/sqm	360 w/sqm
Viewing Angle	H140 (+70/-70) deg V140 (+70/-70) deg					
Control Way	Synchronous / Asynchronous					
Gray Scale	16 bit					
Operating System	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI					
Work Humidity	10% ~ 90%					
Work Temperature	-20 ~ + 65°C					

Shenzhen Enbon Optoelectronic CO.,LTD

3/ F, Building 1, High-tech Park,Fuyuan Road No.156, Fuhai Street,
Fuyong Town,Baoan District, Shenzhen, China



+86-755-2357 0137



www.enbon.com



enbon led display



enbondisplay



enbon led display



enbon led display