



G Model

Design For Indoor Projects Solution



ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display



Lighter **W**eight **E**asier **O**peration

20% lighter than normal products
Making it more convenient to operate and move




L*H: 500*125(mm)

Module



L*H:1000*500(mm)

Cabinet

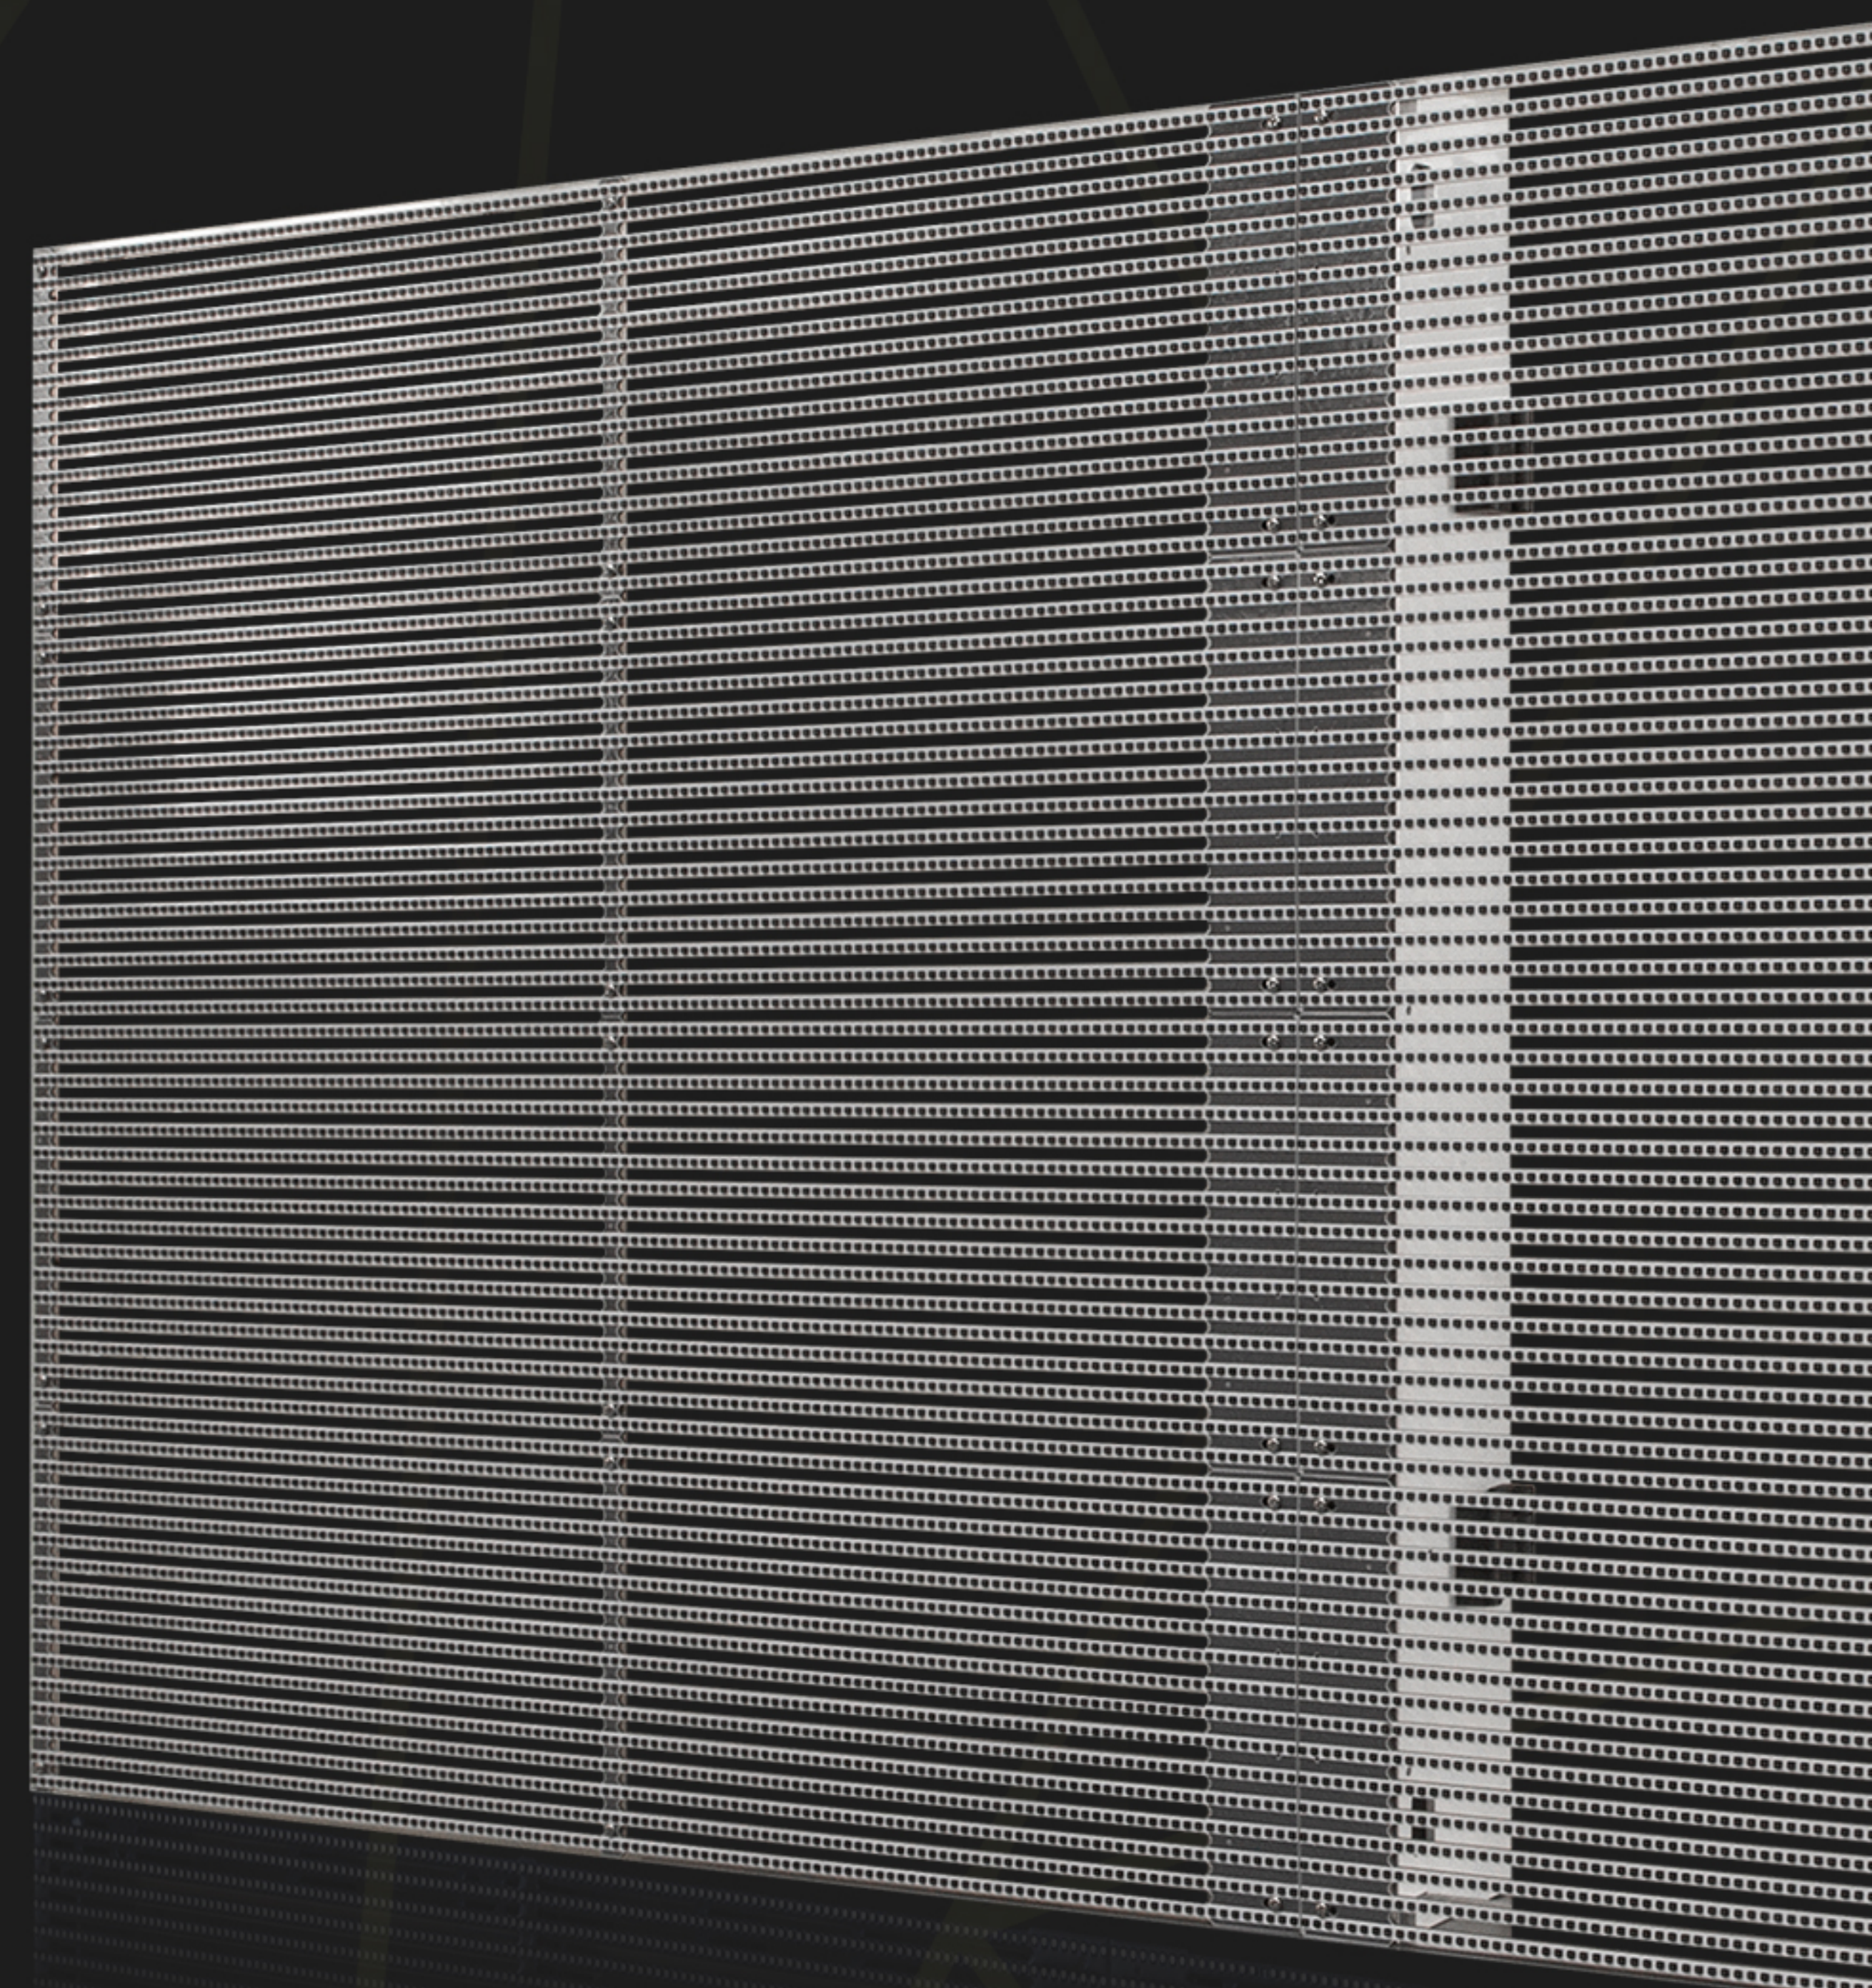

Weight 5.5kg

ENBON GROUP
Spirit & Success, **Together**



Enbon



Enbon **Led** Display

EnBon

High Refresh Rate

High Grayscale



Low Refresh Rate



High Refresh Rate



Low Grayscale



High Grayscale



Stowing **A**nd **H**anging

Optional vertical installation and hanging beam installation



Hanging Beam Installation



Vertical Installation



Product Specification

Advanced locking system safety, Mechanism enables one-man installation

Pixel Pitch	2.6 -5.2	3.91-7.82	5.21-10.42	10.4-10.4
LED Lamp	SMD1415	SMD1921	SMD1921	SMD1921
Density (dots/m2)	73728	32768	18432	9216
Brightness	≥1000-5000 nits	≥1000-5000 nits	≥1000-5000 nits	≥1000-5000 nits
IP Rating	IP45	IP45	IP45	IP45
Cabinet Materiel	Aluminum			
Scan	16 scan	8 scan	4 scan	2 scan
Module Weight	0.25 kg	0.25 kg	0.25 kg	0.25 kg
Cabinet Weight	5.5 kg	5.5 kg	5.5 kg	5.5 kg
Module Size (mm)	500*125	500*125	500*125	500*125
Cabinet Size (mm)	1000*500*75	1000*500*75	1000*500*75	1000*500*75
Module Pixel	192*24 dots	128*16 dots	96*12dots	48*12 dots
Cabinet Pixel	384*96 dots	256*64 dots	192*48 dots	96*48 dots
Max Power	680 w/sqm	680 w/sqm	680 w/sqm	680 w/sqm
Average Power	230 w/sqm	230 w/sqm	230 w/sqm	230 w/sqm
Viewing Angle	H140 (+70/-70) deg V140 (+70/-70) deg			
Control Way	Synchronous / Asynchronous			
Gray Scale	16 bit			
Operating System	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI			
Work Humidity	10% ~ 90%			
Work Temperature	-20 ~ + 65°C			