




# LED Poster Model

High-quality Small Spacing Indoor Led Display

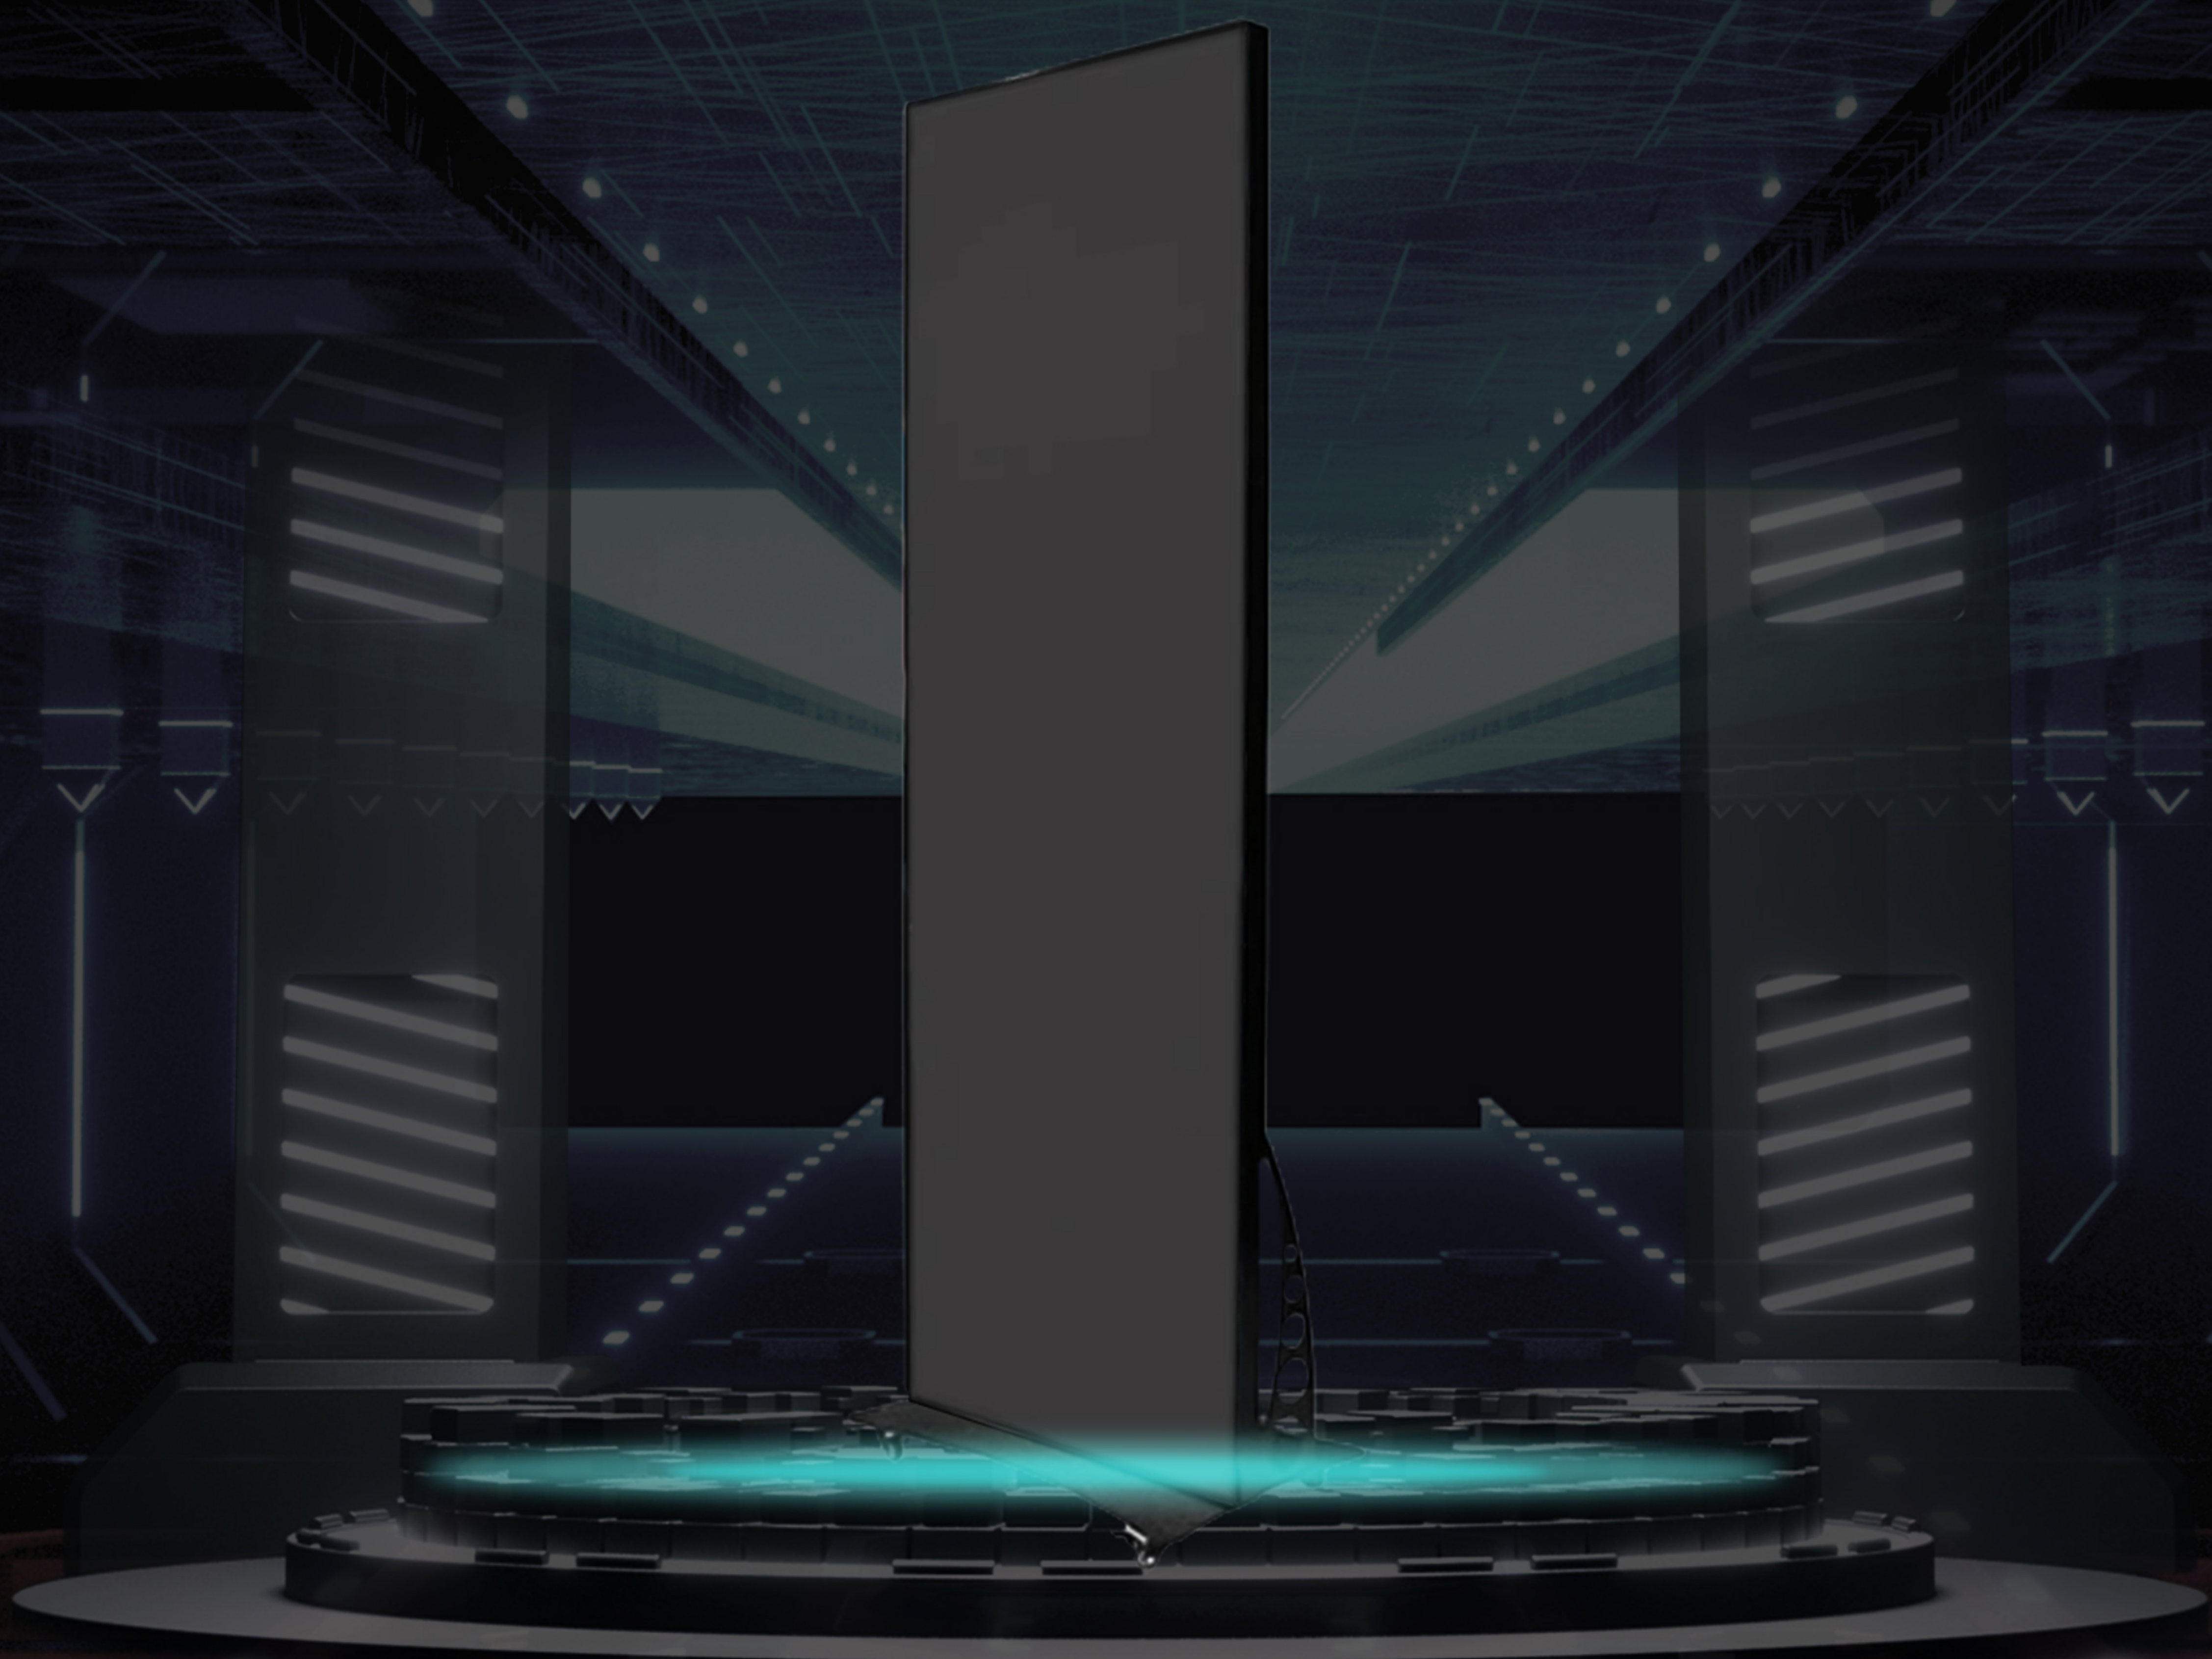

**ENBON** GROUP  
Spirit & Success, **Together**



Enbon



Enbon **Led** Display





# STRUCTURAL PARAMETER

Easier to understand our products



L\*H: 320\*160(mm)

Module



L\*H:640\*1920(mm)

Cabinet



Weight 30kg

**ENBON** GROUP  
Spirit & Success, **Together**



Enbon



Enbon **Led** Display



# EnBon

## High Refresh Rate

## High Grayscale



Low Refresh Rate



High Refresh Rate



Low Grayscale



High Grayscale





# Usage Scenario







# Product Specification

Advanced locking system safety, Mechanism enables one-man installation

Pixel Pitch	1.86	2	2.5
LED Lamp	SMD1515	SMD1515	SMD2020
Density (dots/m²)	355000	307200	196608
Brightness	≥800 nits	≥800 nits	≥800 nits
IP Rating	IP45	IP45	IP45
Cabinet Materiel	Iron		
Refresh Rate	3840 Hz	3840 Hz	3840 Hz
Scan	43 scan	40 scan	32 scan
Cabinet Weight	30 kg	30 kg	30 kg
Module Size (mm)	320*160	320*160	320*160
Cabinet Size (mm)	640*1920*40	640*1920*40	640*1920*40
Adviced viewing	≥2m	≥3m	≥4m
Input Voltage	100-240V / 50-60HZ	100-240V / 50-60HZ	100-240V / 50-60HZ
Max Power	0.8 kw	0.8 kw	0.8 kw
Average Power	0.38 kw	0.38 kw	0.38 kw
Viewing Angle	H140 (+70/-70) deg V140 (+70/-70) deg		
Control Way	Synchronous / Asynchronous		
Gray Scale	16 bit		
Operating System	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI		
Work Humidity	10% ~90%		
Work Temperature	-20℃ ~ + 65℃		

Shenzhen Enbon Optoelectronic CO.,LTD

3/ F, Building 1, High-tech Park,Fuyuan Road No.156, Fuhai Street,  
Fuyong Town,Baoan District, Shenzhen, China



Enbon



Enbon Led Display