



ENBON GROUP
Spirit & Success, **Together**

FC Pro Series

Outdoor Fixed Front And Back Service Design



Enbon



enbon.com



Enbon Led Display

Different Modules Use **Same HUB**

Customize The Box Size
According To The Display Size




480*320(mm)

Module



960*960*87(mm)

Cabinet

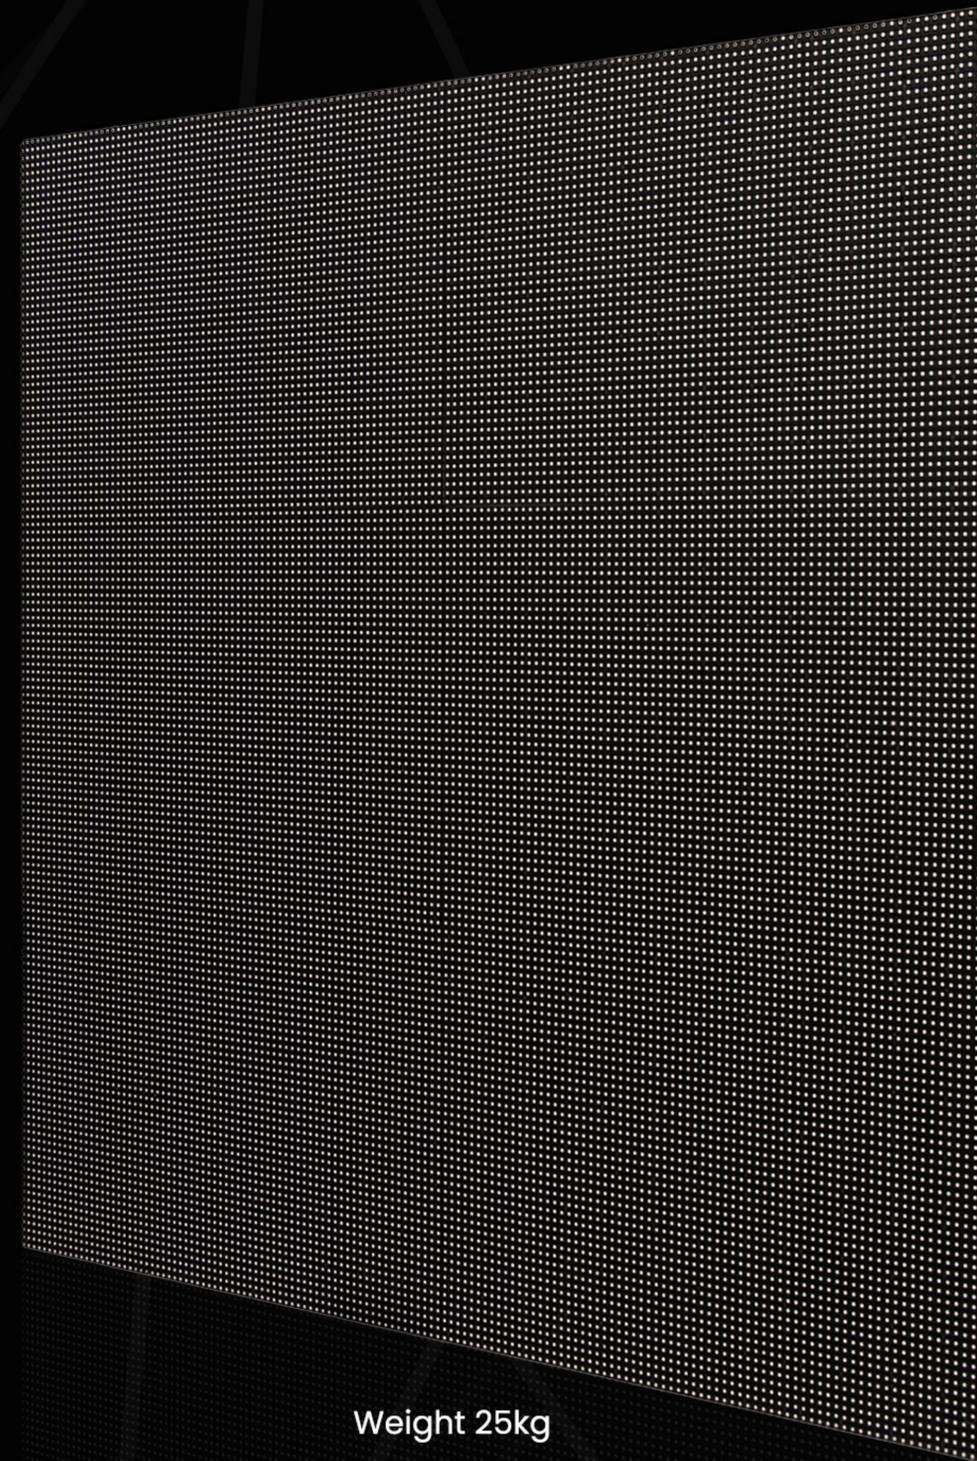

Weight 25kg



Enbon



enbon.com



Enbon Led Display



ENBON GROUP
Spirit & Success, **Together**

Thinner Panels Lower Cost

10 in 1 flight case saves more space
and transportation cost



24 panels can be placed horizontally
in a regular 20-foot or 40-foot truck



Enbon



enbon.com



Enbon Led Display


Multi~~ole~~ **Angles**

More Possibility

Provide a variety of splicing options to make your creativity unrestricted



Curved Version

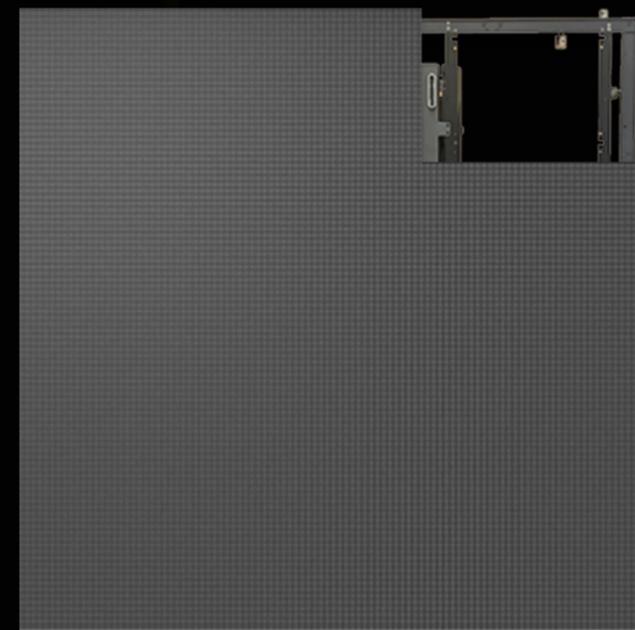

Front And Rear Maintenance



Enbon




enbon.com



Enbon Led Display

Product **D**etails

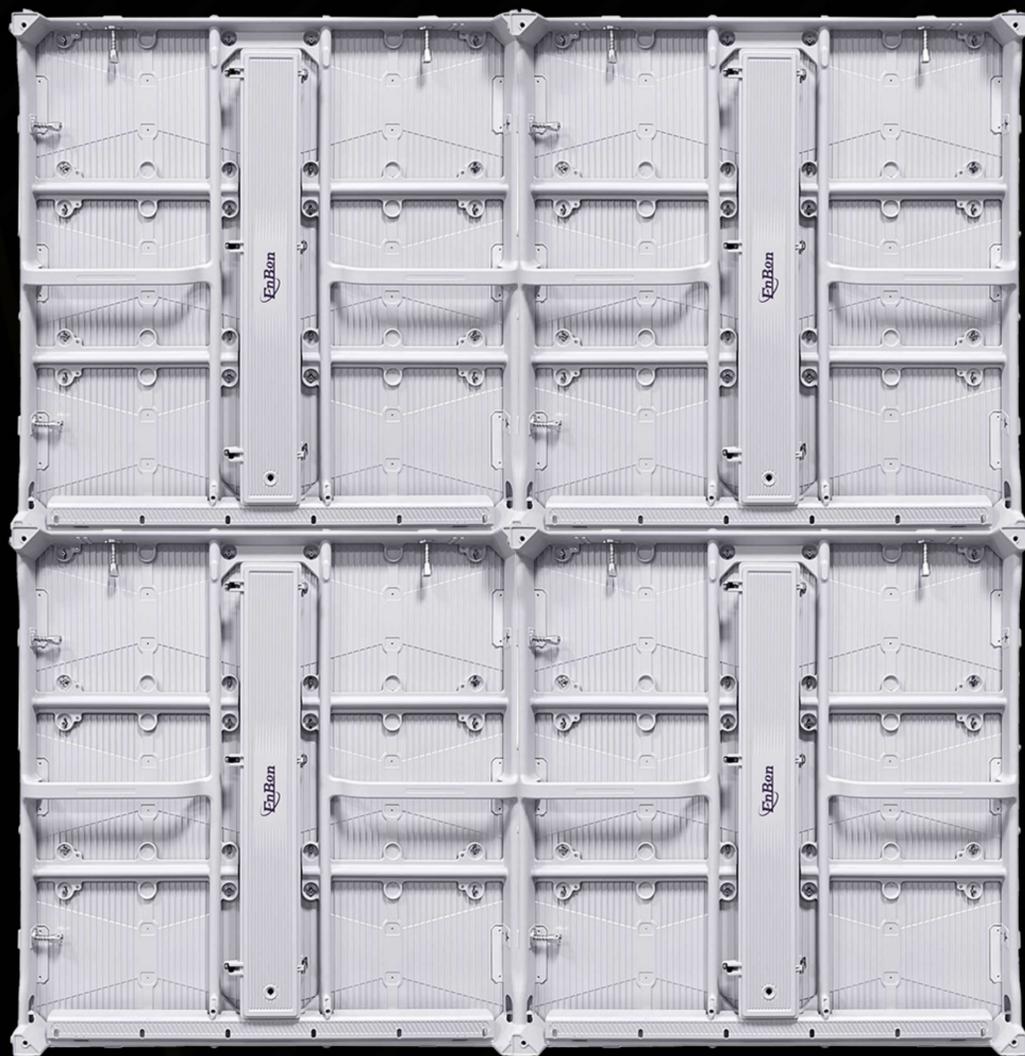

Can Do Seamless Splicing



Safety Lock



Corner Cover



Power Box



Fast Lock
Between Left and
Right Cabinets



Enbon




enbon.com



Enbon Led Display

Module Connection Port



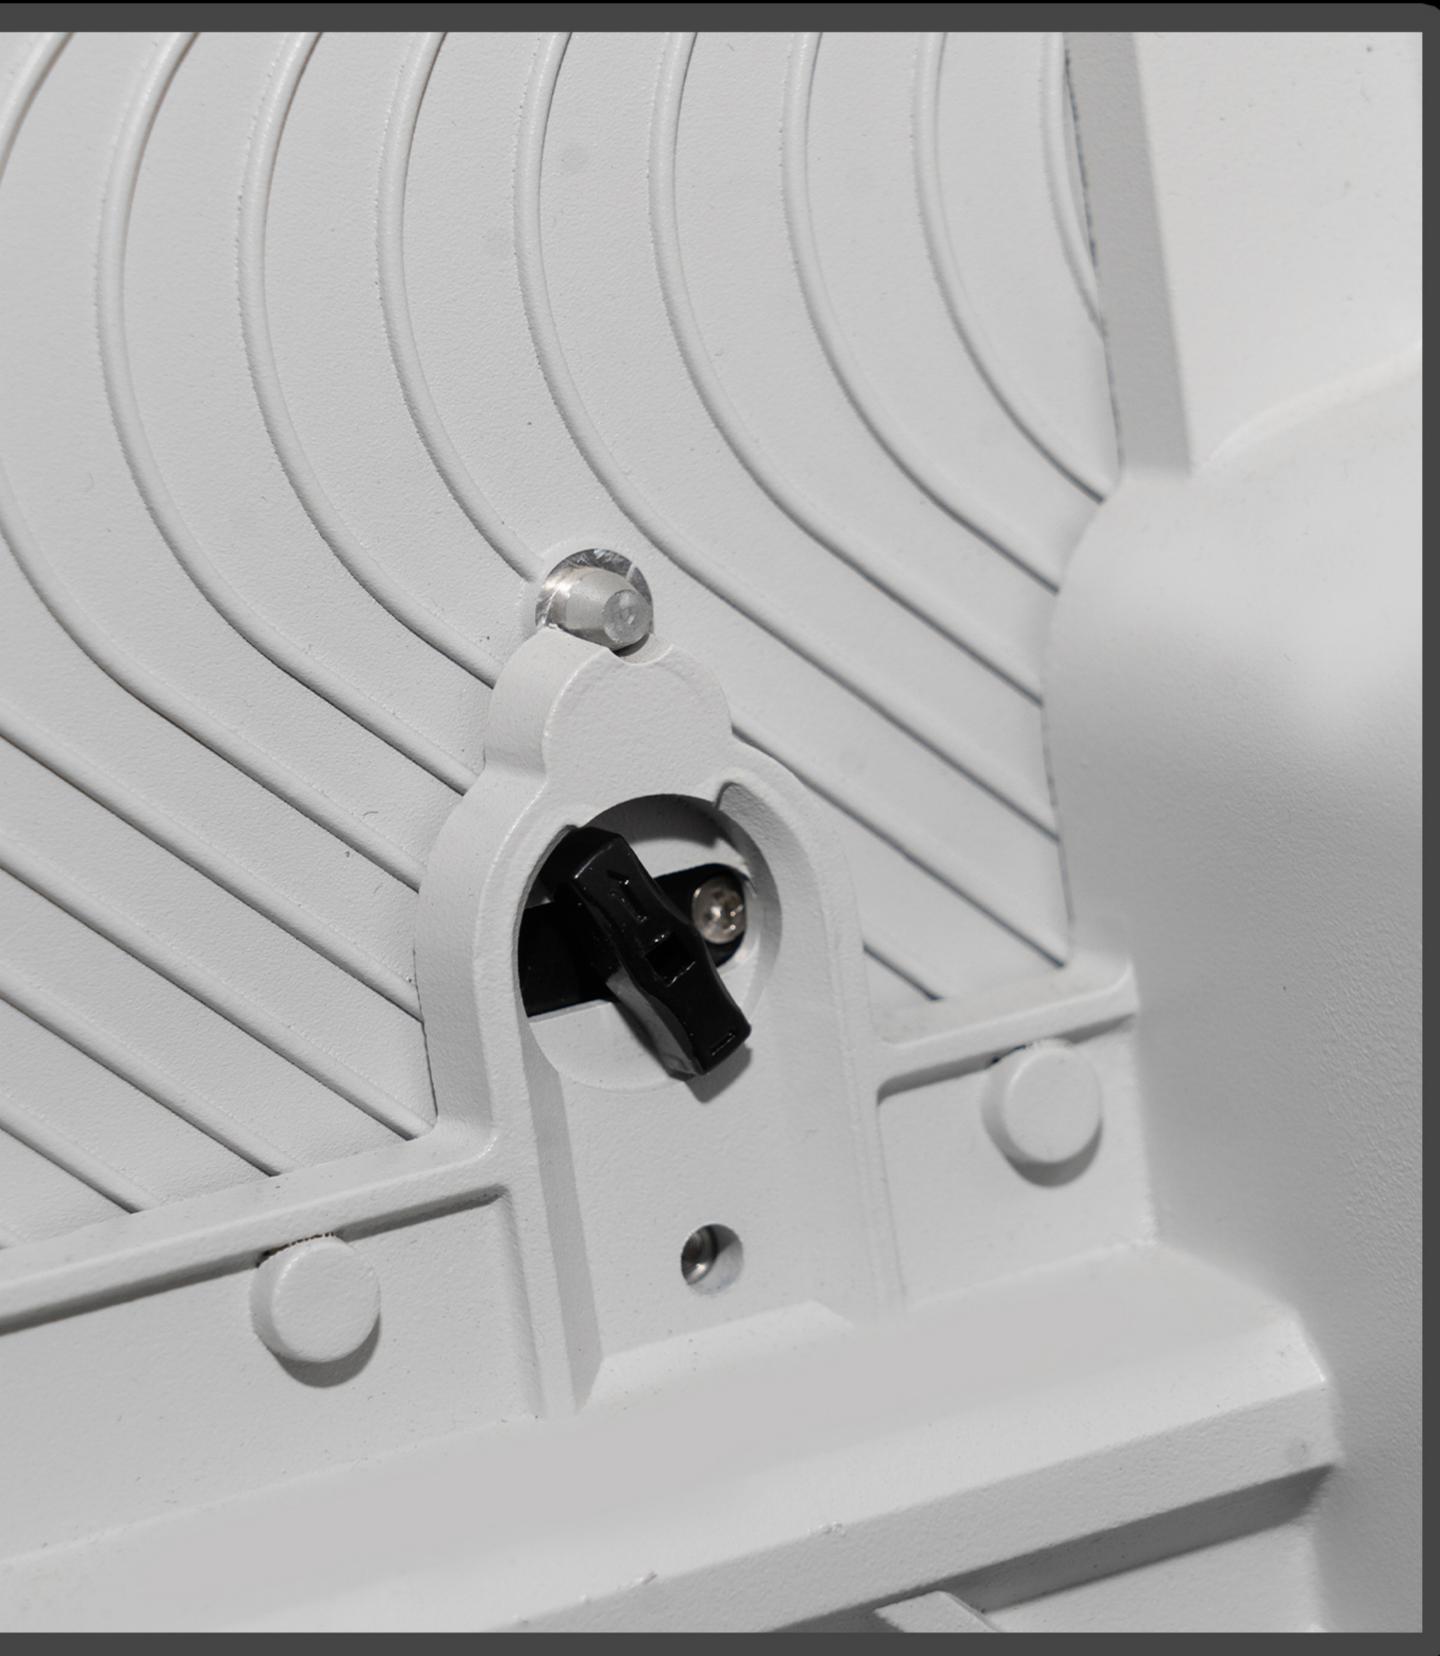

Module Button Lock

Protect the security
of the module



Enbon




enbon.com



Enbon Led Display

Front And Rear Installation And Maintenance

Front and rear installation and maintenance, flexible installation and convenient maintenance

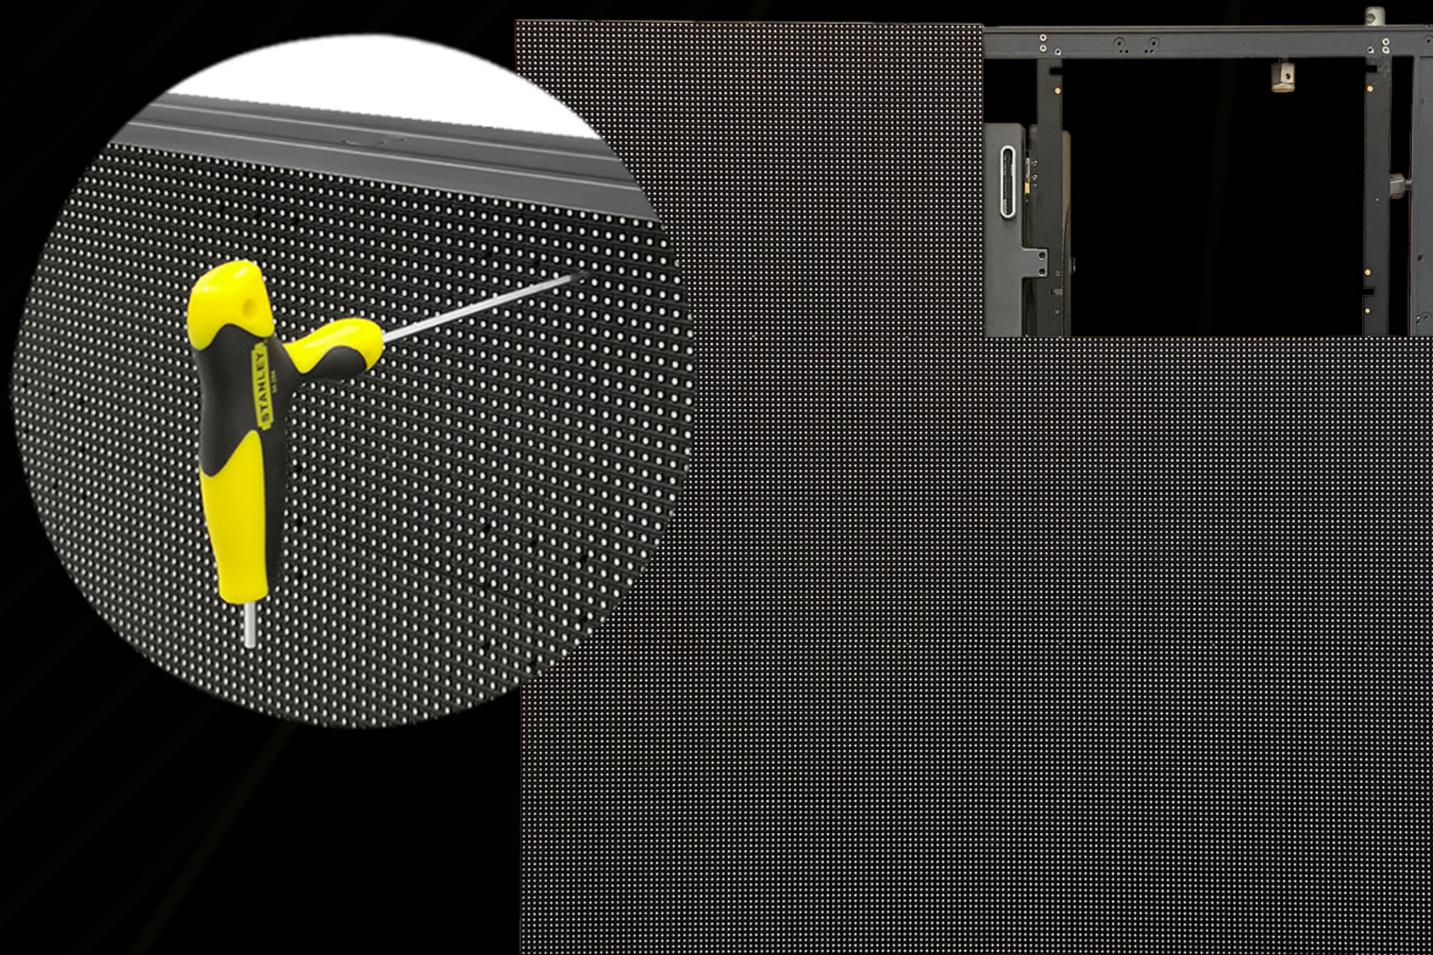

Fixed Installation



Enbon



enbon.com



Enbon Led Display

Extremely **Light** And **Thin**



 Lightweight Cabinet **25kg**

 **Aluminum** Module and Cabinet



Enbon




enbon.com



Enbon Led Display


Low Power Consumption

Compared with similar products on the market, it saves **30%** power

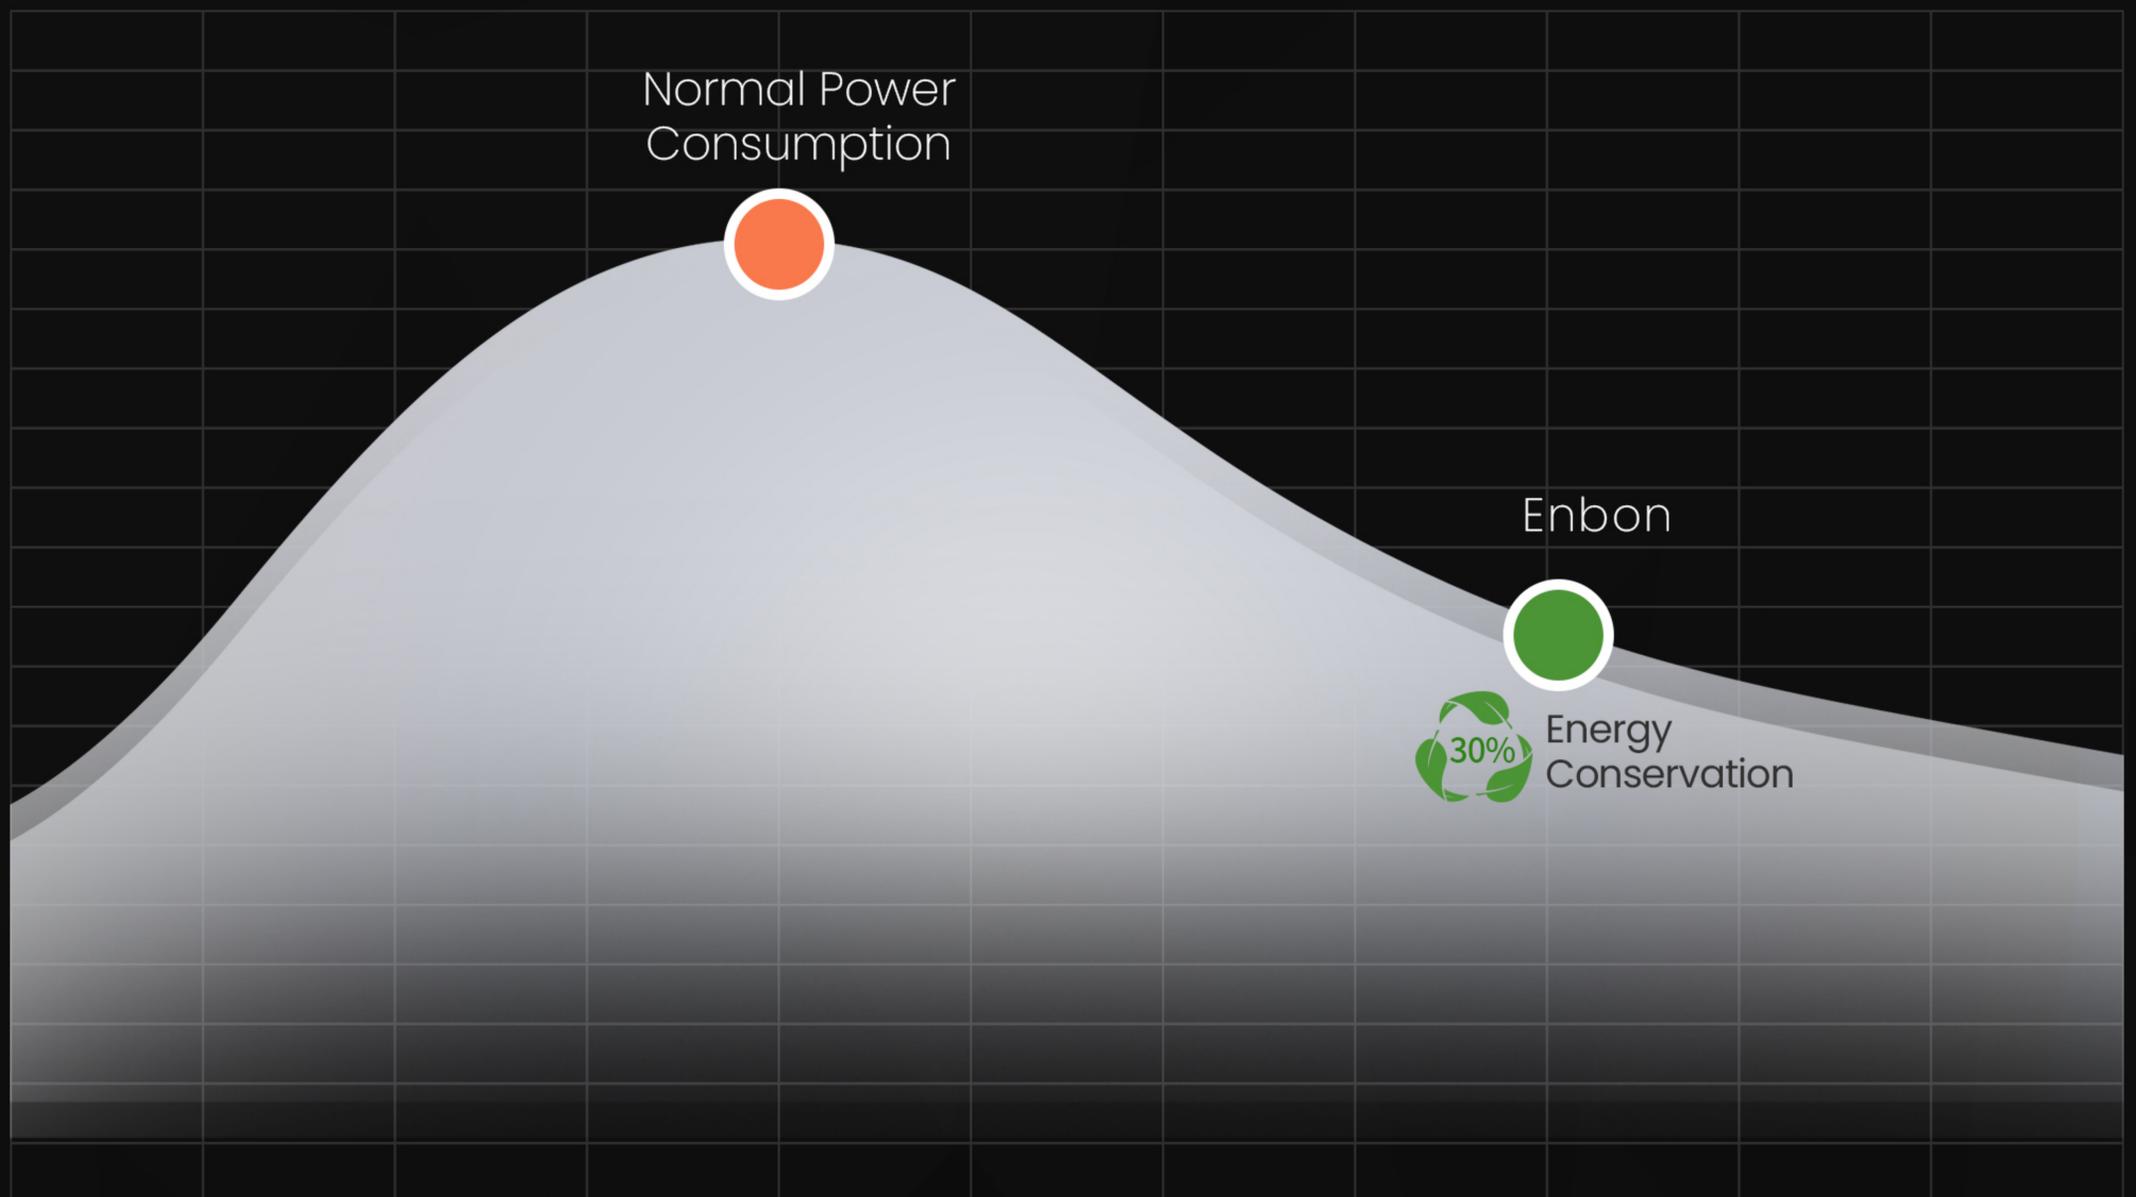

IP65 Waterproof

Uniform light emission, good waterproof performance. It can be directly rinsed with water outdoor, and the protection level can reach IP65

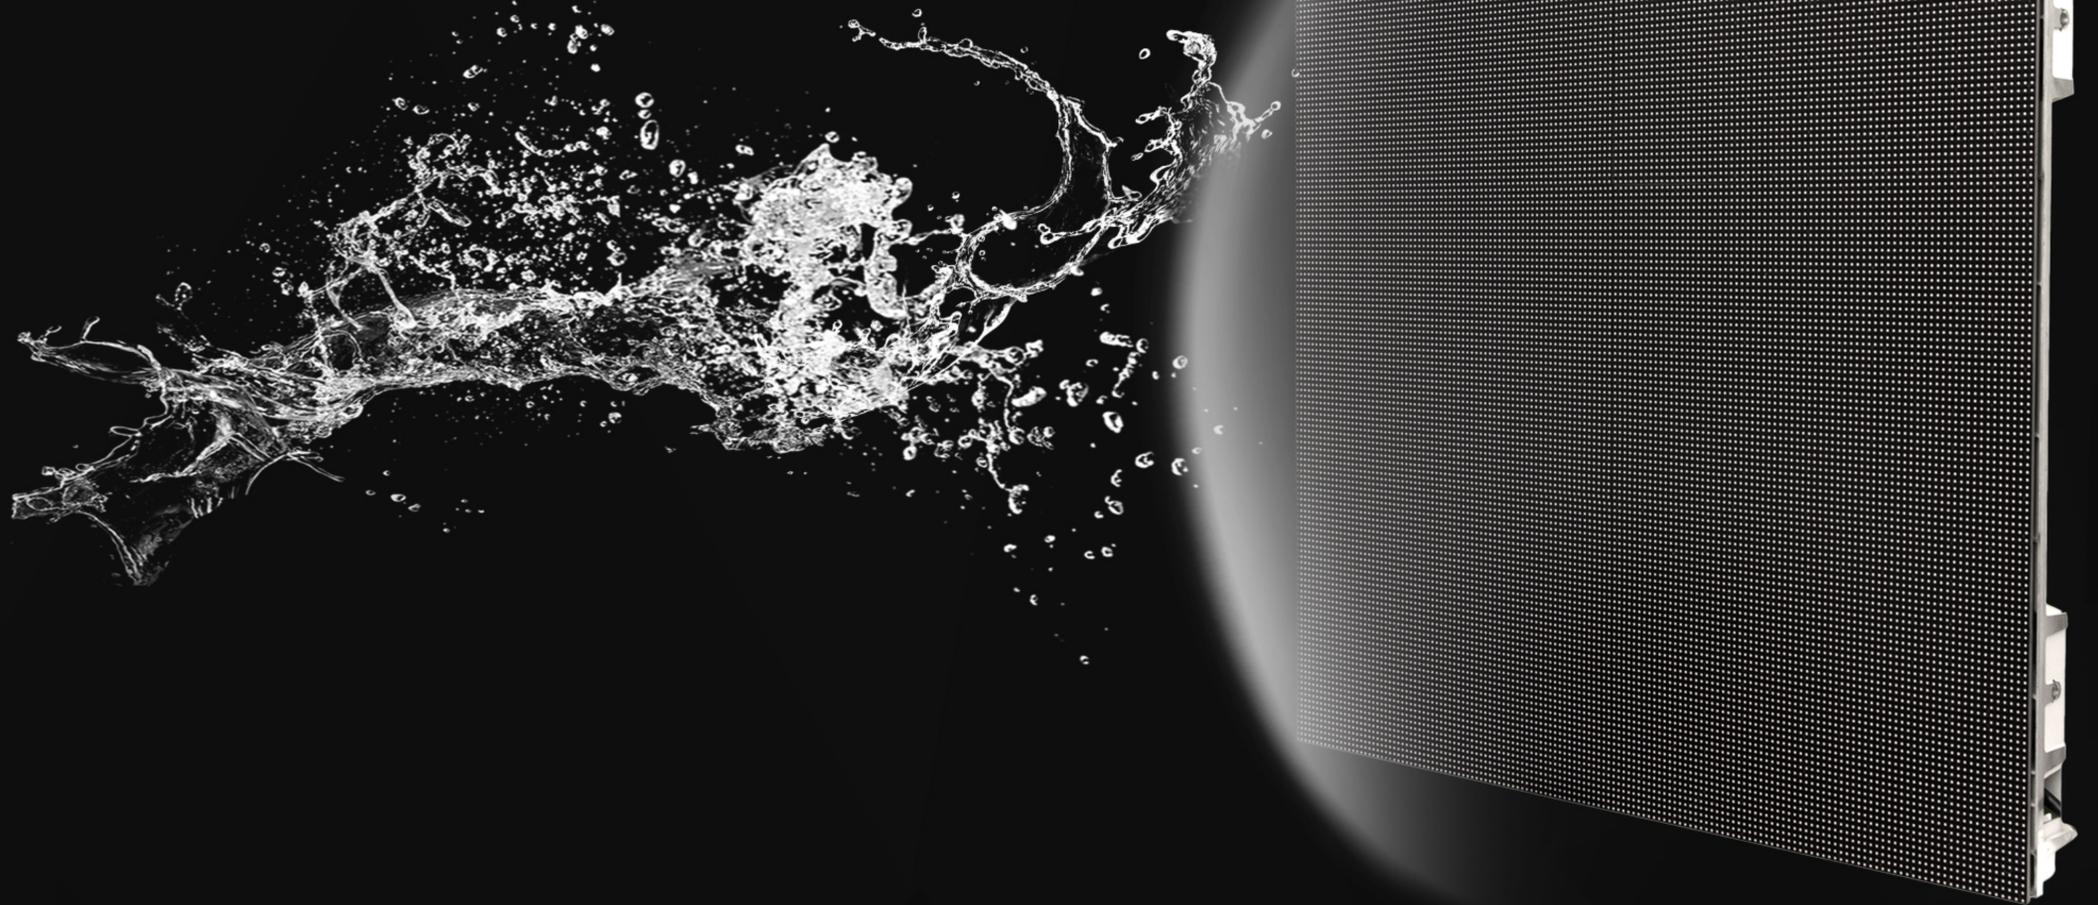

Enbon



enbon.com



Enbon Led Display

High Refresh Rate

High Grayscale



Low Refresh Rate

High Refresh Rate



Low Grayscale

High Grayscale



Enbon



enbon.com



Enbon Led Display

Stowing And Hanging

Optional vertical installation and hanging beam installation



Hanging Beam Installation



Vertical Installation

Specification

Pixel Pitch	4.44	5.7	6.67	8	10
LED Lamp	SMD1921	SMD2727	SMD2727	SMD2727	SMD2727
Density (dots/m²)	50625	30625	22500	15625	10000
Brightness	≥6500 nits	5500~10000nits	5500~10000nits	5500~10000nits	5500~10000nits
IP Rating	IP65				
Cabinet Materiel	Die-casting Aluminum				
Refresh Rate(Hz)	3840/7680				
Scan	9 scan	7 scan	6 scan	3 scan	2 scan
Cabinet Weight	25 kg				
Module Size (mm)	480*320				
Cabinet Size (mm)	960*960*87				
Module Pixel	108*72 dots	84*56dots	72*48 dots	60*40dots	48*32 dots
Cabinet Pixel	216*216 dots	168*168 dots	144*144 dots	120*120 dots	96*96 dots
Max Power (w/sqm)	Common Anode: 700(P4.44/P5.7/P6.64/P8), 800(P10)		Common Cathode: 550		
Average Power (w/sqm)	Common Anode: 235(P4.44/P5.7/P6.64/P8), 268(P10)		Common Cathode: 185		
Receiving Card	Novastar A5S Plus/Novatar A10S Pro				
Maintenance Method	Front&Rear Maintenance				
Connection	Hardlink				
Viewing Angle	H140 (+70/-70) deg V140 (+70/-70) deg				
Control Way	Synchronous / Asynchronous				
Gray Scale	16 bit				
Operating System	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI				
Work Humidity	10% ~ 90%				
Work Temperature	-20 ~ +65°C				

Shenzhen Enbon Optoelectronic CO.,LTD

8th Floor, Building 1, Jiuzhou industrial Park, No. 10, No. 19 Tongguan Road,
Tianliao Community, Yutang Street, Guangming District, Shenzhen



Enbon



enbon.com



Enbon Led Display