




ENBON GROUP
Spirit & Success, **Together**

FS Plus Series

Small Pitch Cabinet Full Front Service

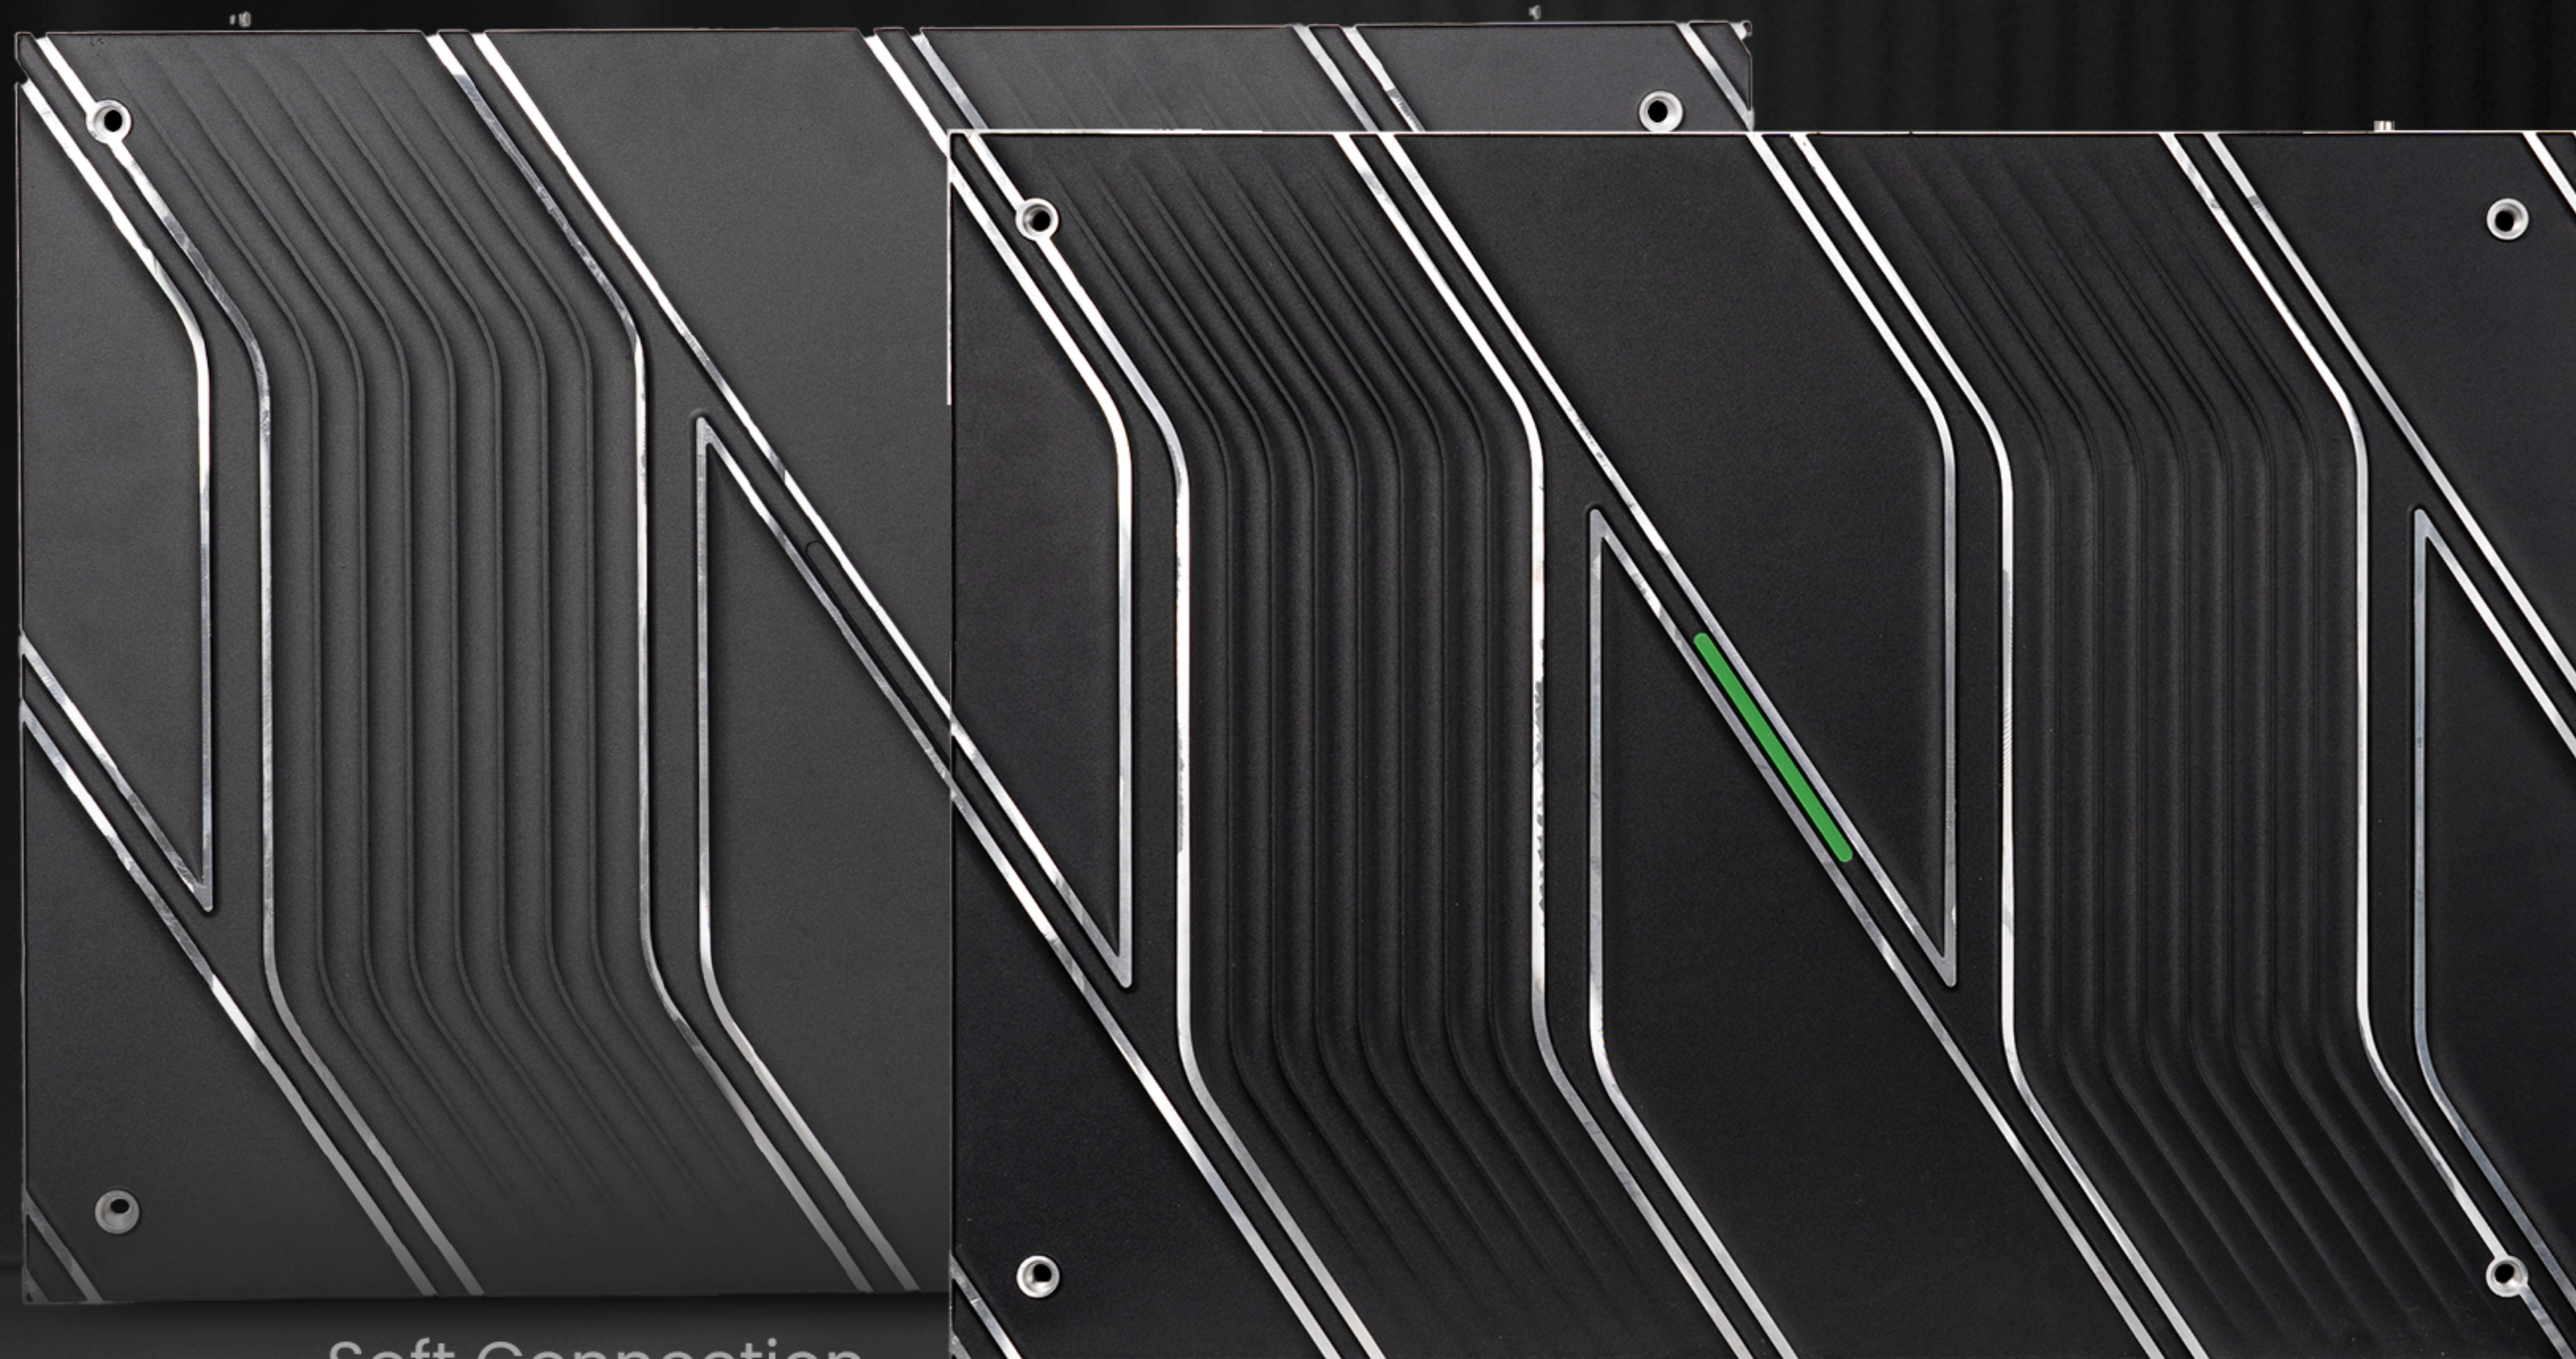

Soft Connection

Hard Link



Enbon



enbon.com



Enbon Led Display

Lighter **Weight** Easier Operation


20% lighter than normal products
Making it more convenient to operate and move




L*H: 320*160(mm)

Module

Soft Connection

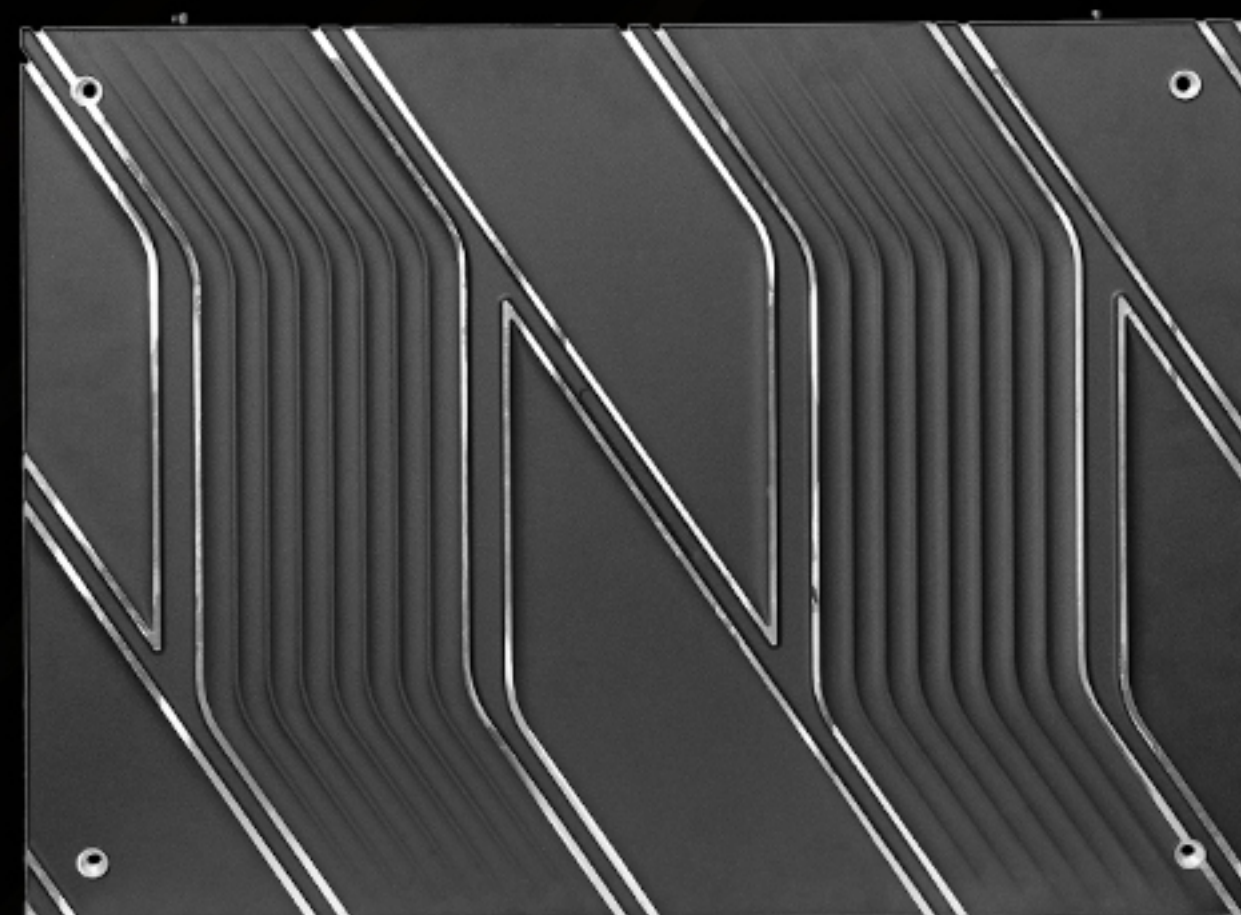


Hard Link

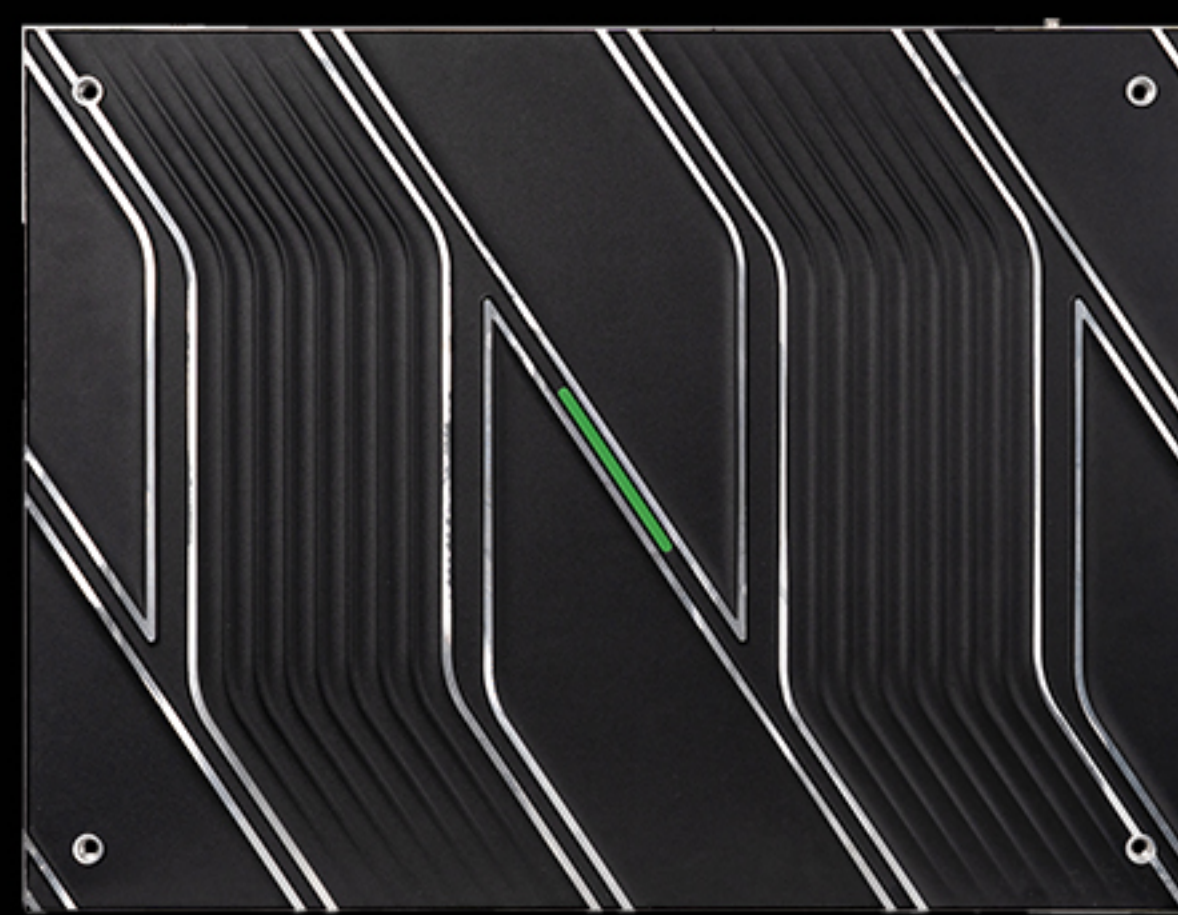

L*H: 640*480(mm)

Cabinet

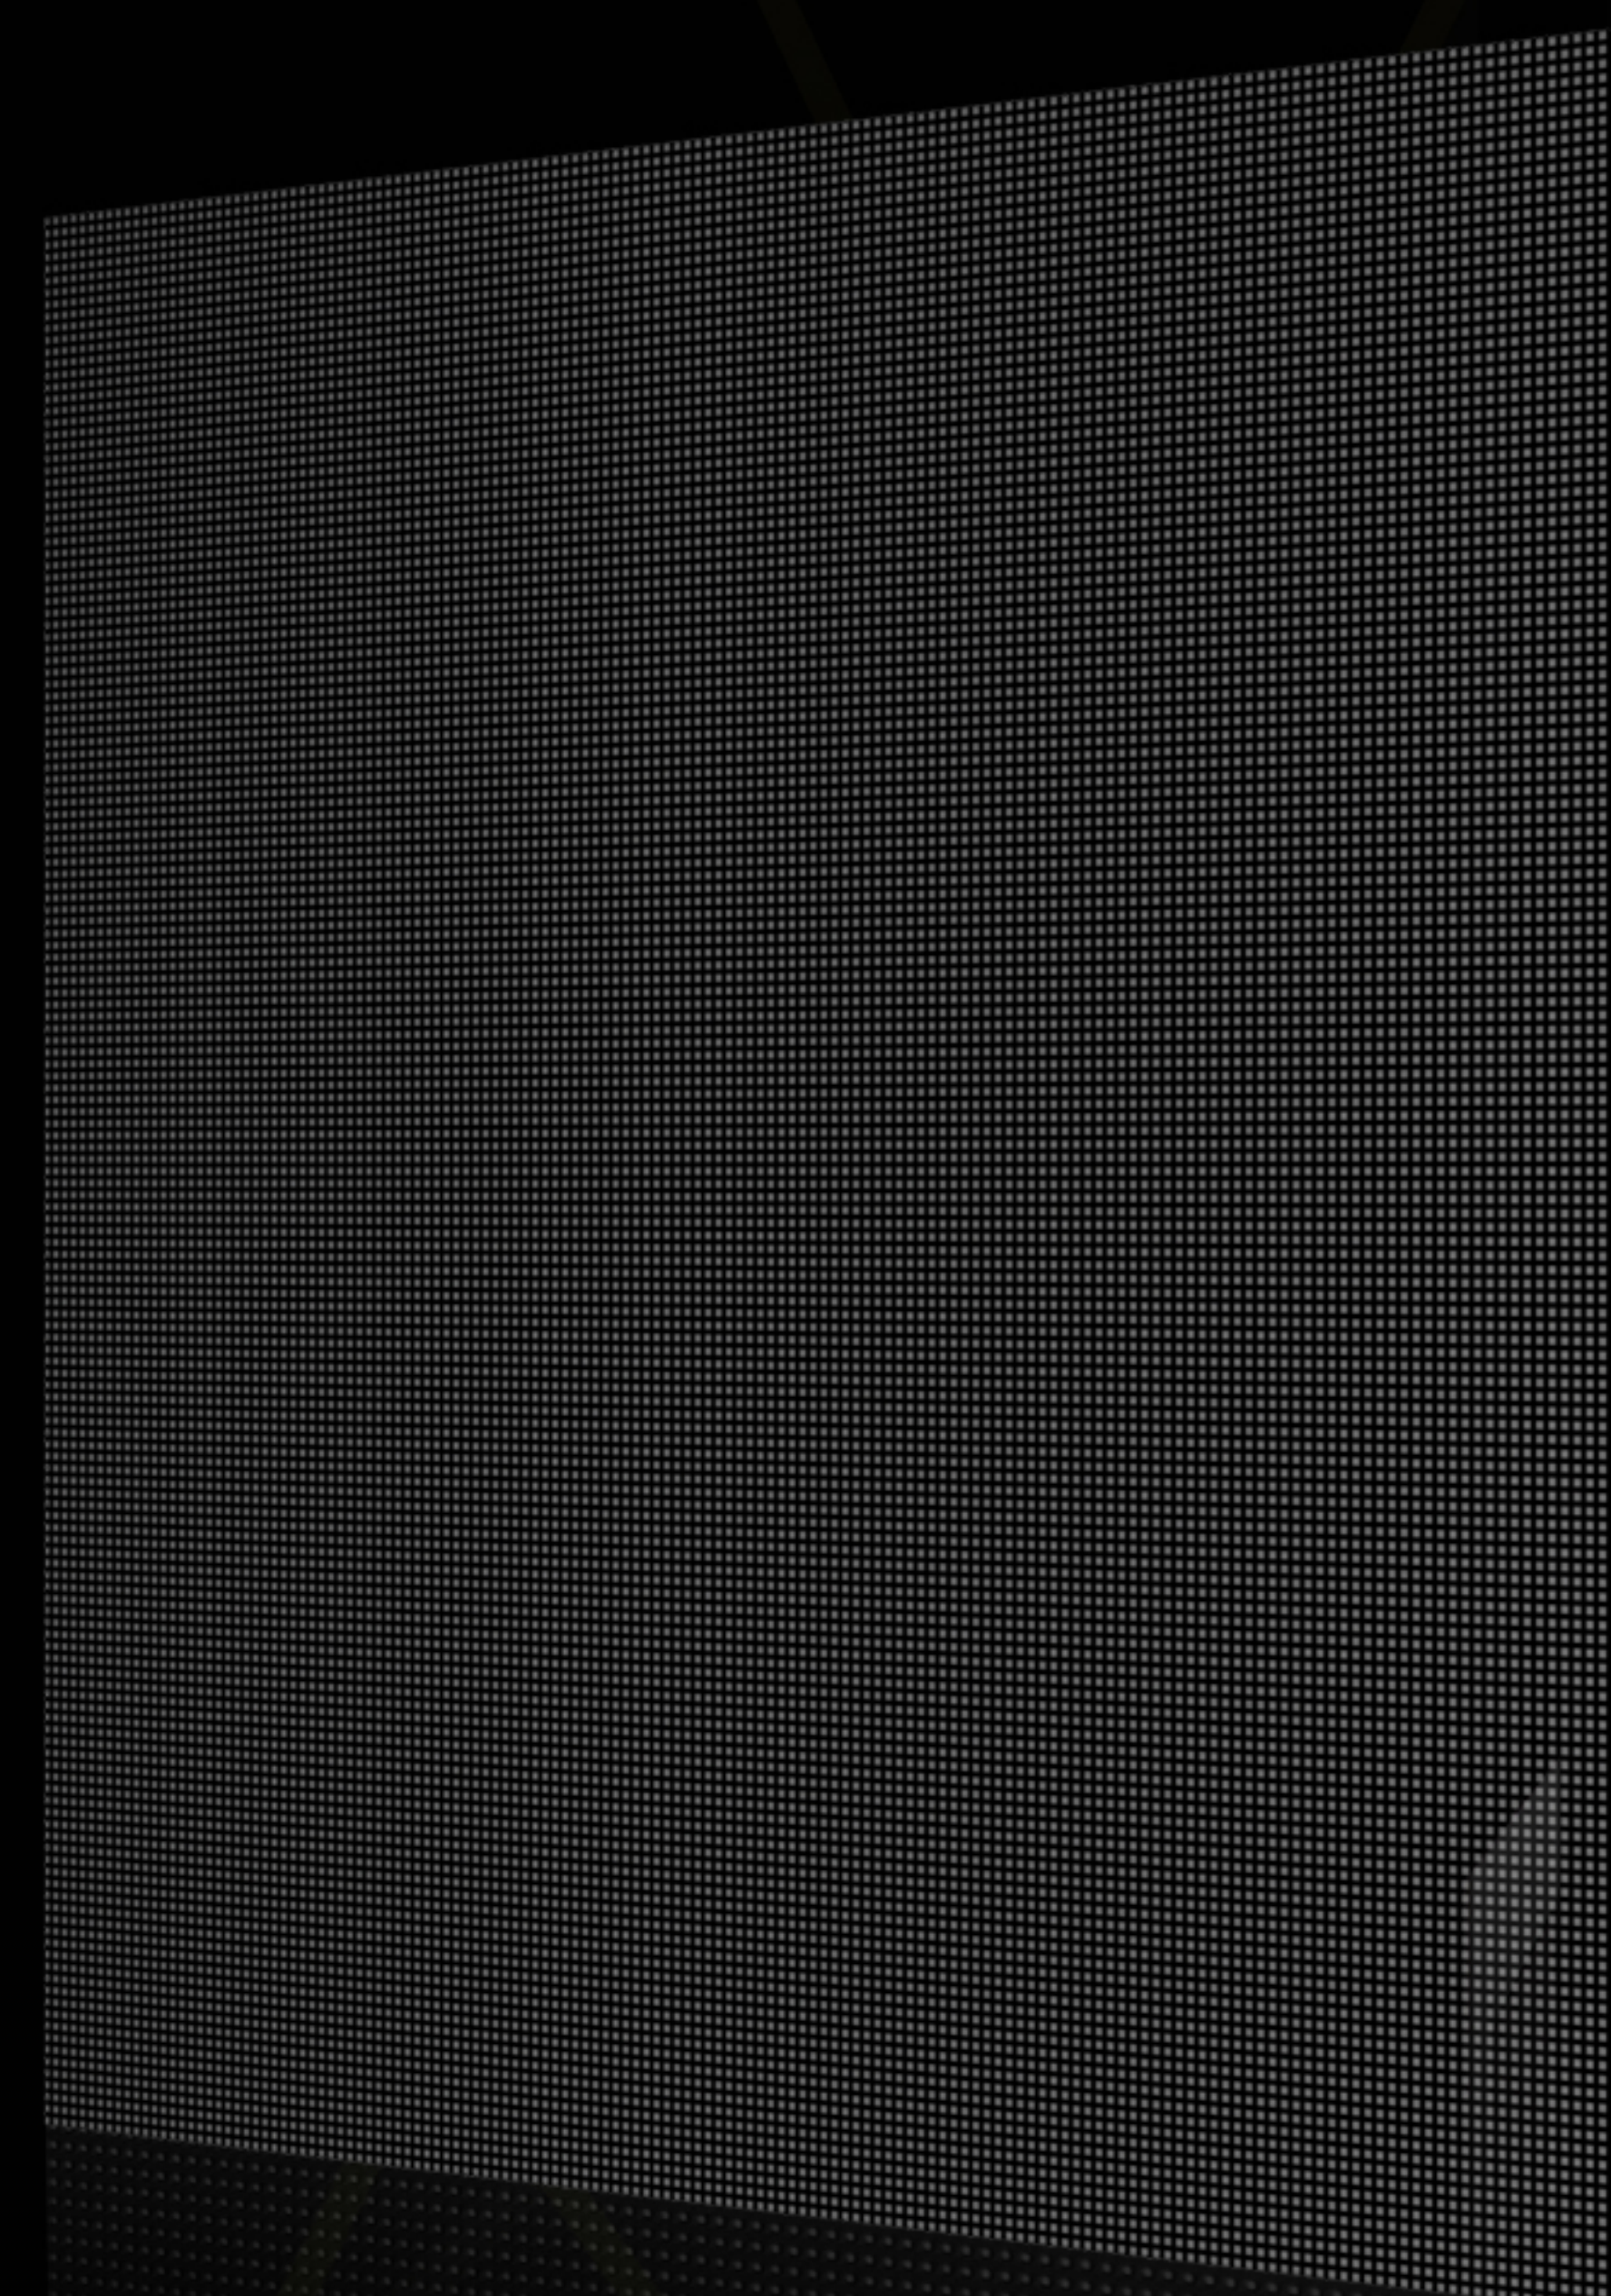

Weight 7.5kg



Enbon



enbon.com



Enbon Led Display



ENBON GROUP
Spirit & Success, **Together**

Thinner Panels Lower Cost

10 in 1 flight case saves more space
and transportation cost



24 panels can be placed horizontally
in a regular 20-foot or 40-foot truck



Enbon




enbon.com




Enbon Led Display


Product **D**etails

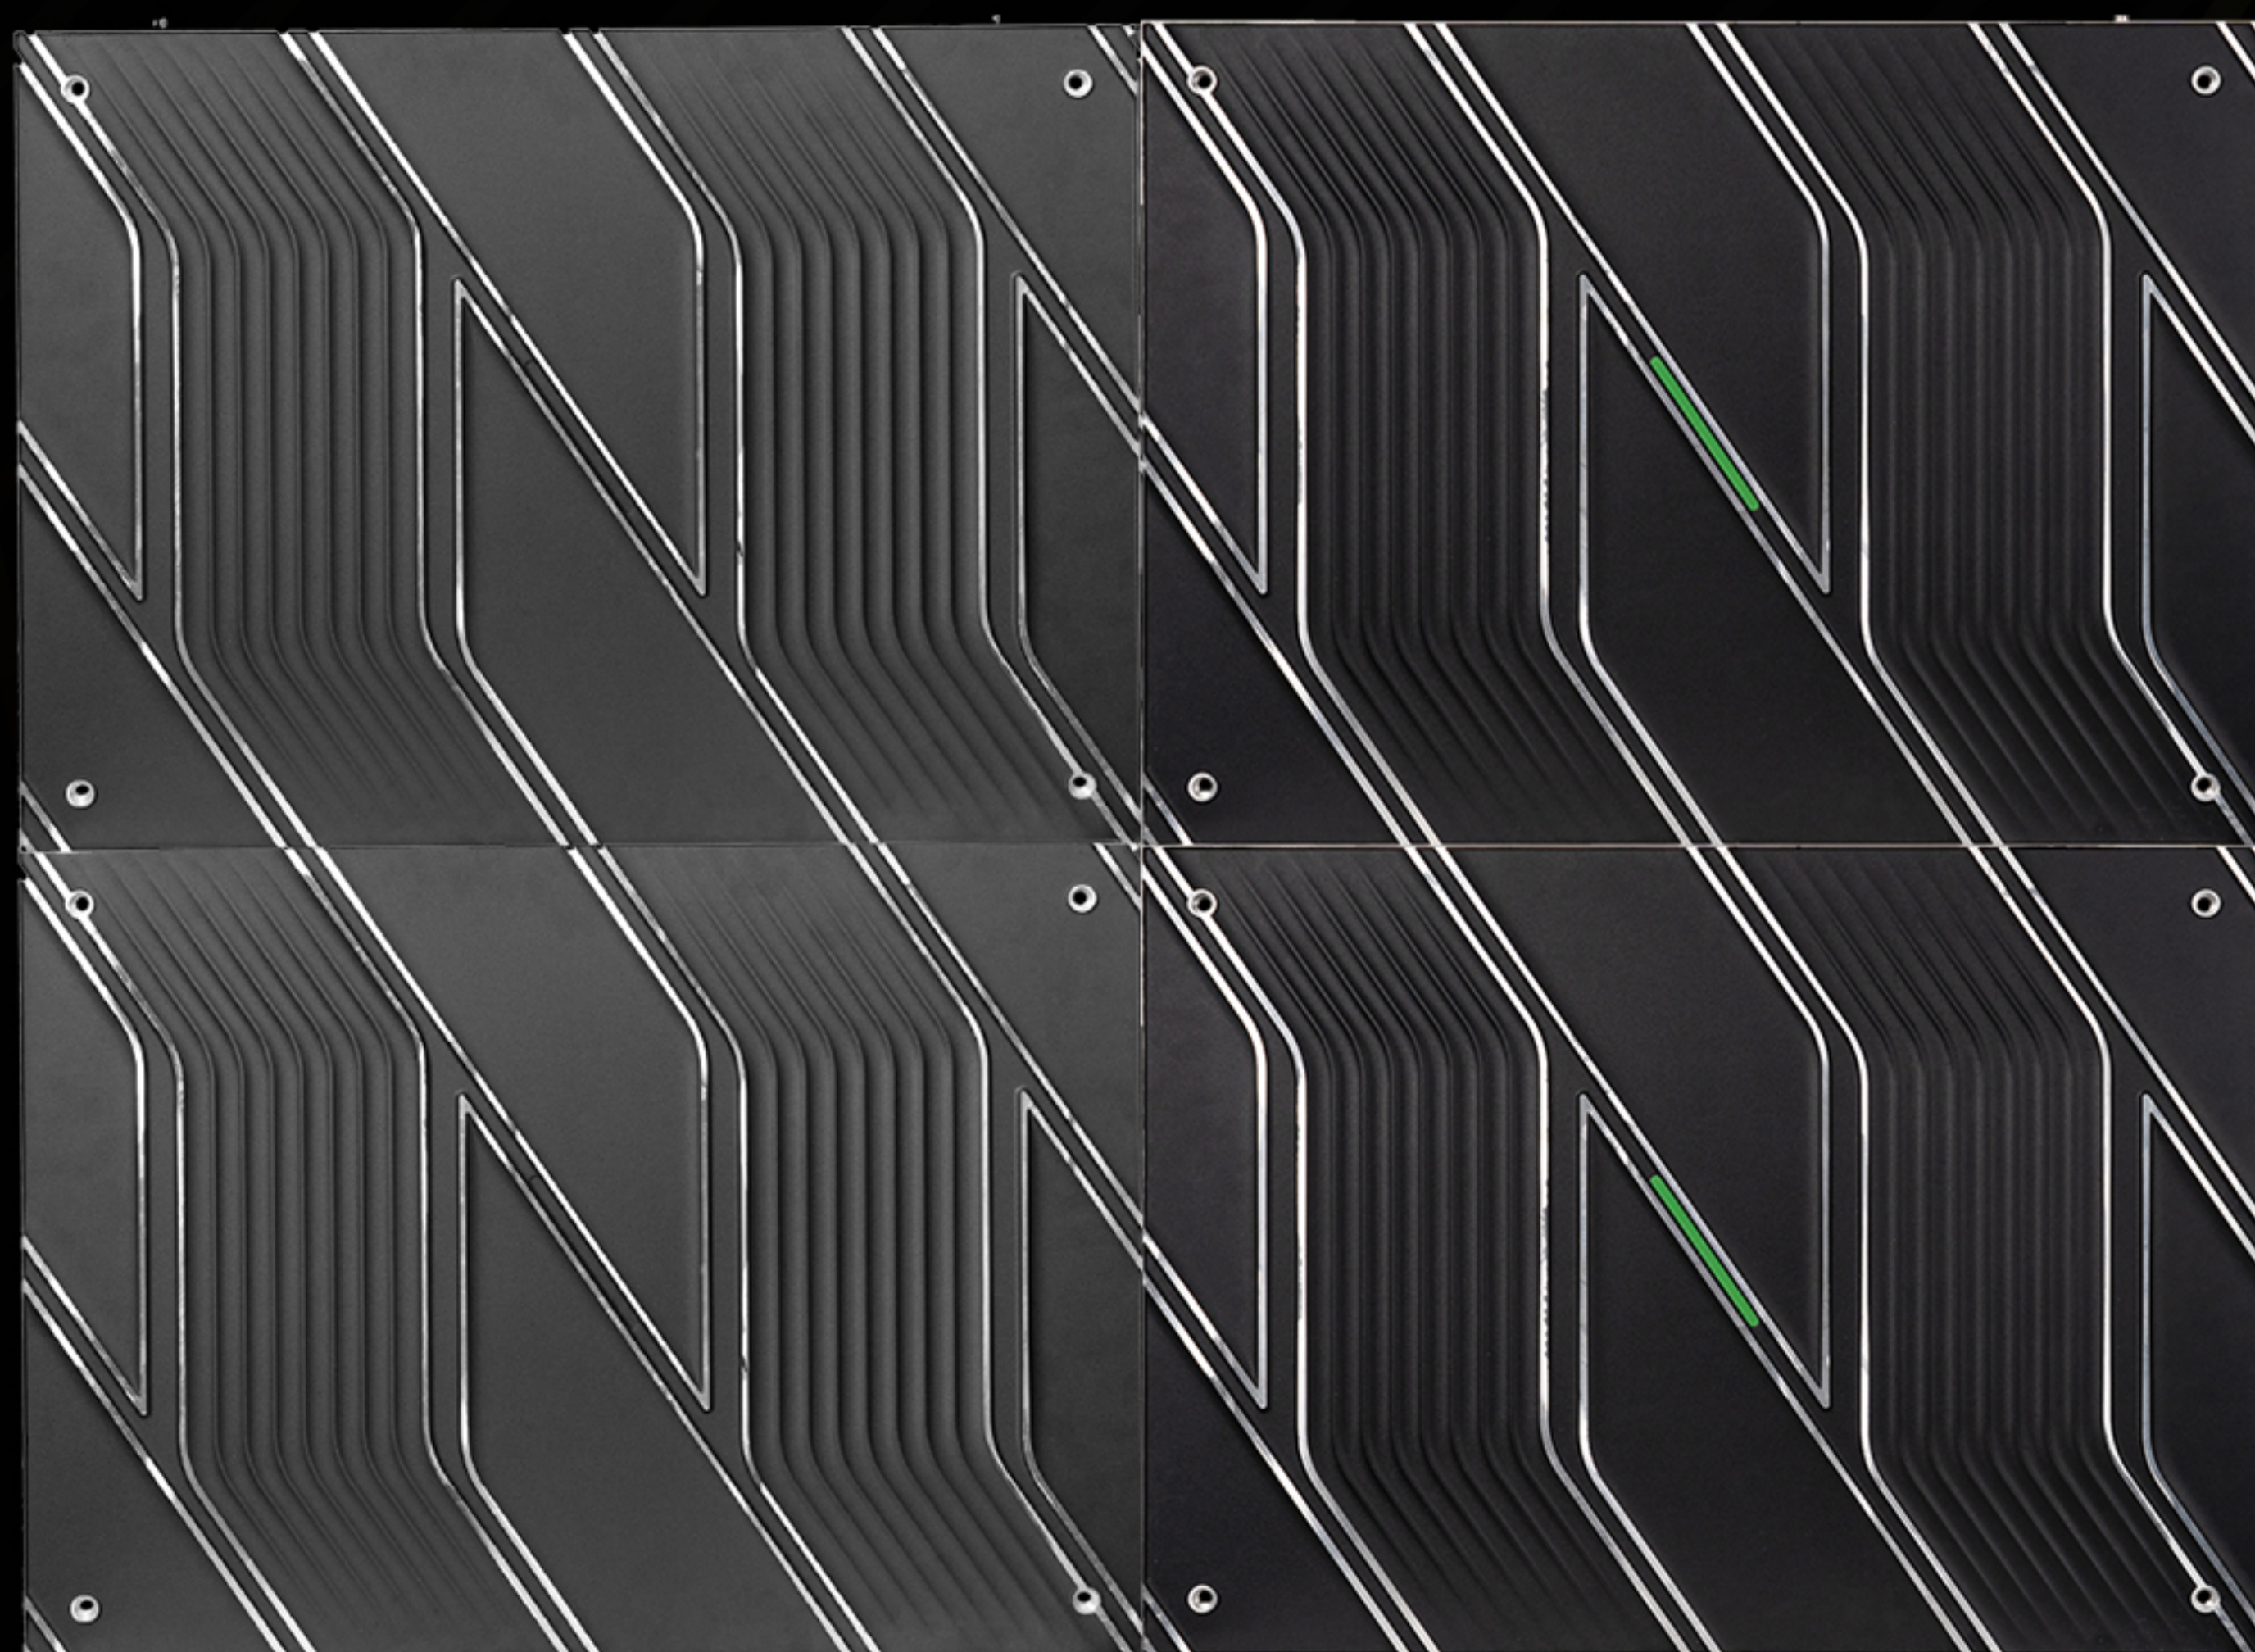

Can Do Seamless Splicing

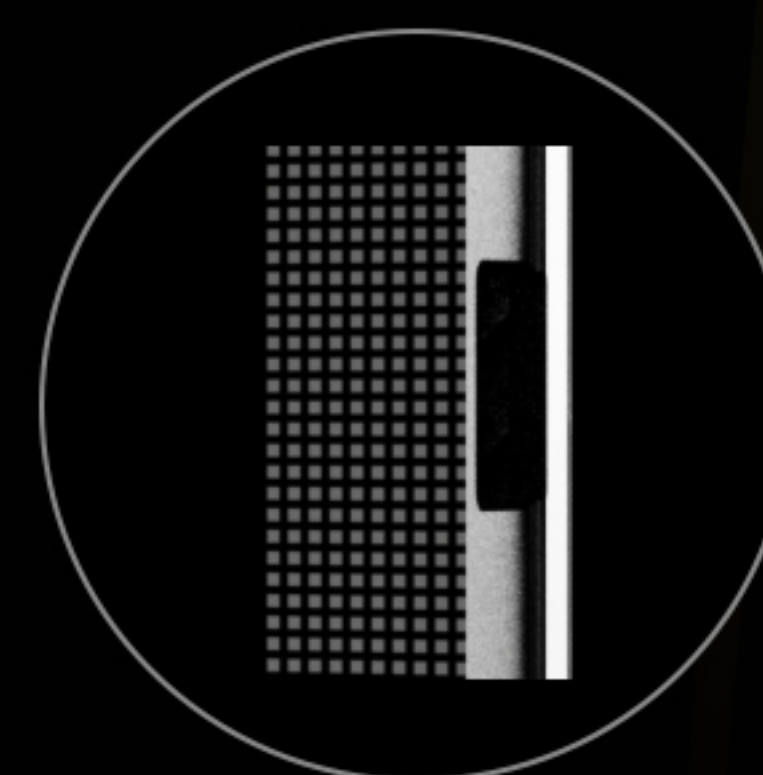


Handles

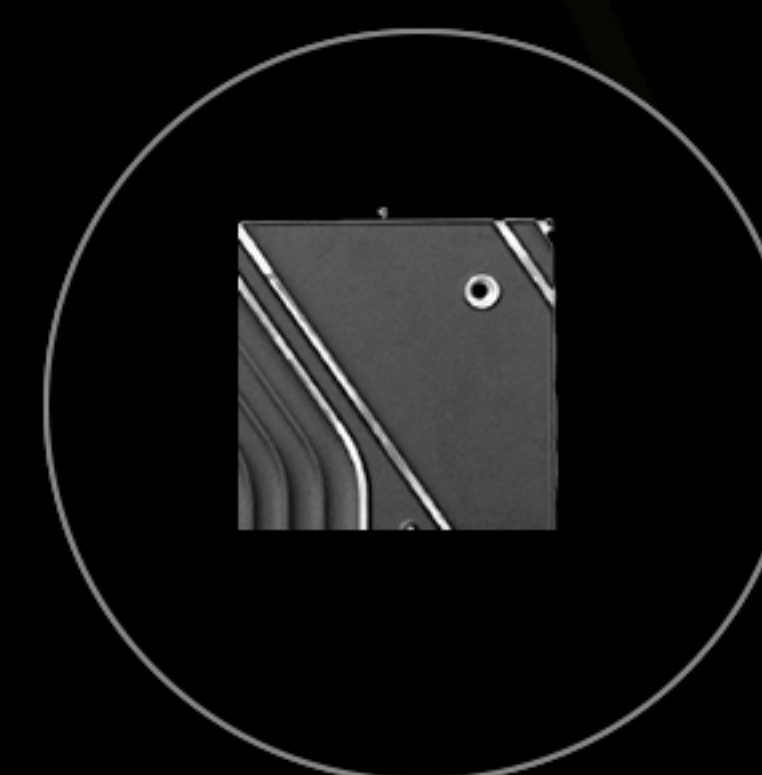

Corner Cover




Power Box

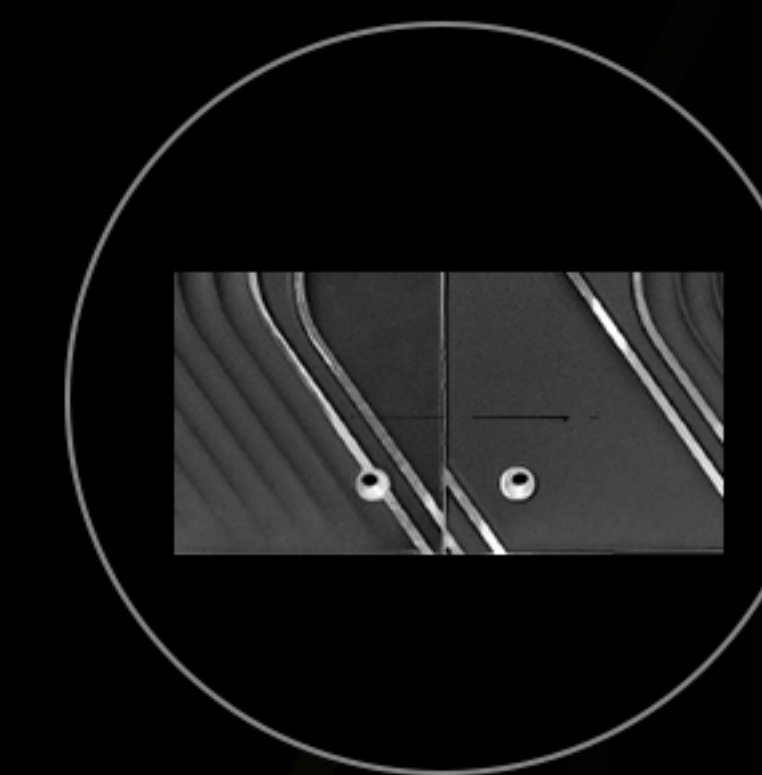


Fast Lock
Between Left and
Right Cabinets

Two Connection Methods

Different connection methods, flexible combination,
suitable for various scenarios

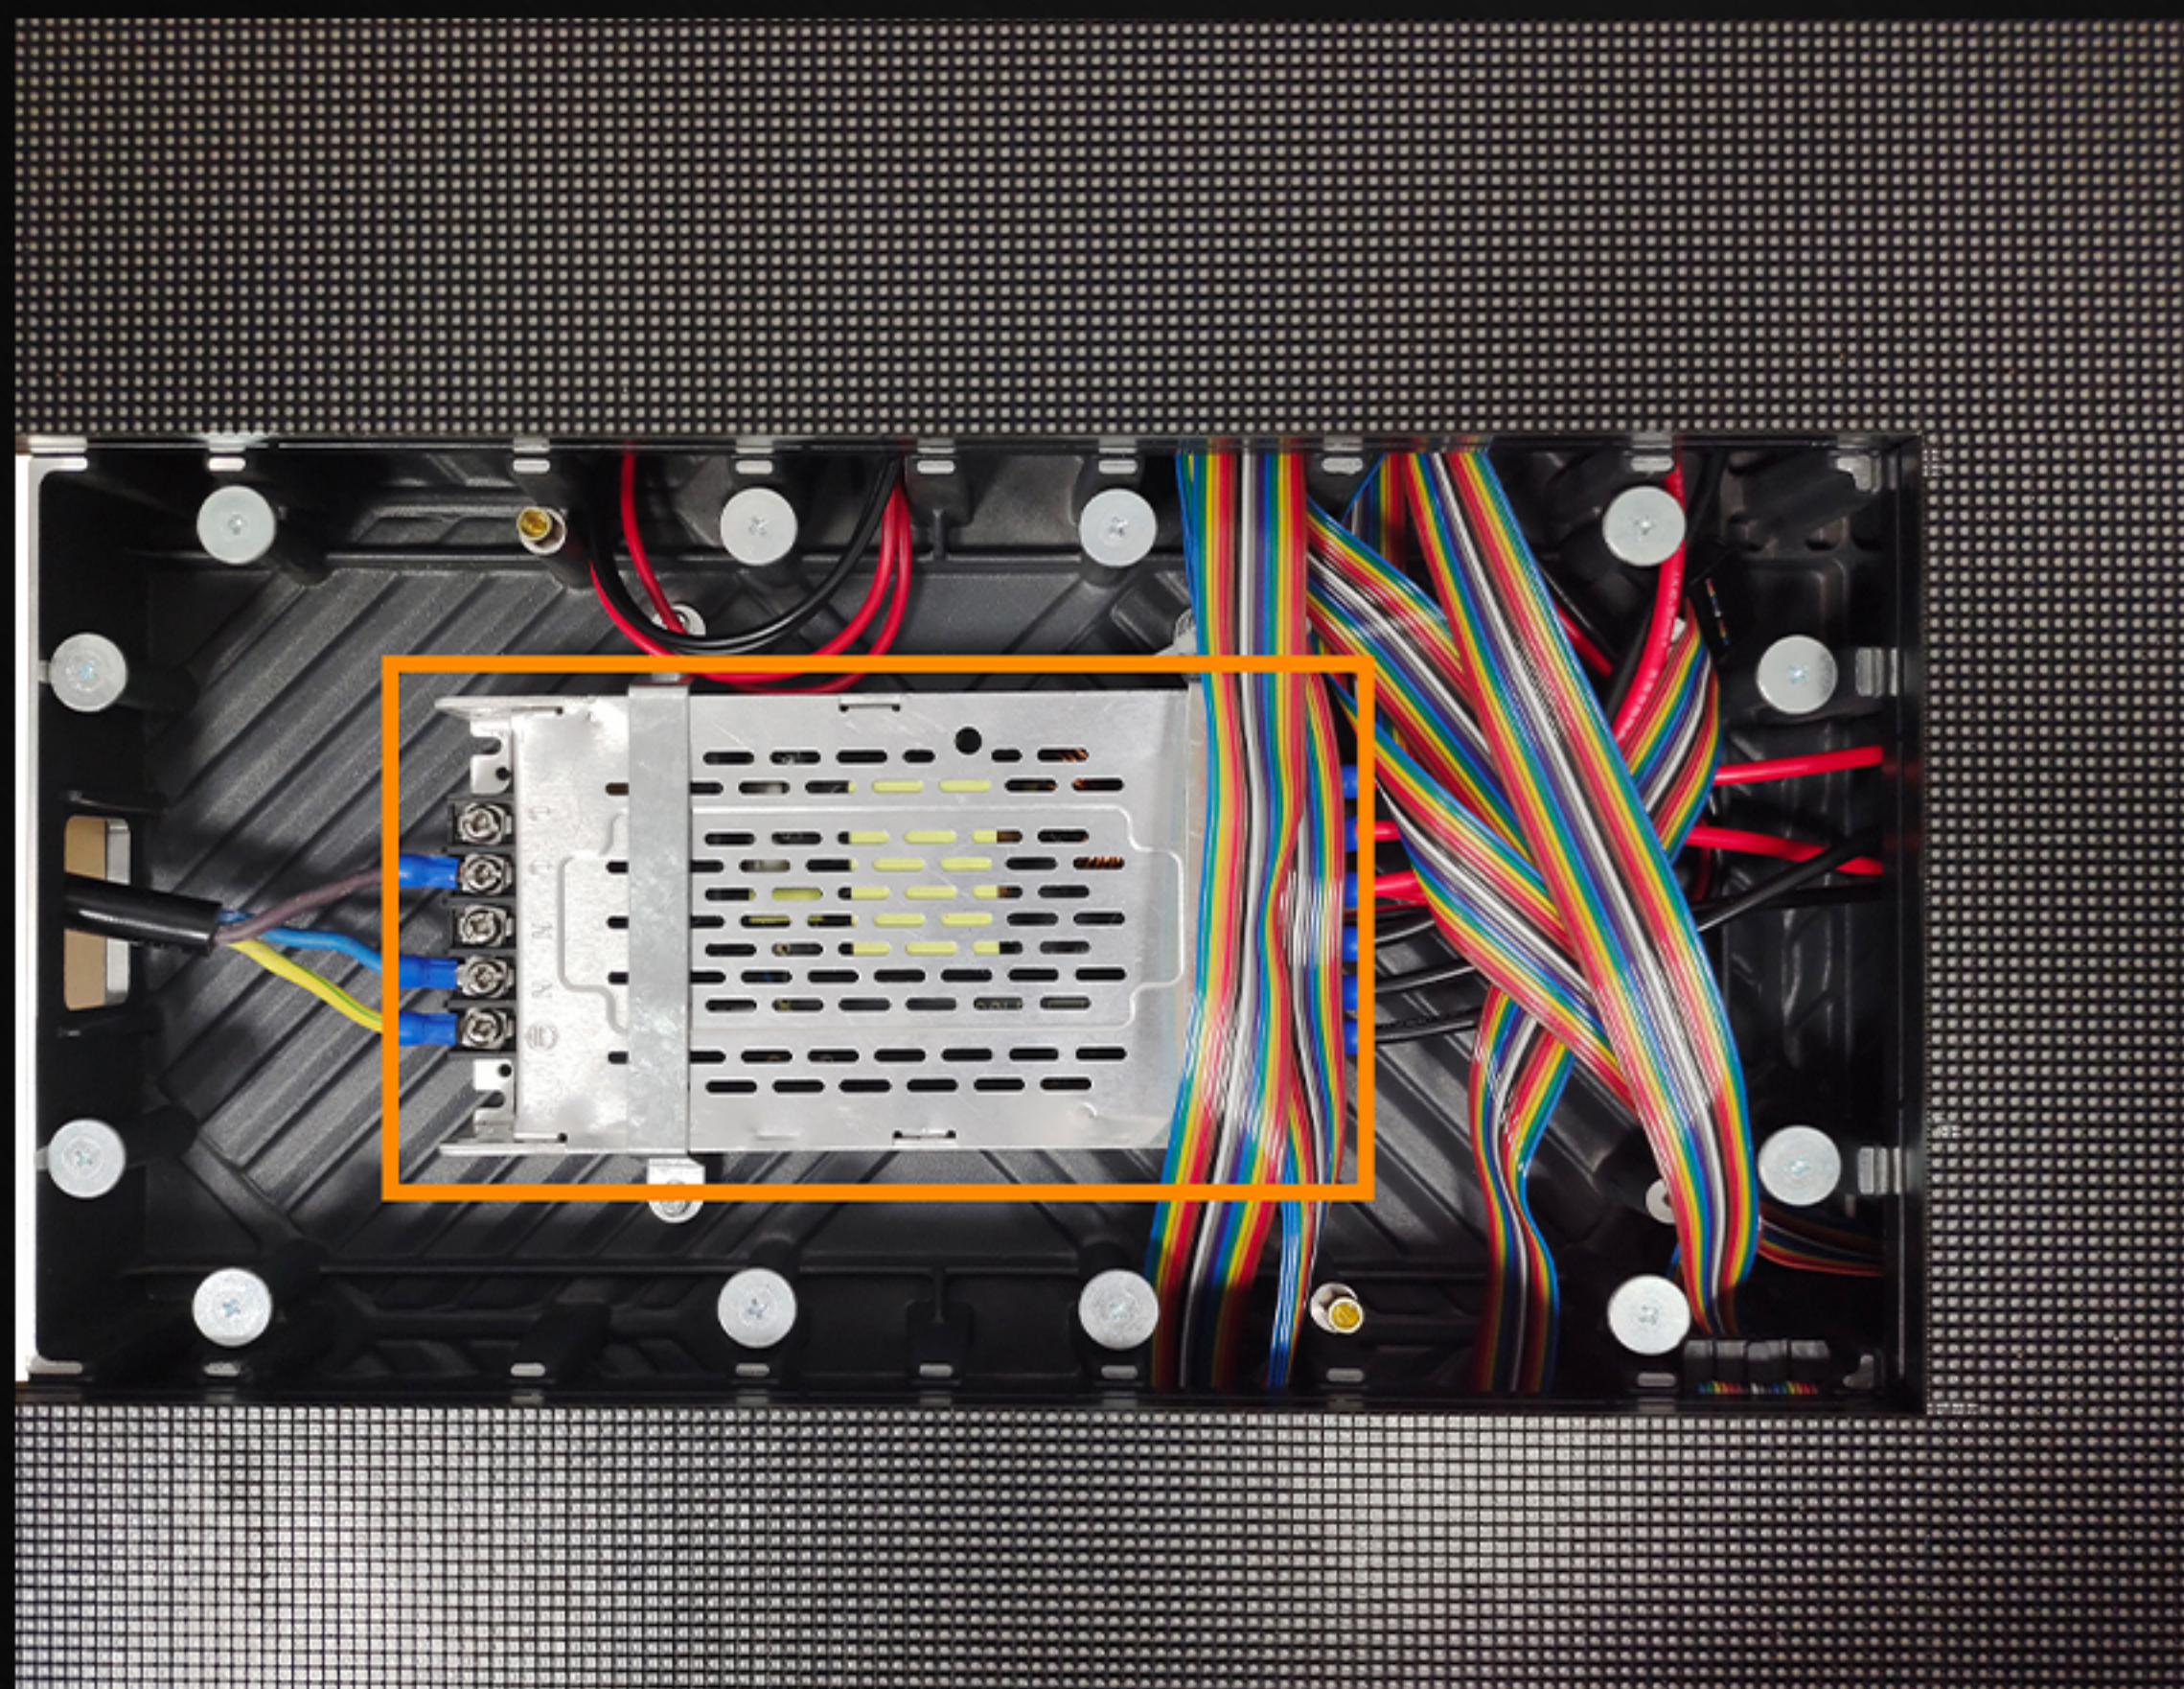

Soft Connection

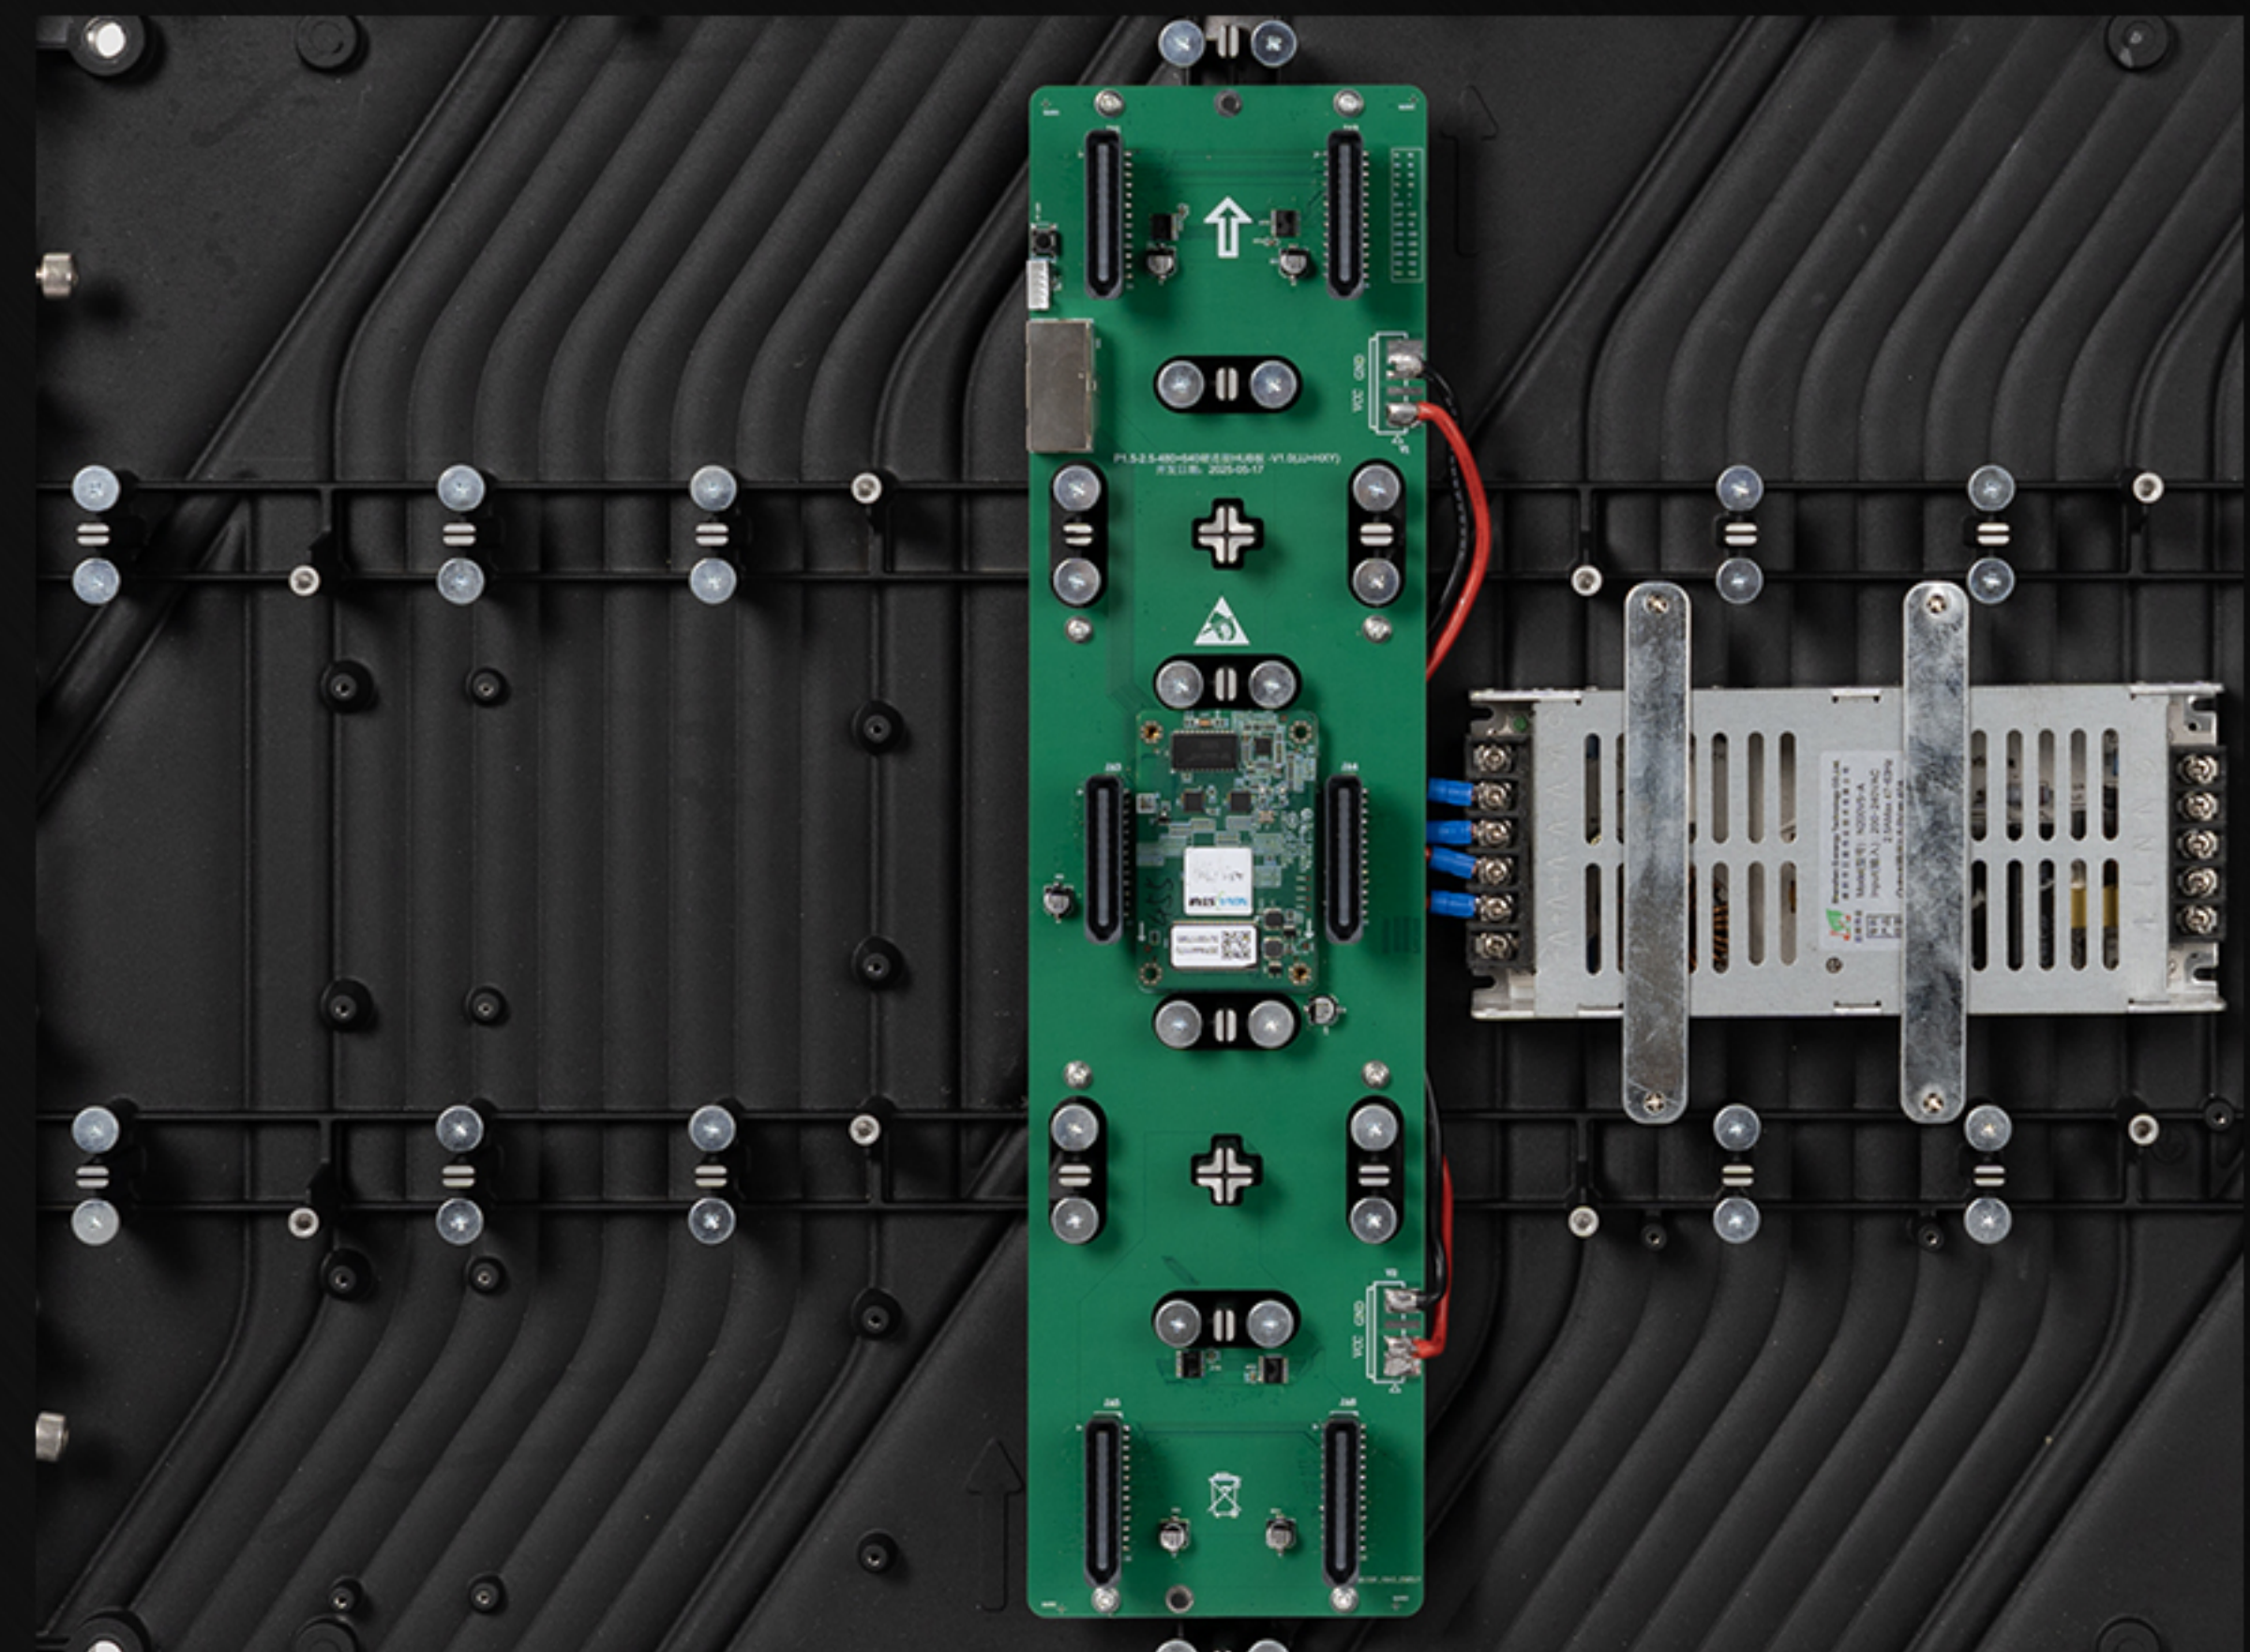

Hard Link

Ultra-thin **A**nd **L**ight



📦 Lightweight Cabinet **7.5kg**

Ⓐ **Aluminum** Module and Cabinet



Enbon



enbon.com



Enbon Led Display



ENBON GROUP
Spirit & Success, **Together**

Local **D**etails



Enbon



enbon.com




Enbon Led Display



ENBON GROUP
Spirit & Success, **Together**

Screw **H**oles for Back **F**rame **F**ixation

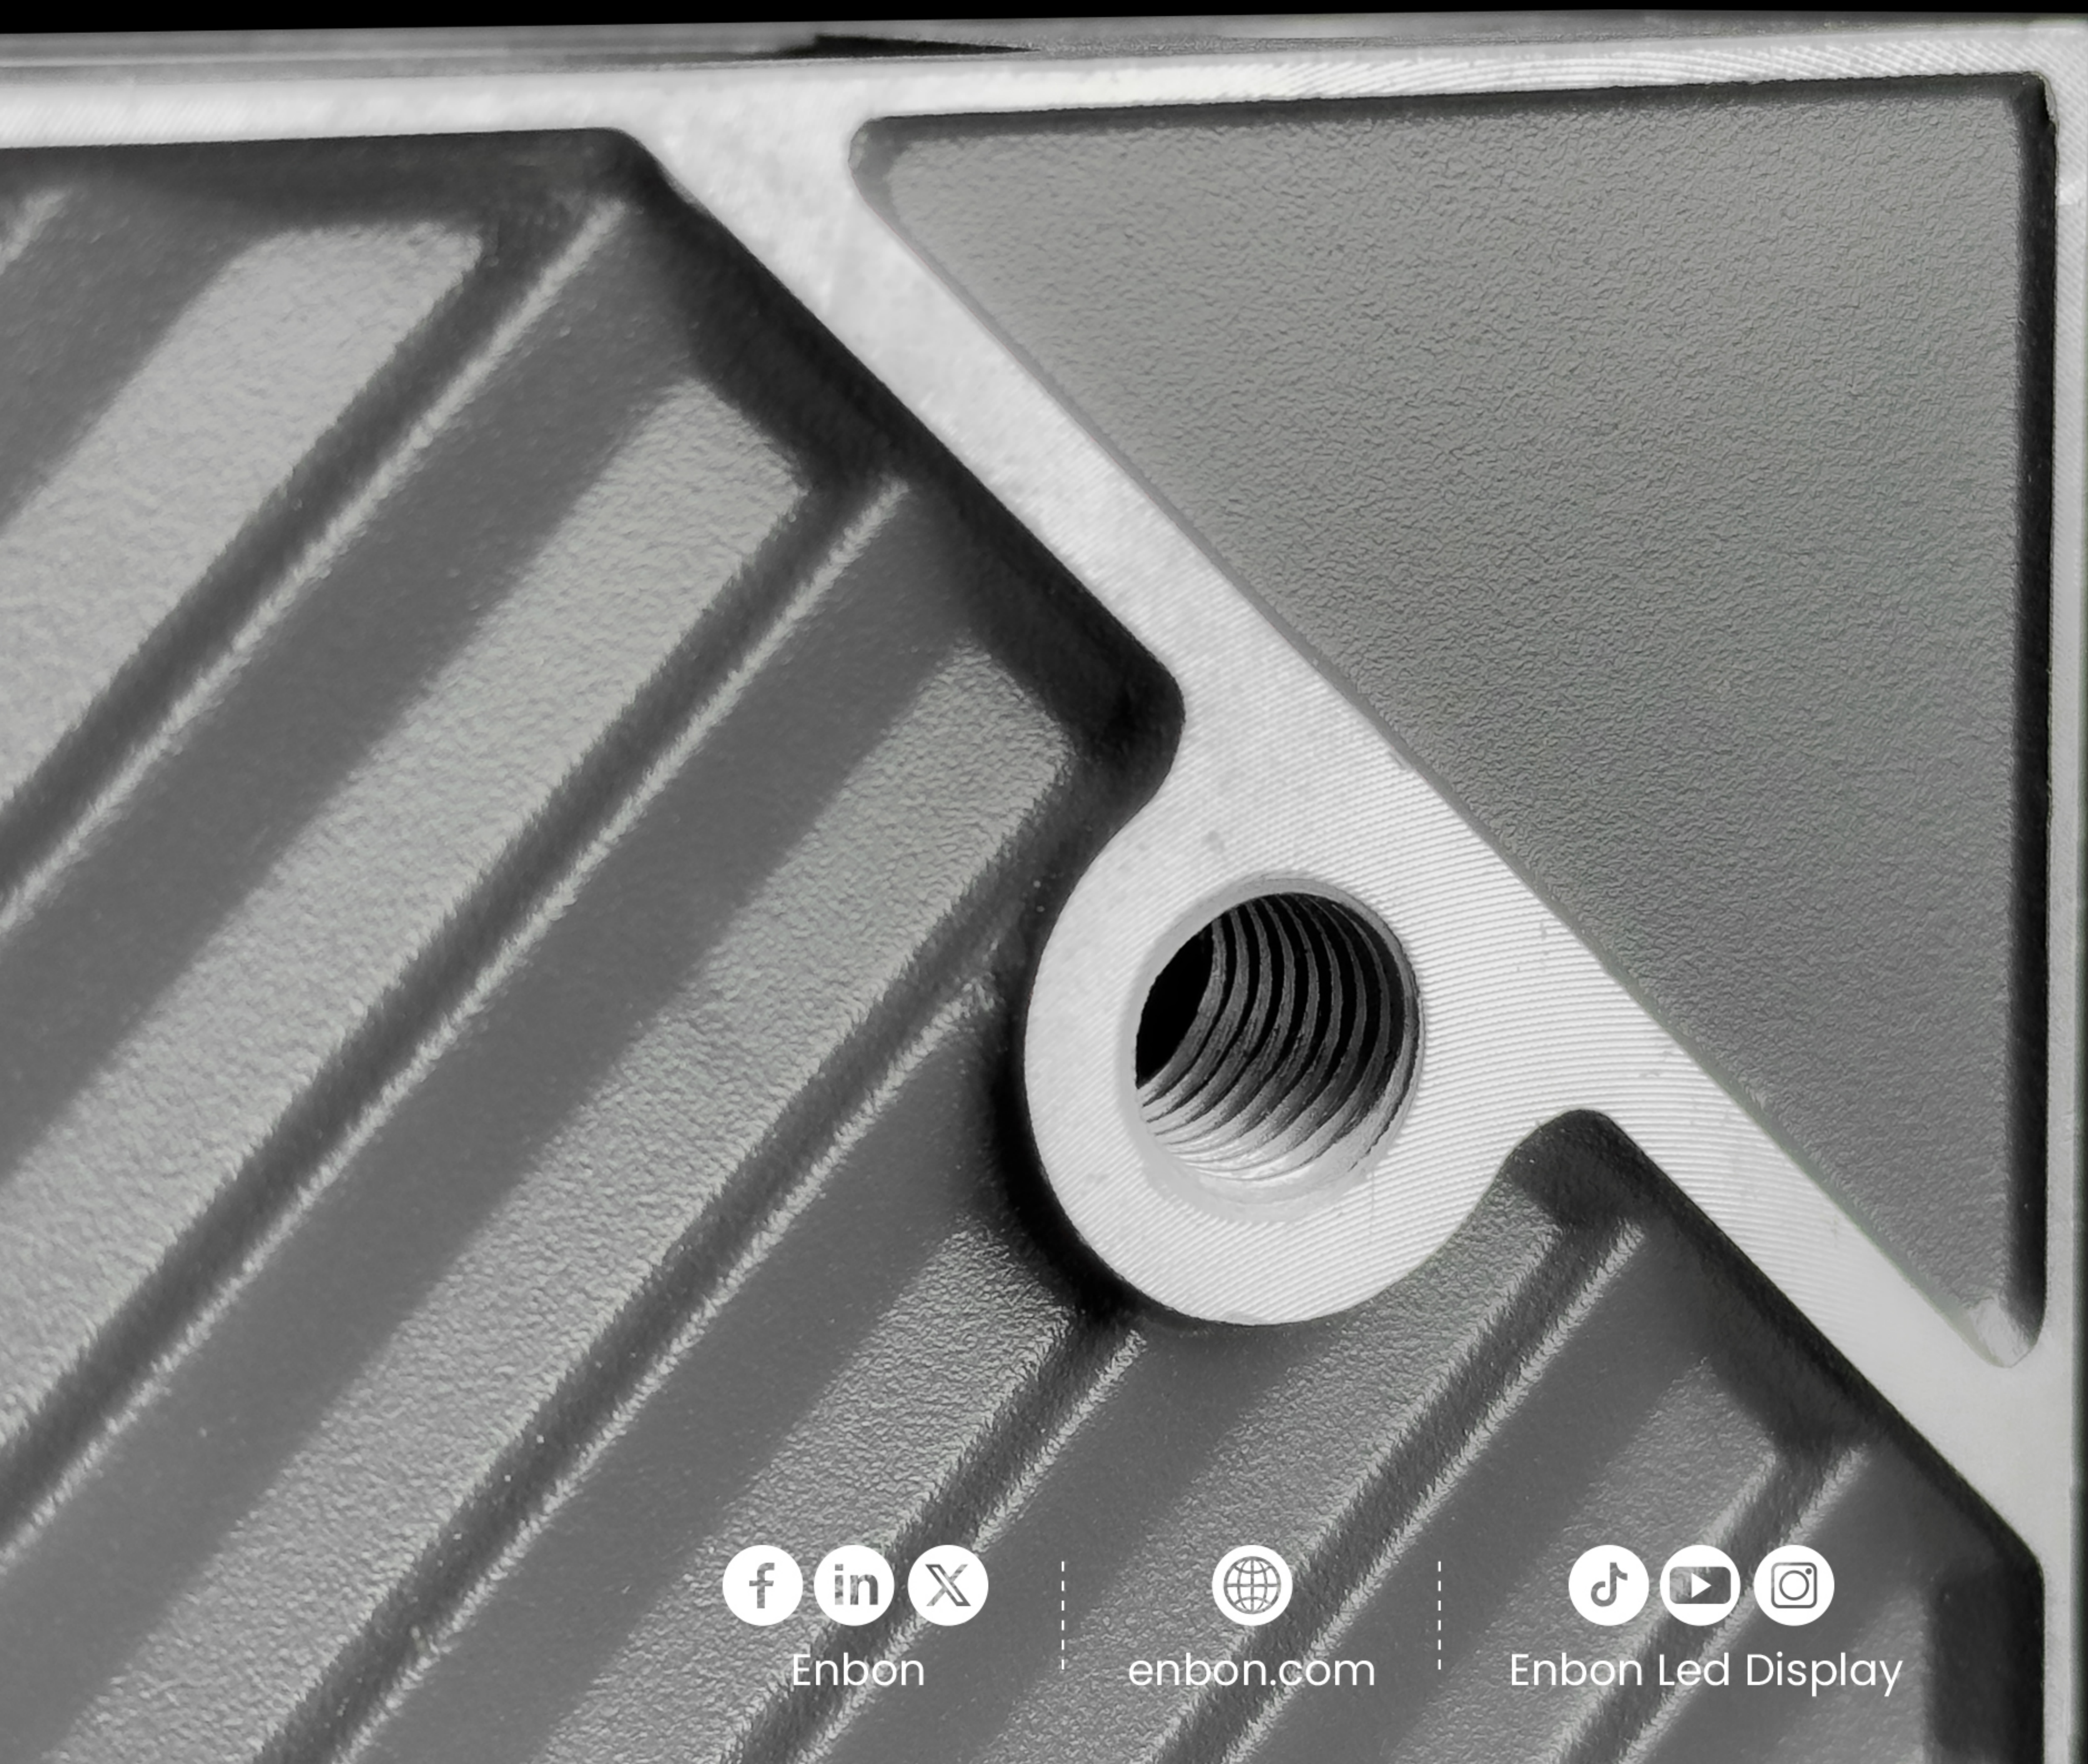

Enbon



enbon.com



Enbon Led Display



ENBON GROUP
Spirit & Success, **Together**

Up-and-Down Positioning Column



Enbon



enbon.com




Enbon Led Display



ENBON GROUP
Spirit & Success, **Together**

Internal **O**rientation Indication of the **C**abinet

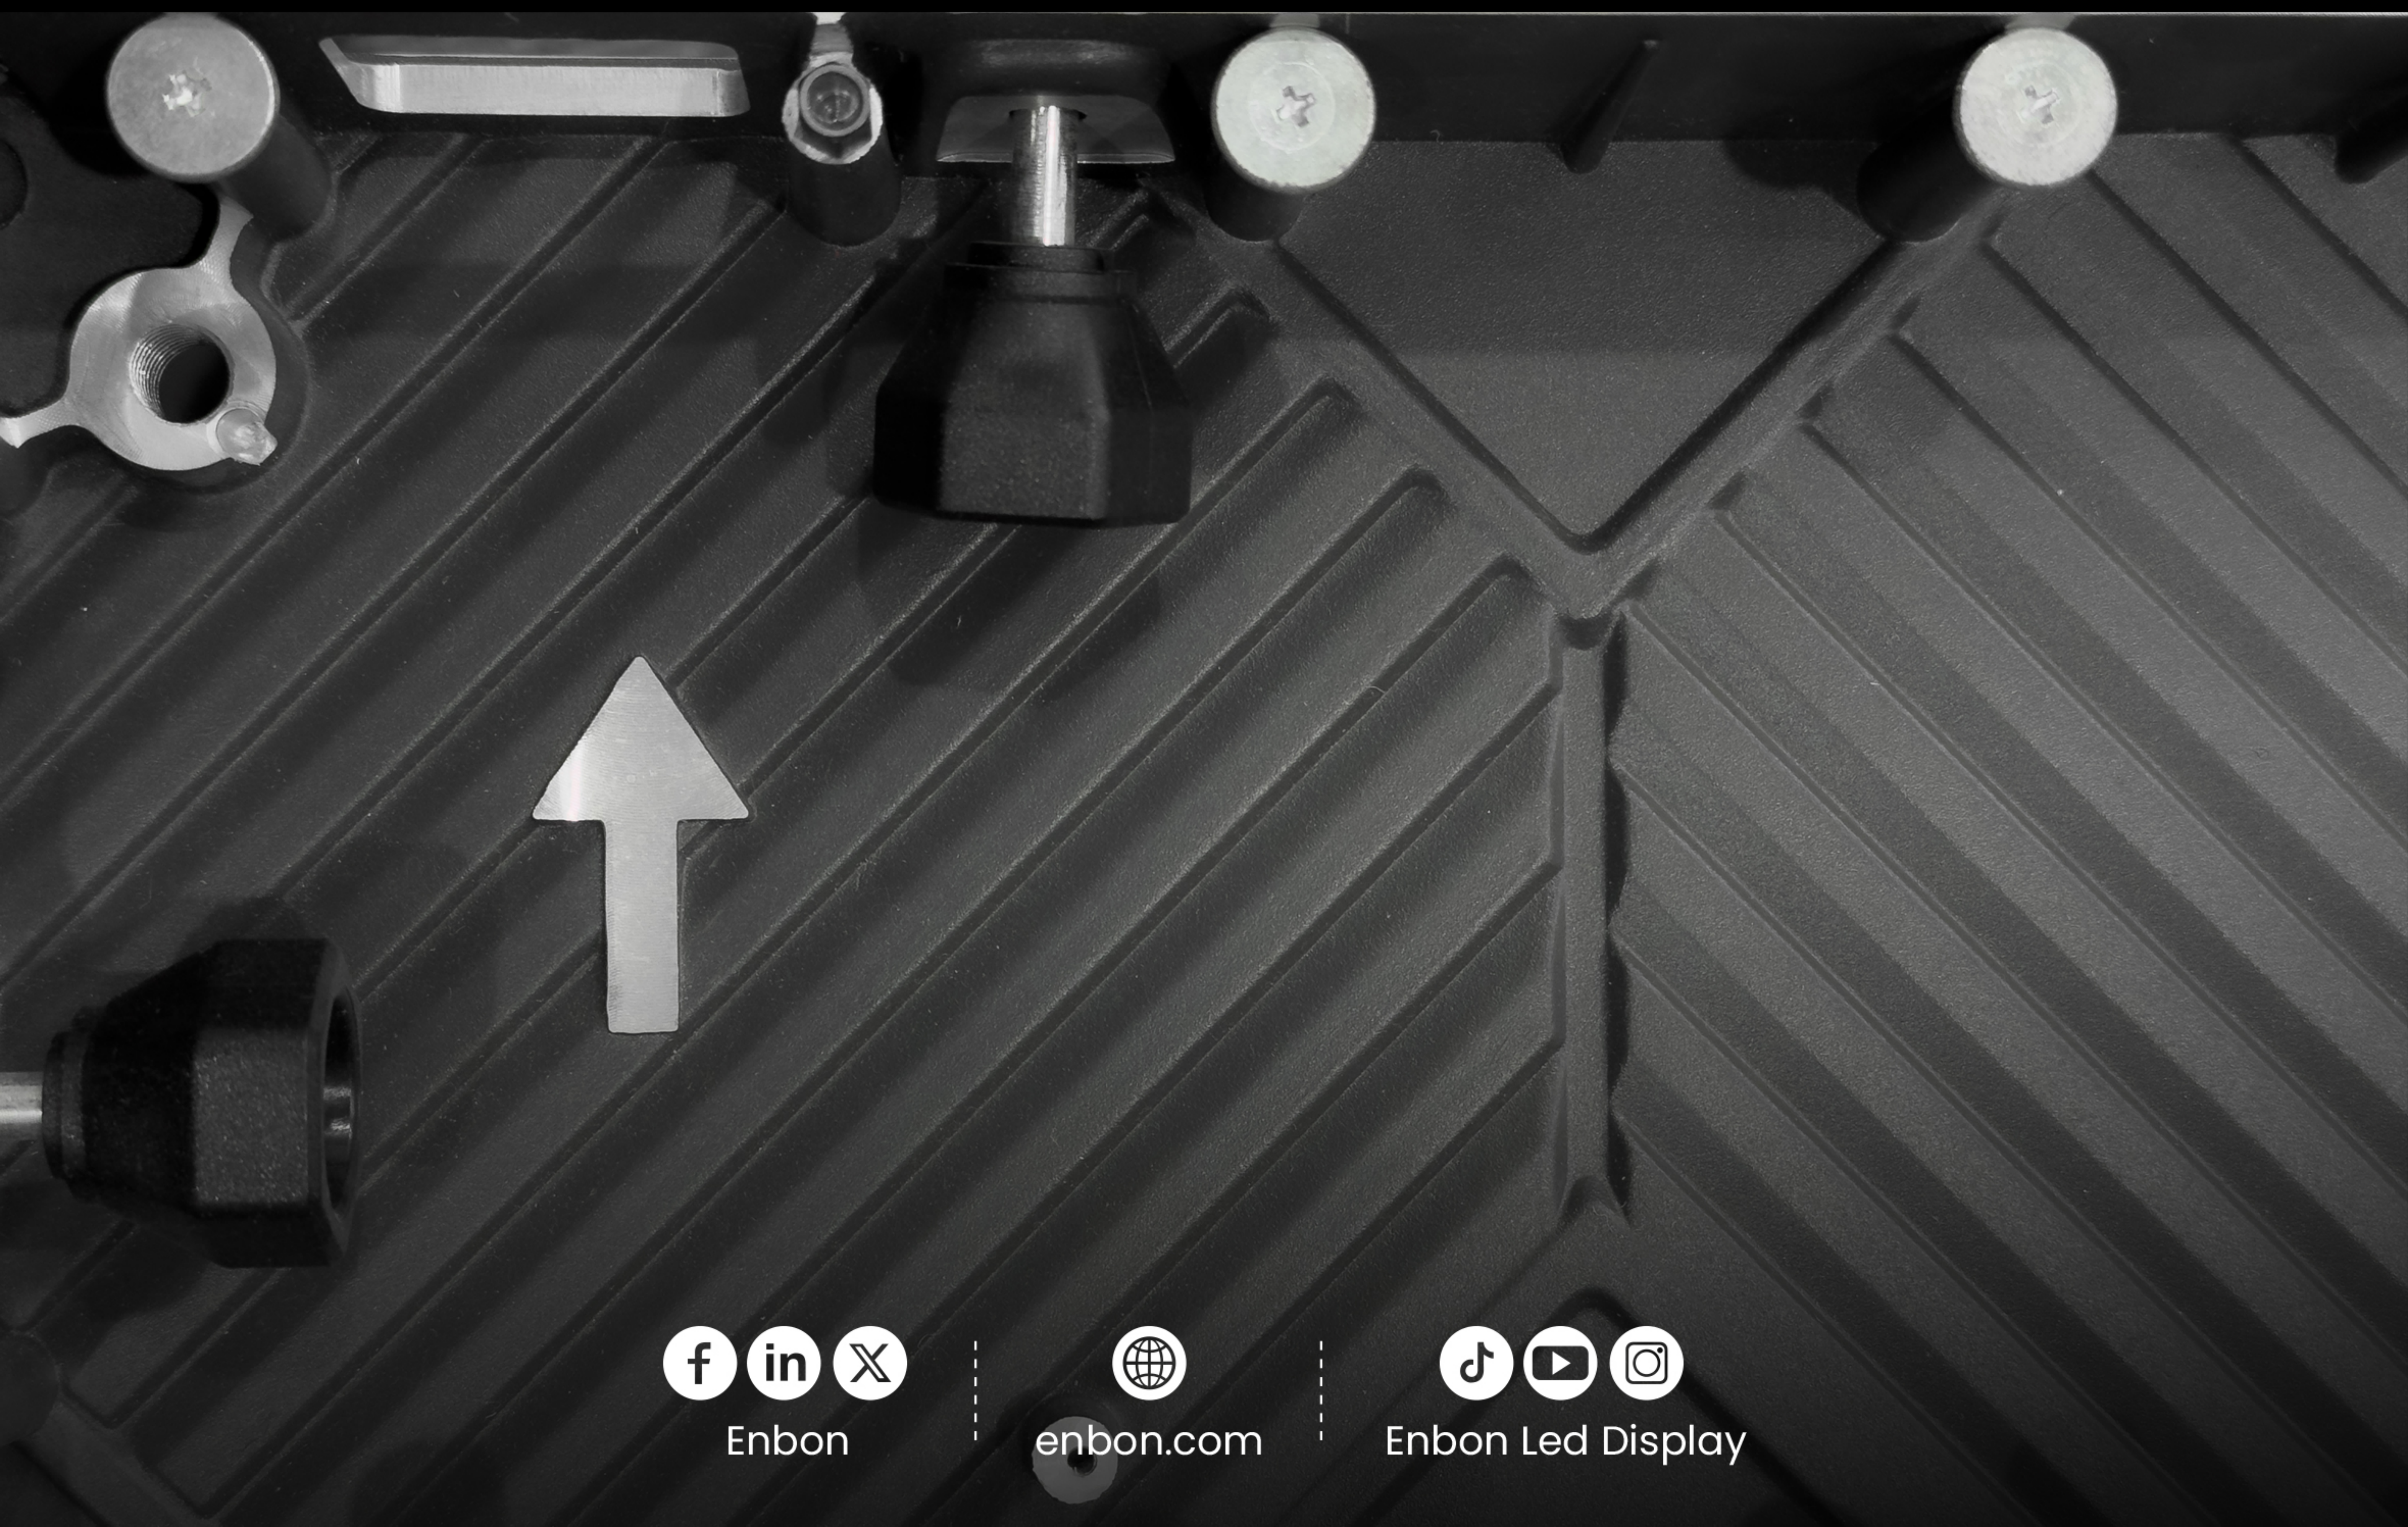

Enbon



enbon.com




Enbon Led Display



ENBON GROUP
Spirit & Success, **Together**

Left and **R**ight **S**crew **L**ock

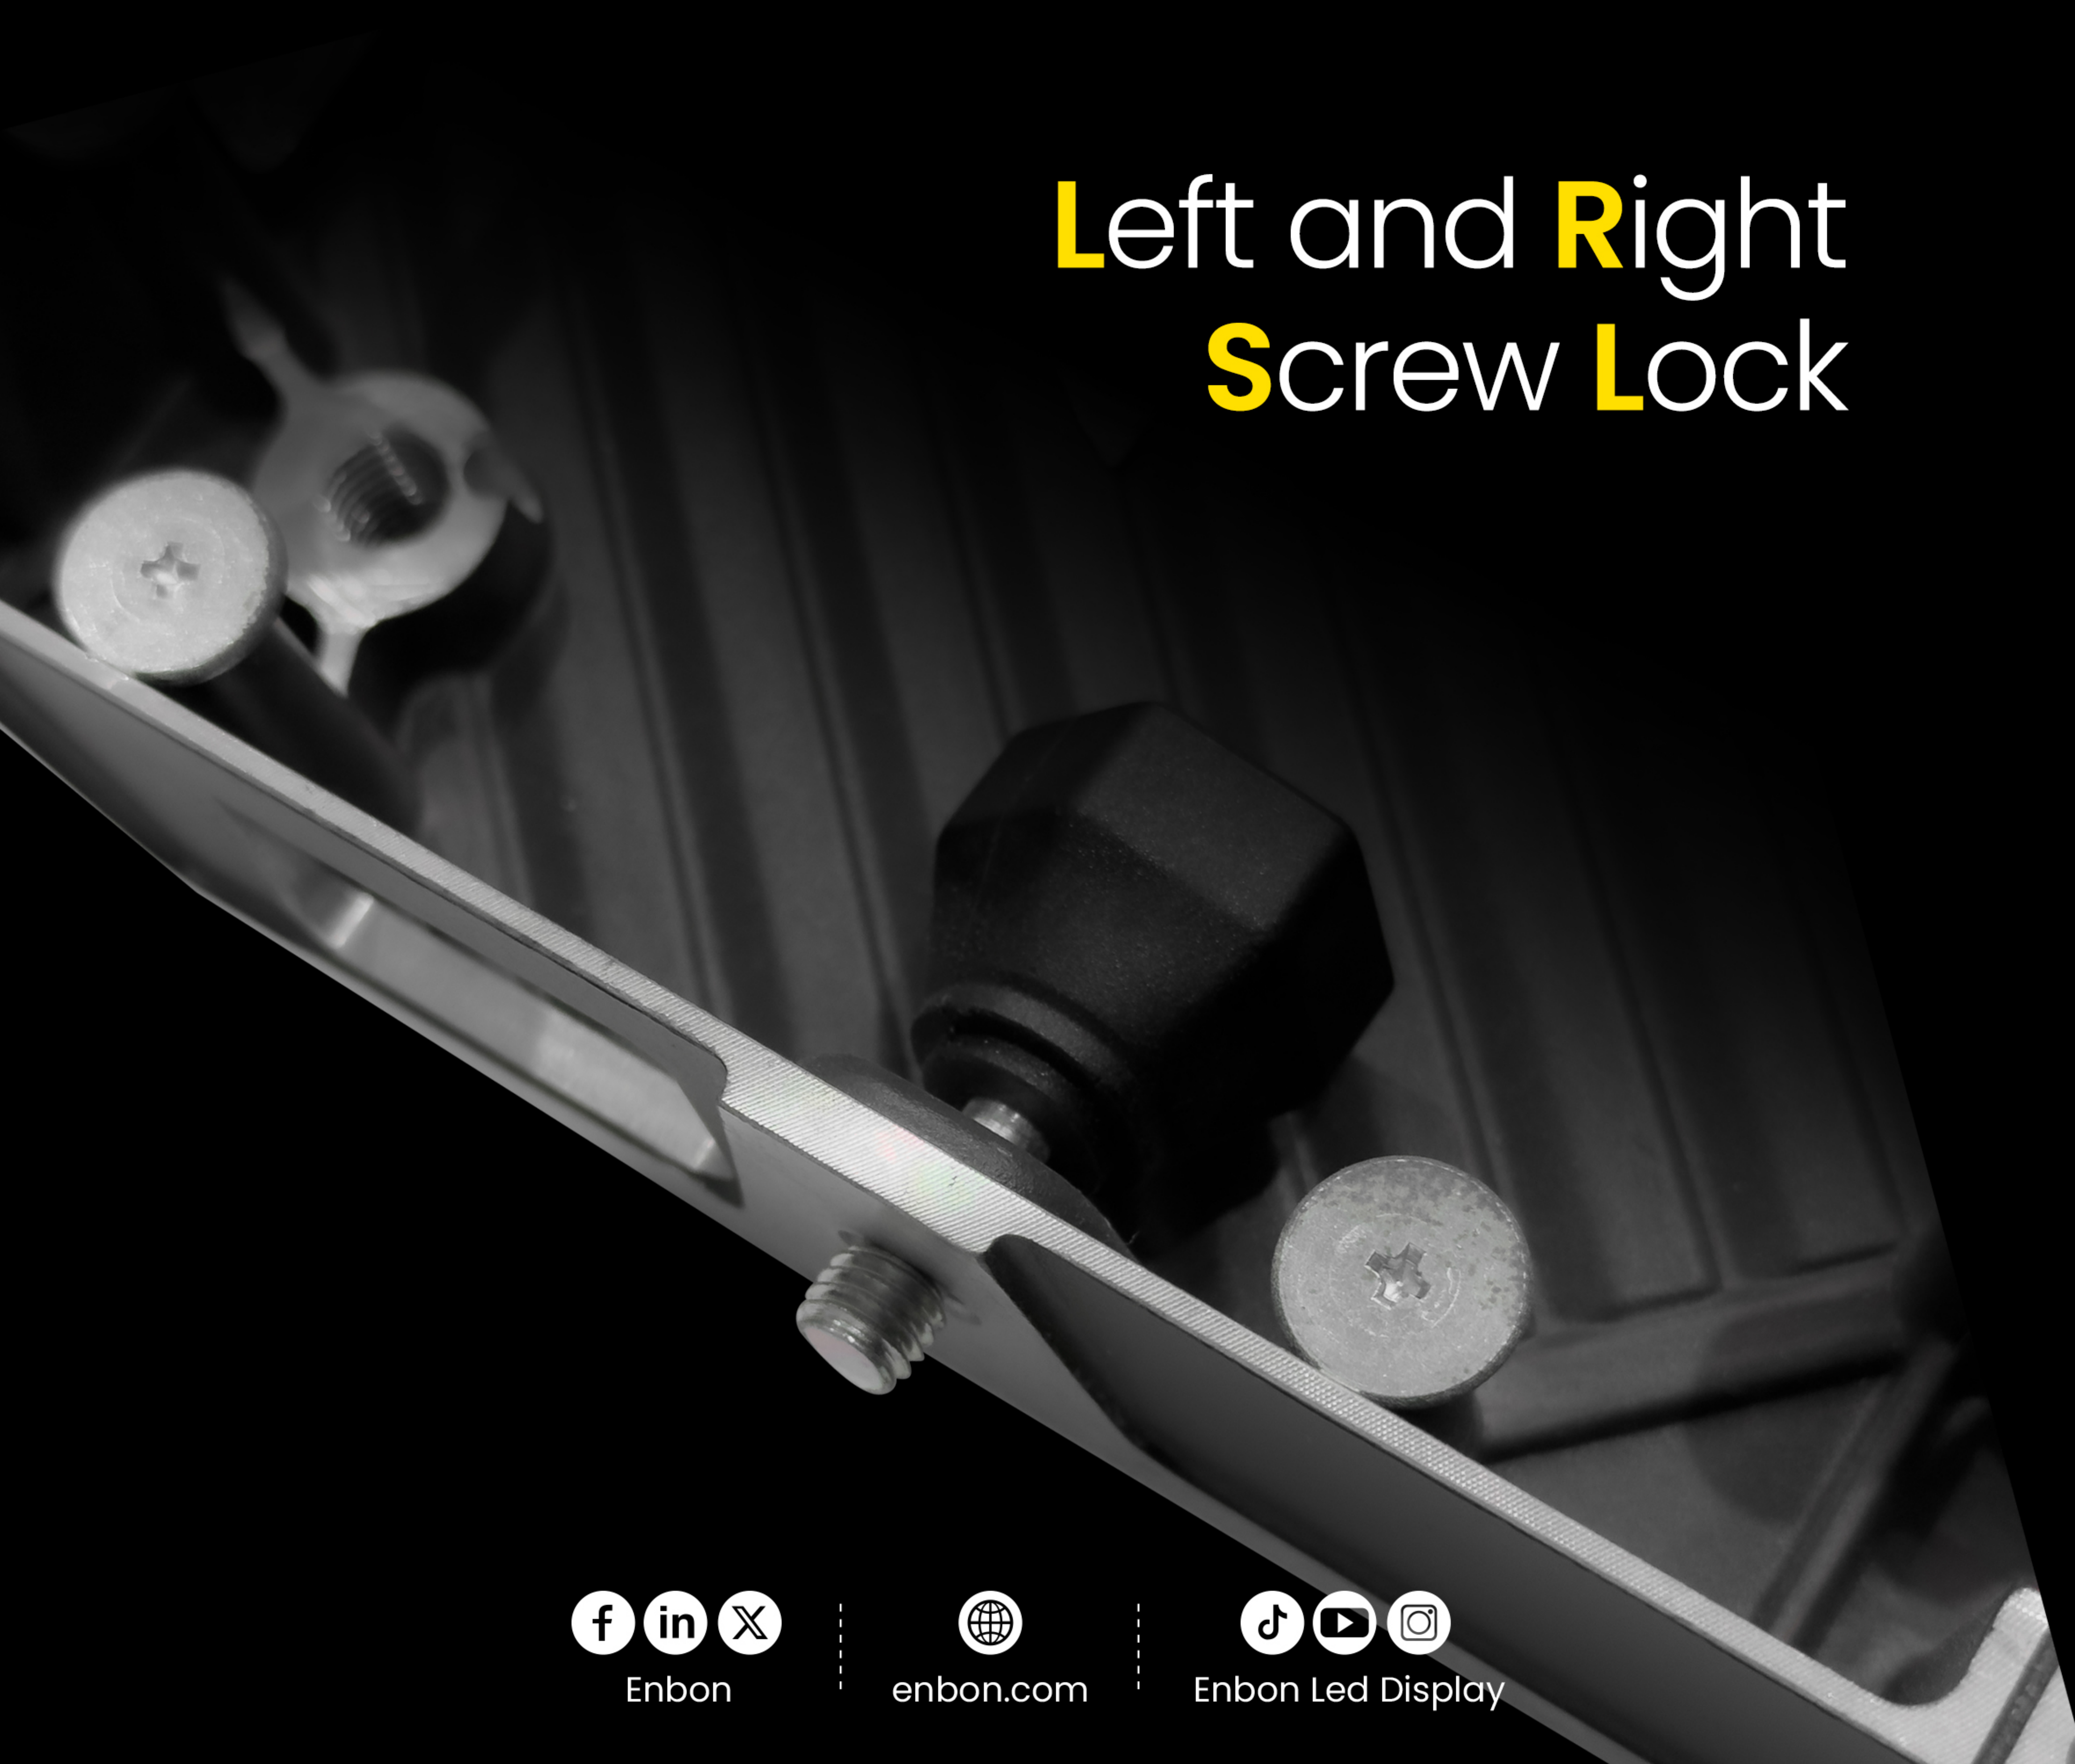

Enbon




enbon.com



Enbon Led Display

High Refresh Rate

High Grayscale

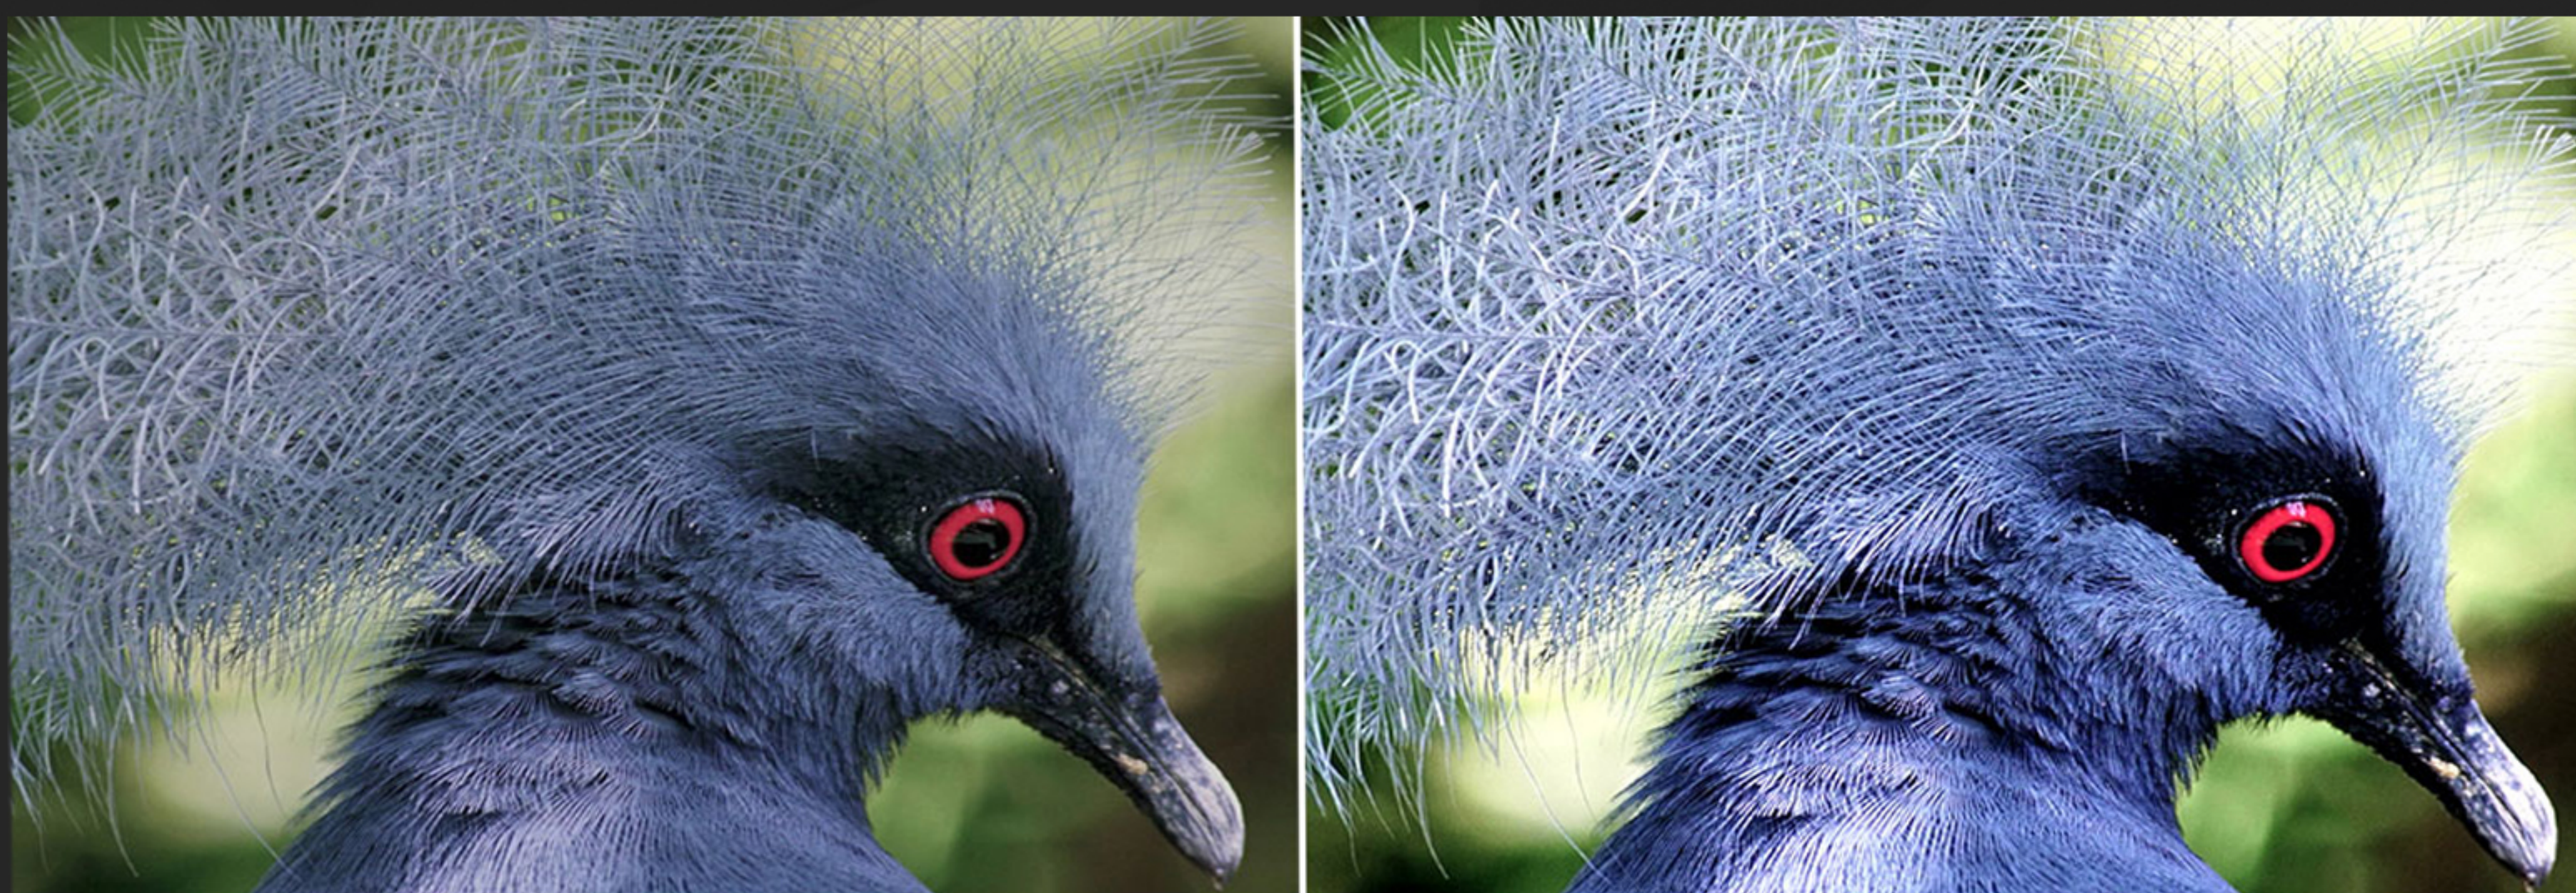

Low Refresh Rate

High Refresh Rate



Low Grayscale



High Grayscale



Enbon



enbon.com



Enbon Led Display

Application **S**cenarios



Metro



Cinema



KTV



VIP Room



Specification

Pixel Pitch	1.25	1.538	1.667	1.86	2.5	3
LED Lamp	SMD 1010	SMD 1212	SMD 1212/ 1515	SMD 1515	SMD2020	SMD2020
Density (dots/m²)	640000	422500	360000	288906	160000	111111
Scan	64 scan	52 scan	48 scan	43 scan	32 scan	26 scan
Brightness	≤500 nits	≤600 nits	≤600 nits	≤600 nits	≤750 nits	≤650 nits
IP Rating	IP45					
Cabinet Materiel	Die-casting Aluminum					
Refresh Rate(Hz)	3840					
Cabinet Weight	7.5 kg					
Module Size (mm)	320*160					
Cabinet Size (mm)	640*480*62					
Module Pixel	256*128 dots	208*104 dots	192*96 dots	172*86 dots	128*64 dots	104*52 dots
Cabinet Pixel	512*384 dots	416*312 dots	384*288 dots	344*258 dots	256*192 dots	208*156 dots
Max Power	550 w/sqm					
Average Power	185 w/sqm					
Receiving Card	Novastar MRV412					
Maintenance Method	Front Maintenance					
Connection	Soft Connection/Hard Link					
Viewing Angle	H140 (+70/-70) deg V140 (+70/-70) deg					
Control Way	Synchronous / Asynchronous					
Gray Scale	13-16 bit					
Operating System	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI					
Work Humidity	10% ~ 90%					
Work Temperature	-20 ~ +65℃					

Shenzhen Enbon Optoelectronic CO.,LTD

8th Floor, Building 1, Jiuzhou Industrial Park, No. 10, No. 19 Tongguan Road,
Tianliao Community, Yutang Street, Guangming District, Shenzhen



Enbon



enbon.com



Enbon Led Display