




ENBON GROUP
Spirit & Success, **Together**

FS Model

Small Pitch Cabinet Full Front Service

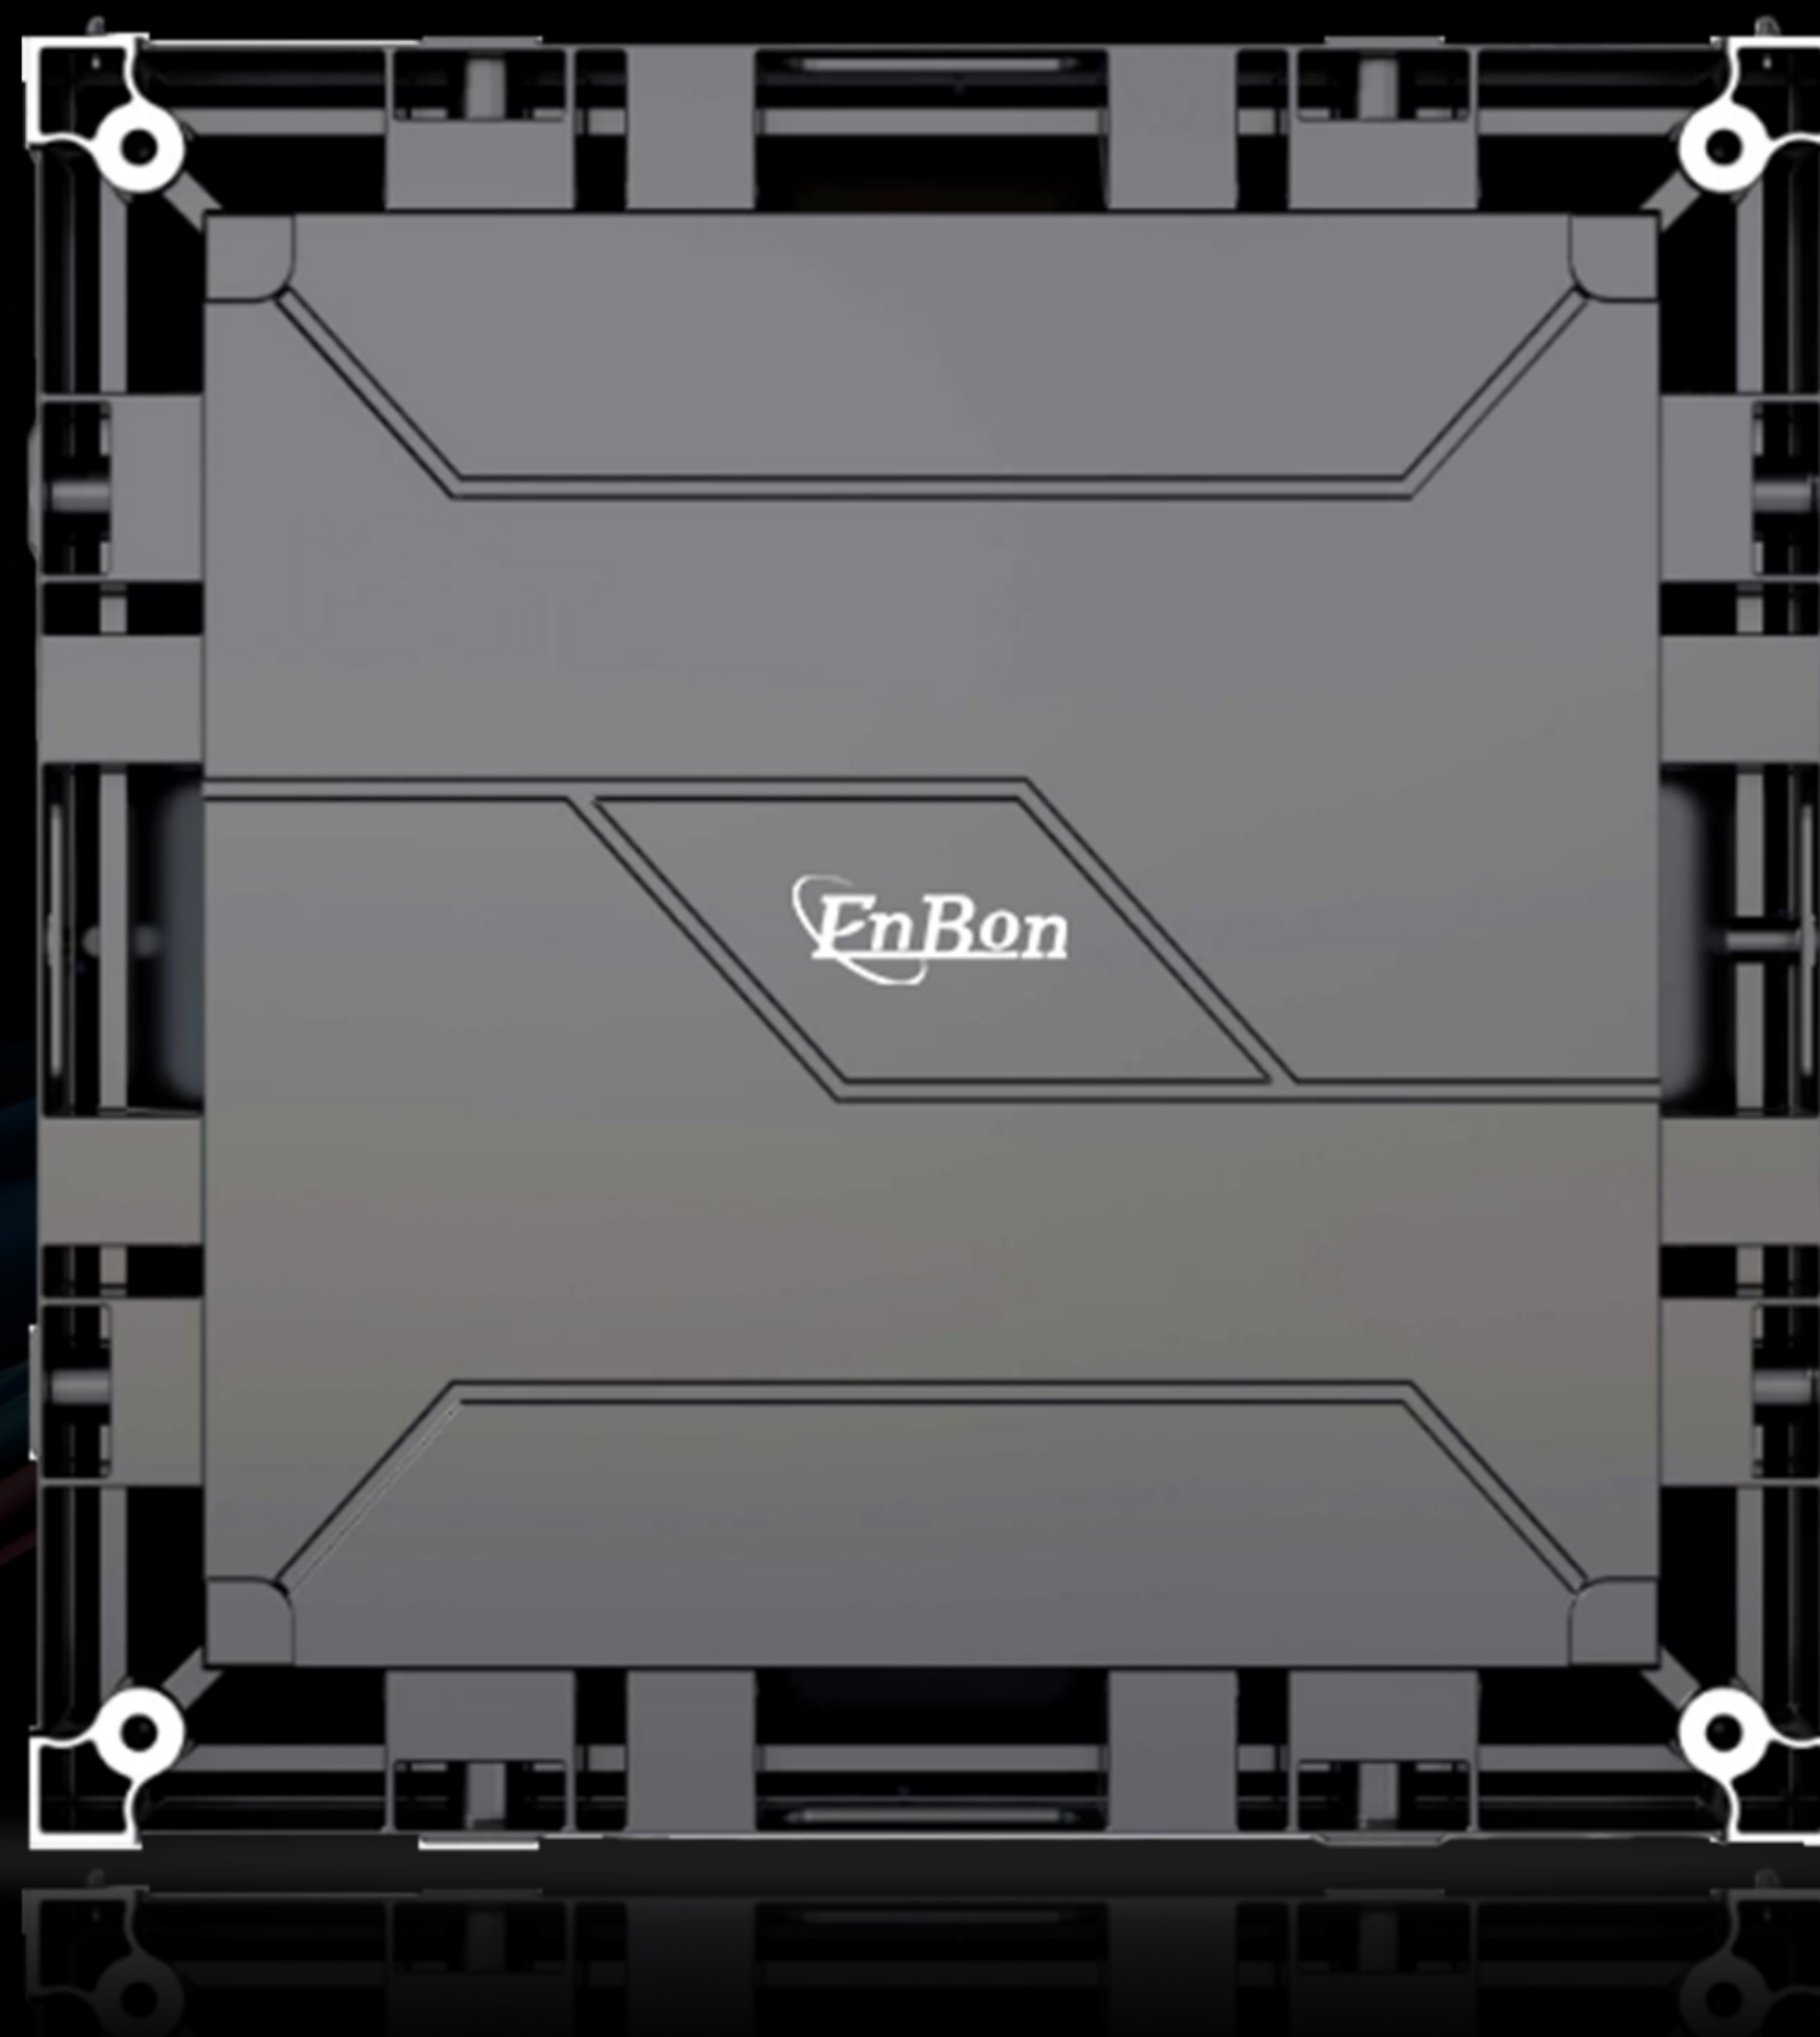

Enbon



enbon.com



Enbon Led Display




ENBON GROUP
Spirit & Success, **Together**

Lighter **Weight** Easier Operation


20% lighter than normal products

Making it more convenient to operate and move

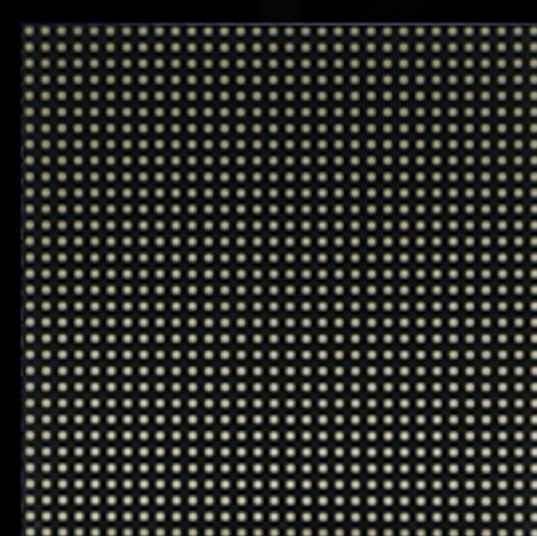


L*H: 240*240(mm)

Module

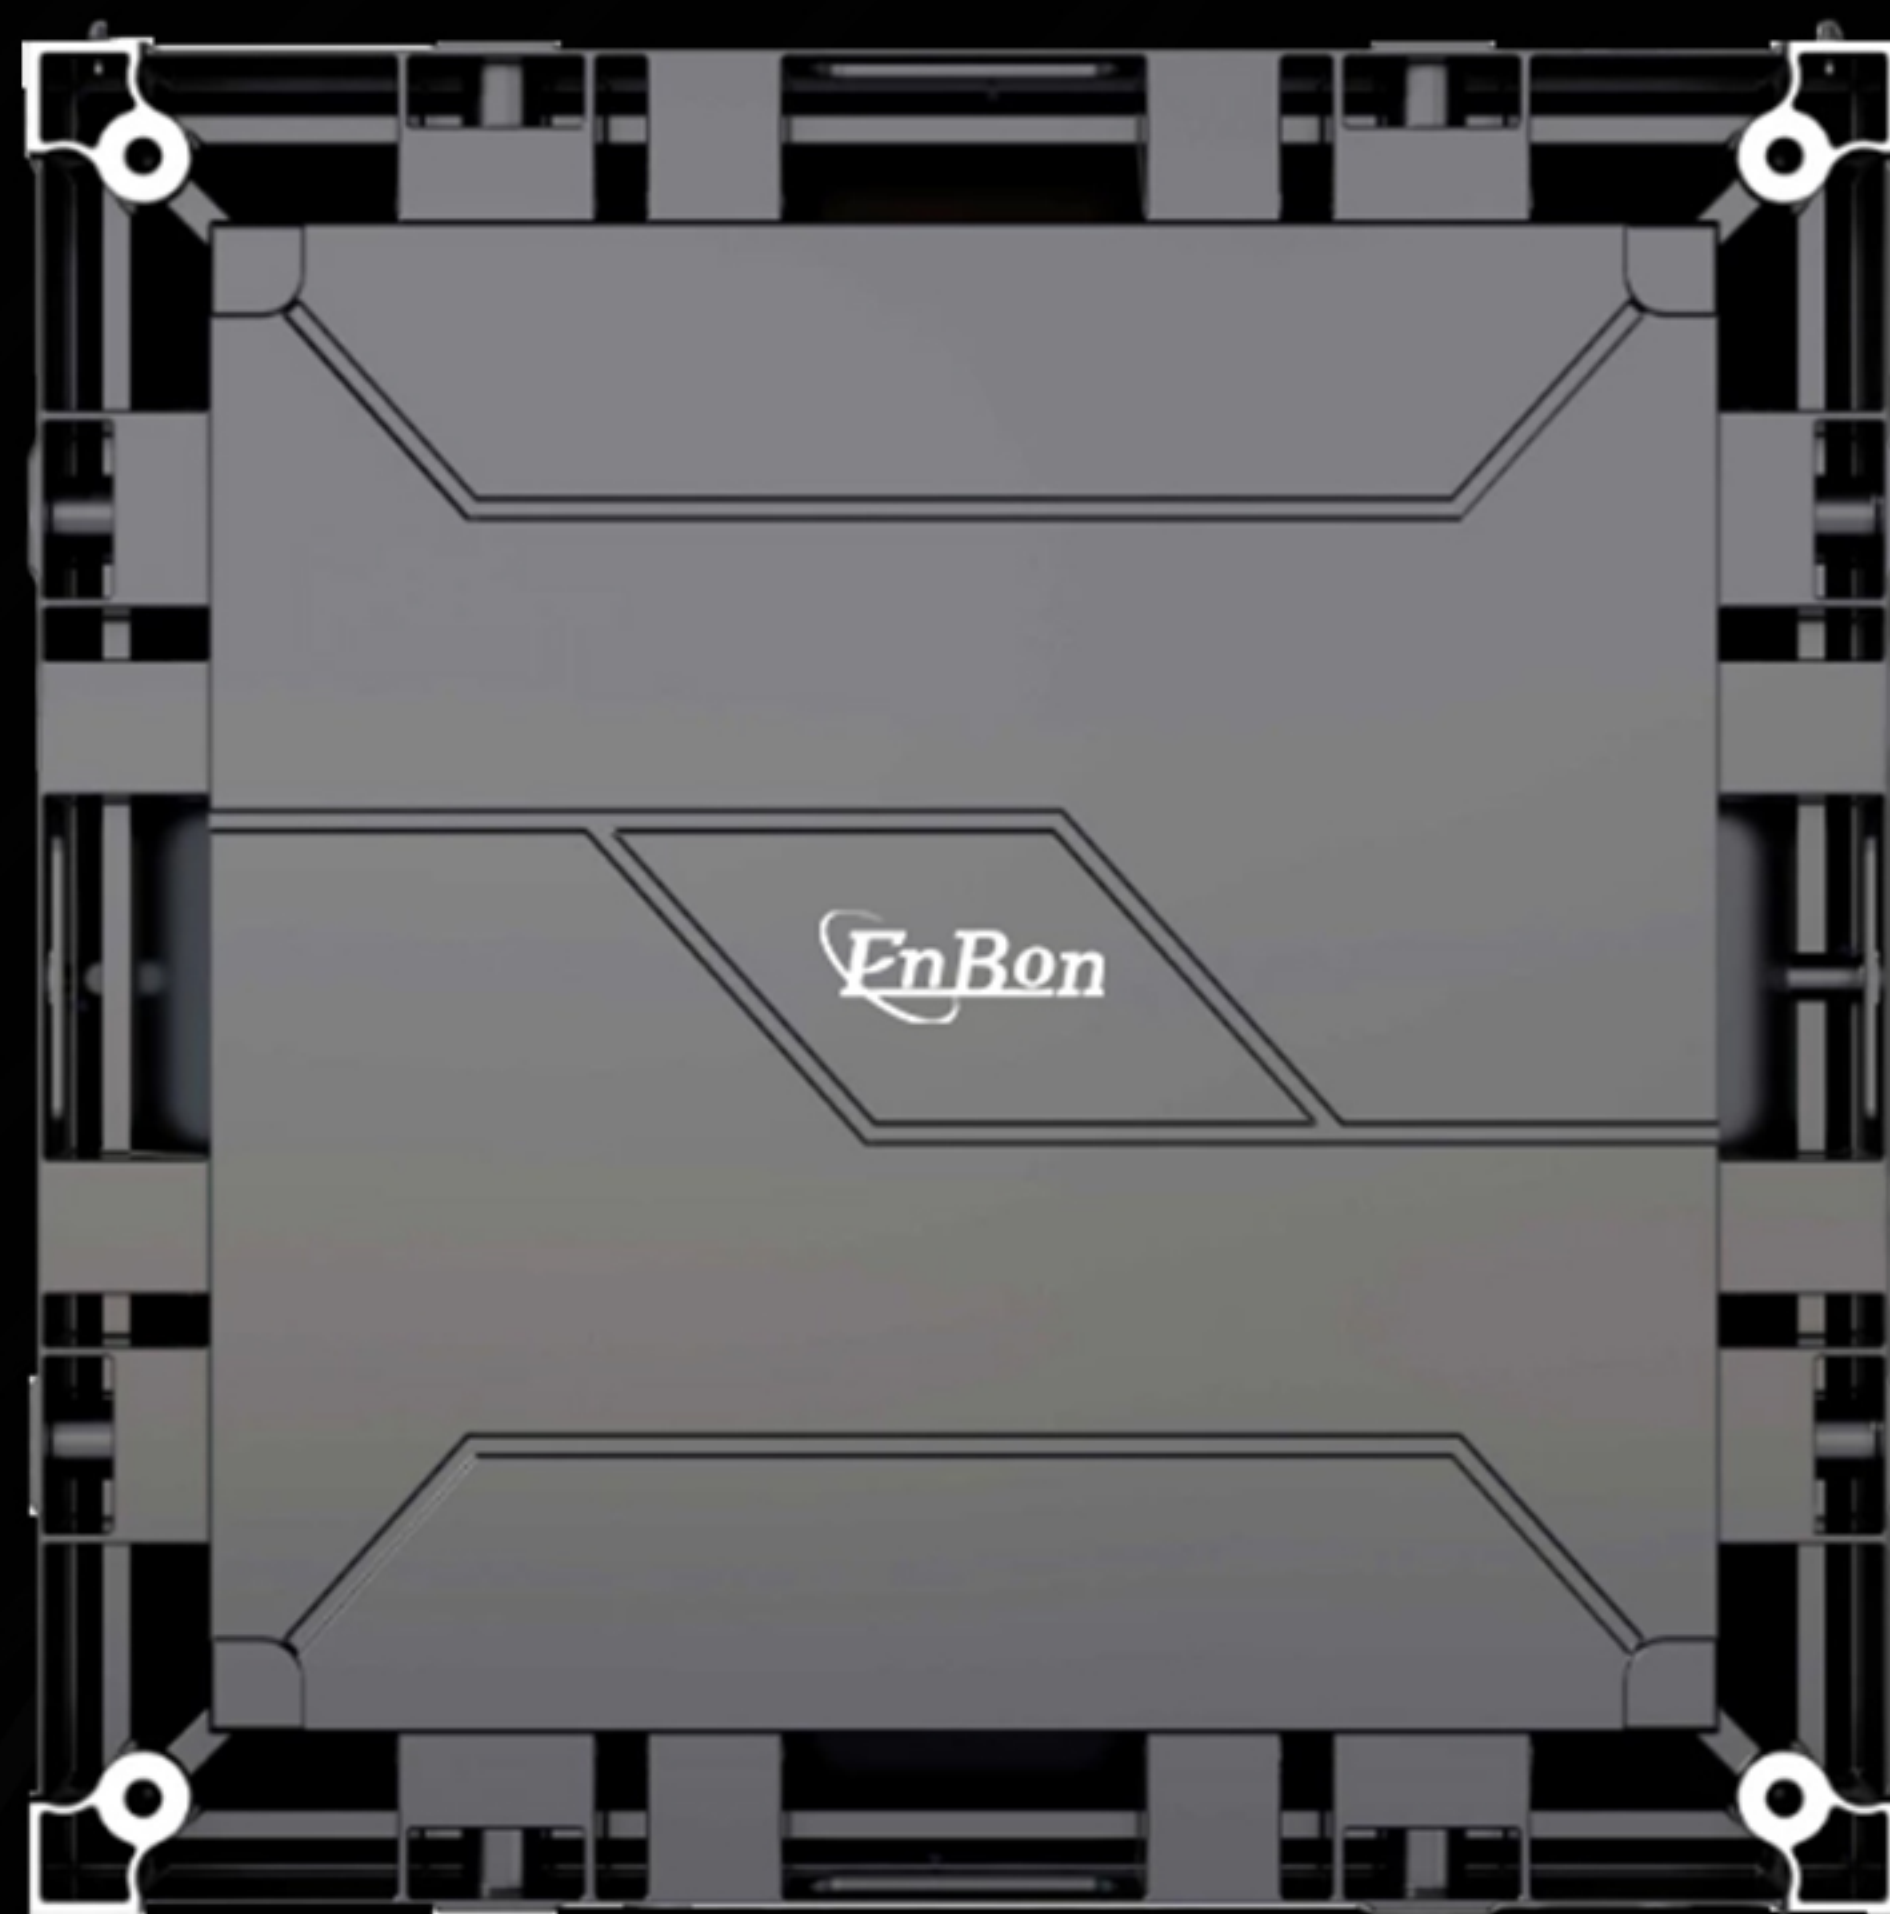

L*H: 480*480(mm)

Cabinet

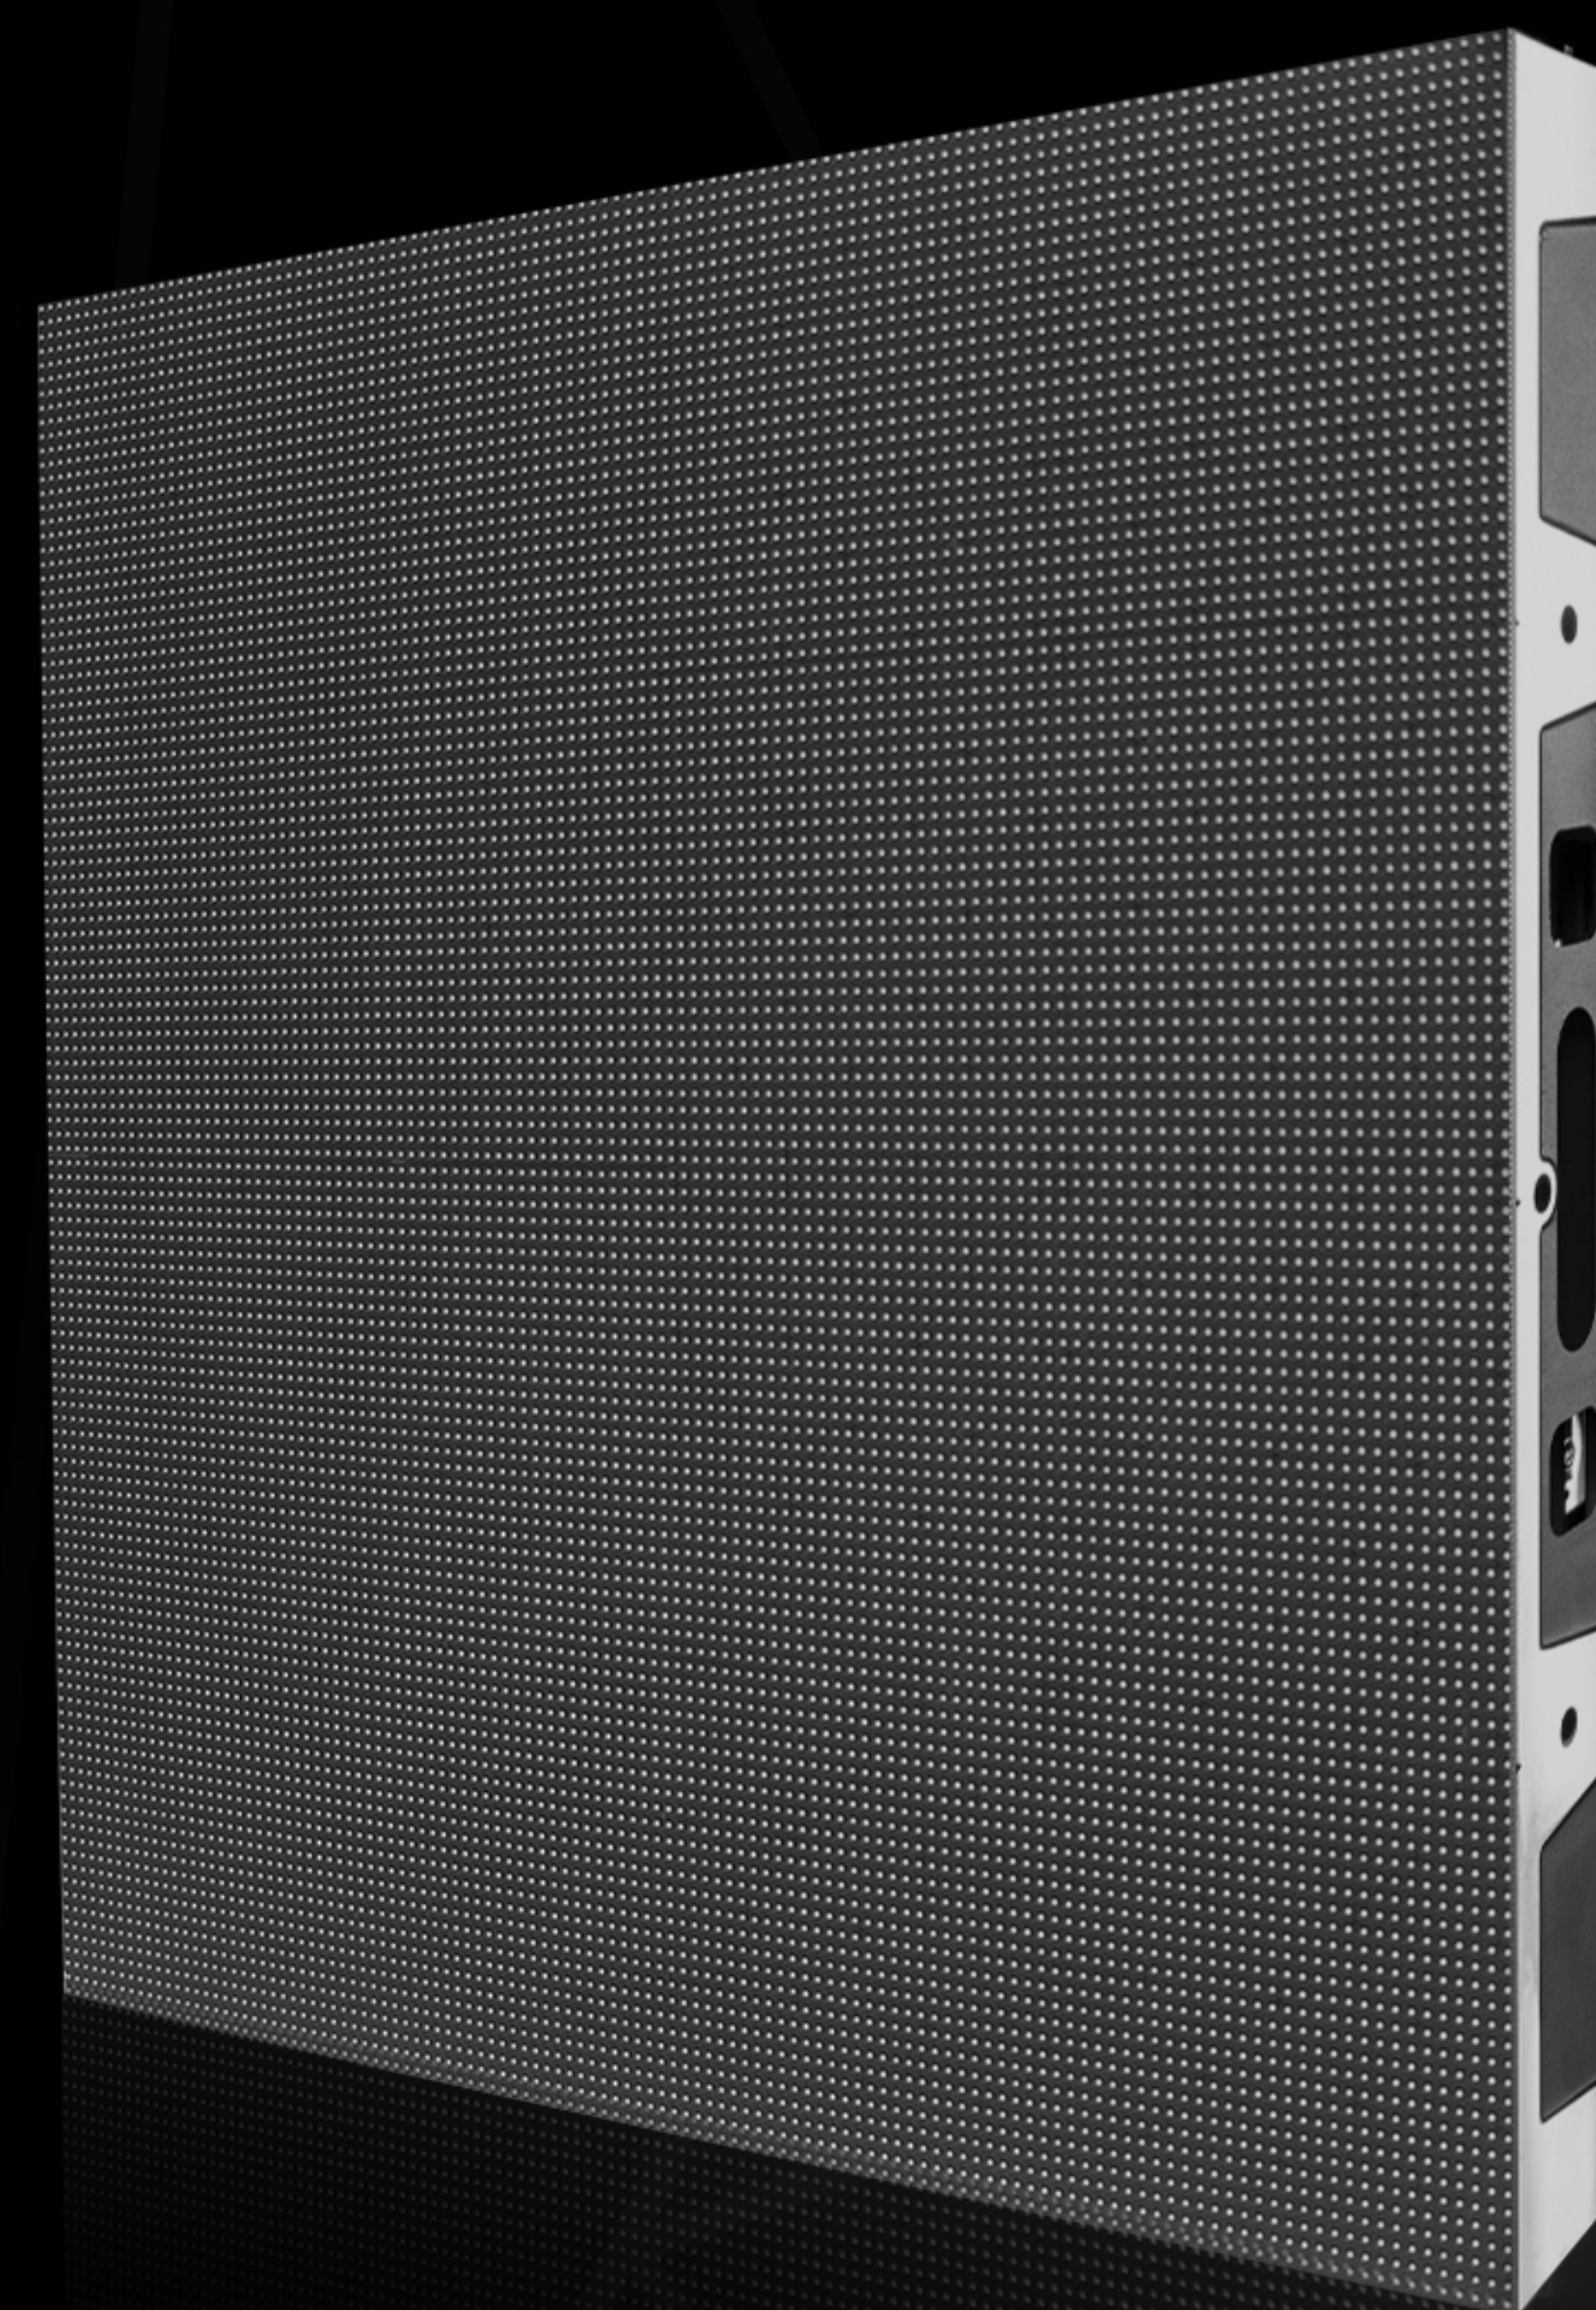

Weight 5.5kg



Enbon



enbon.com



Enbon Led Display



ENBON GROUP
Spirit & Success, **Together**

Thinner Panels Lower Cost

10 in 1 flight case saves more space
and transportation cost



24 panels can be placed horizontally
in a regular 20-foot or 40-foot truck



Enbon




enbon.com



Enbon Led Display


Product Details

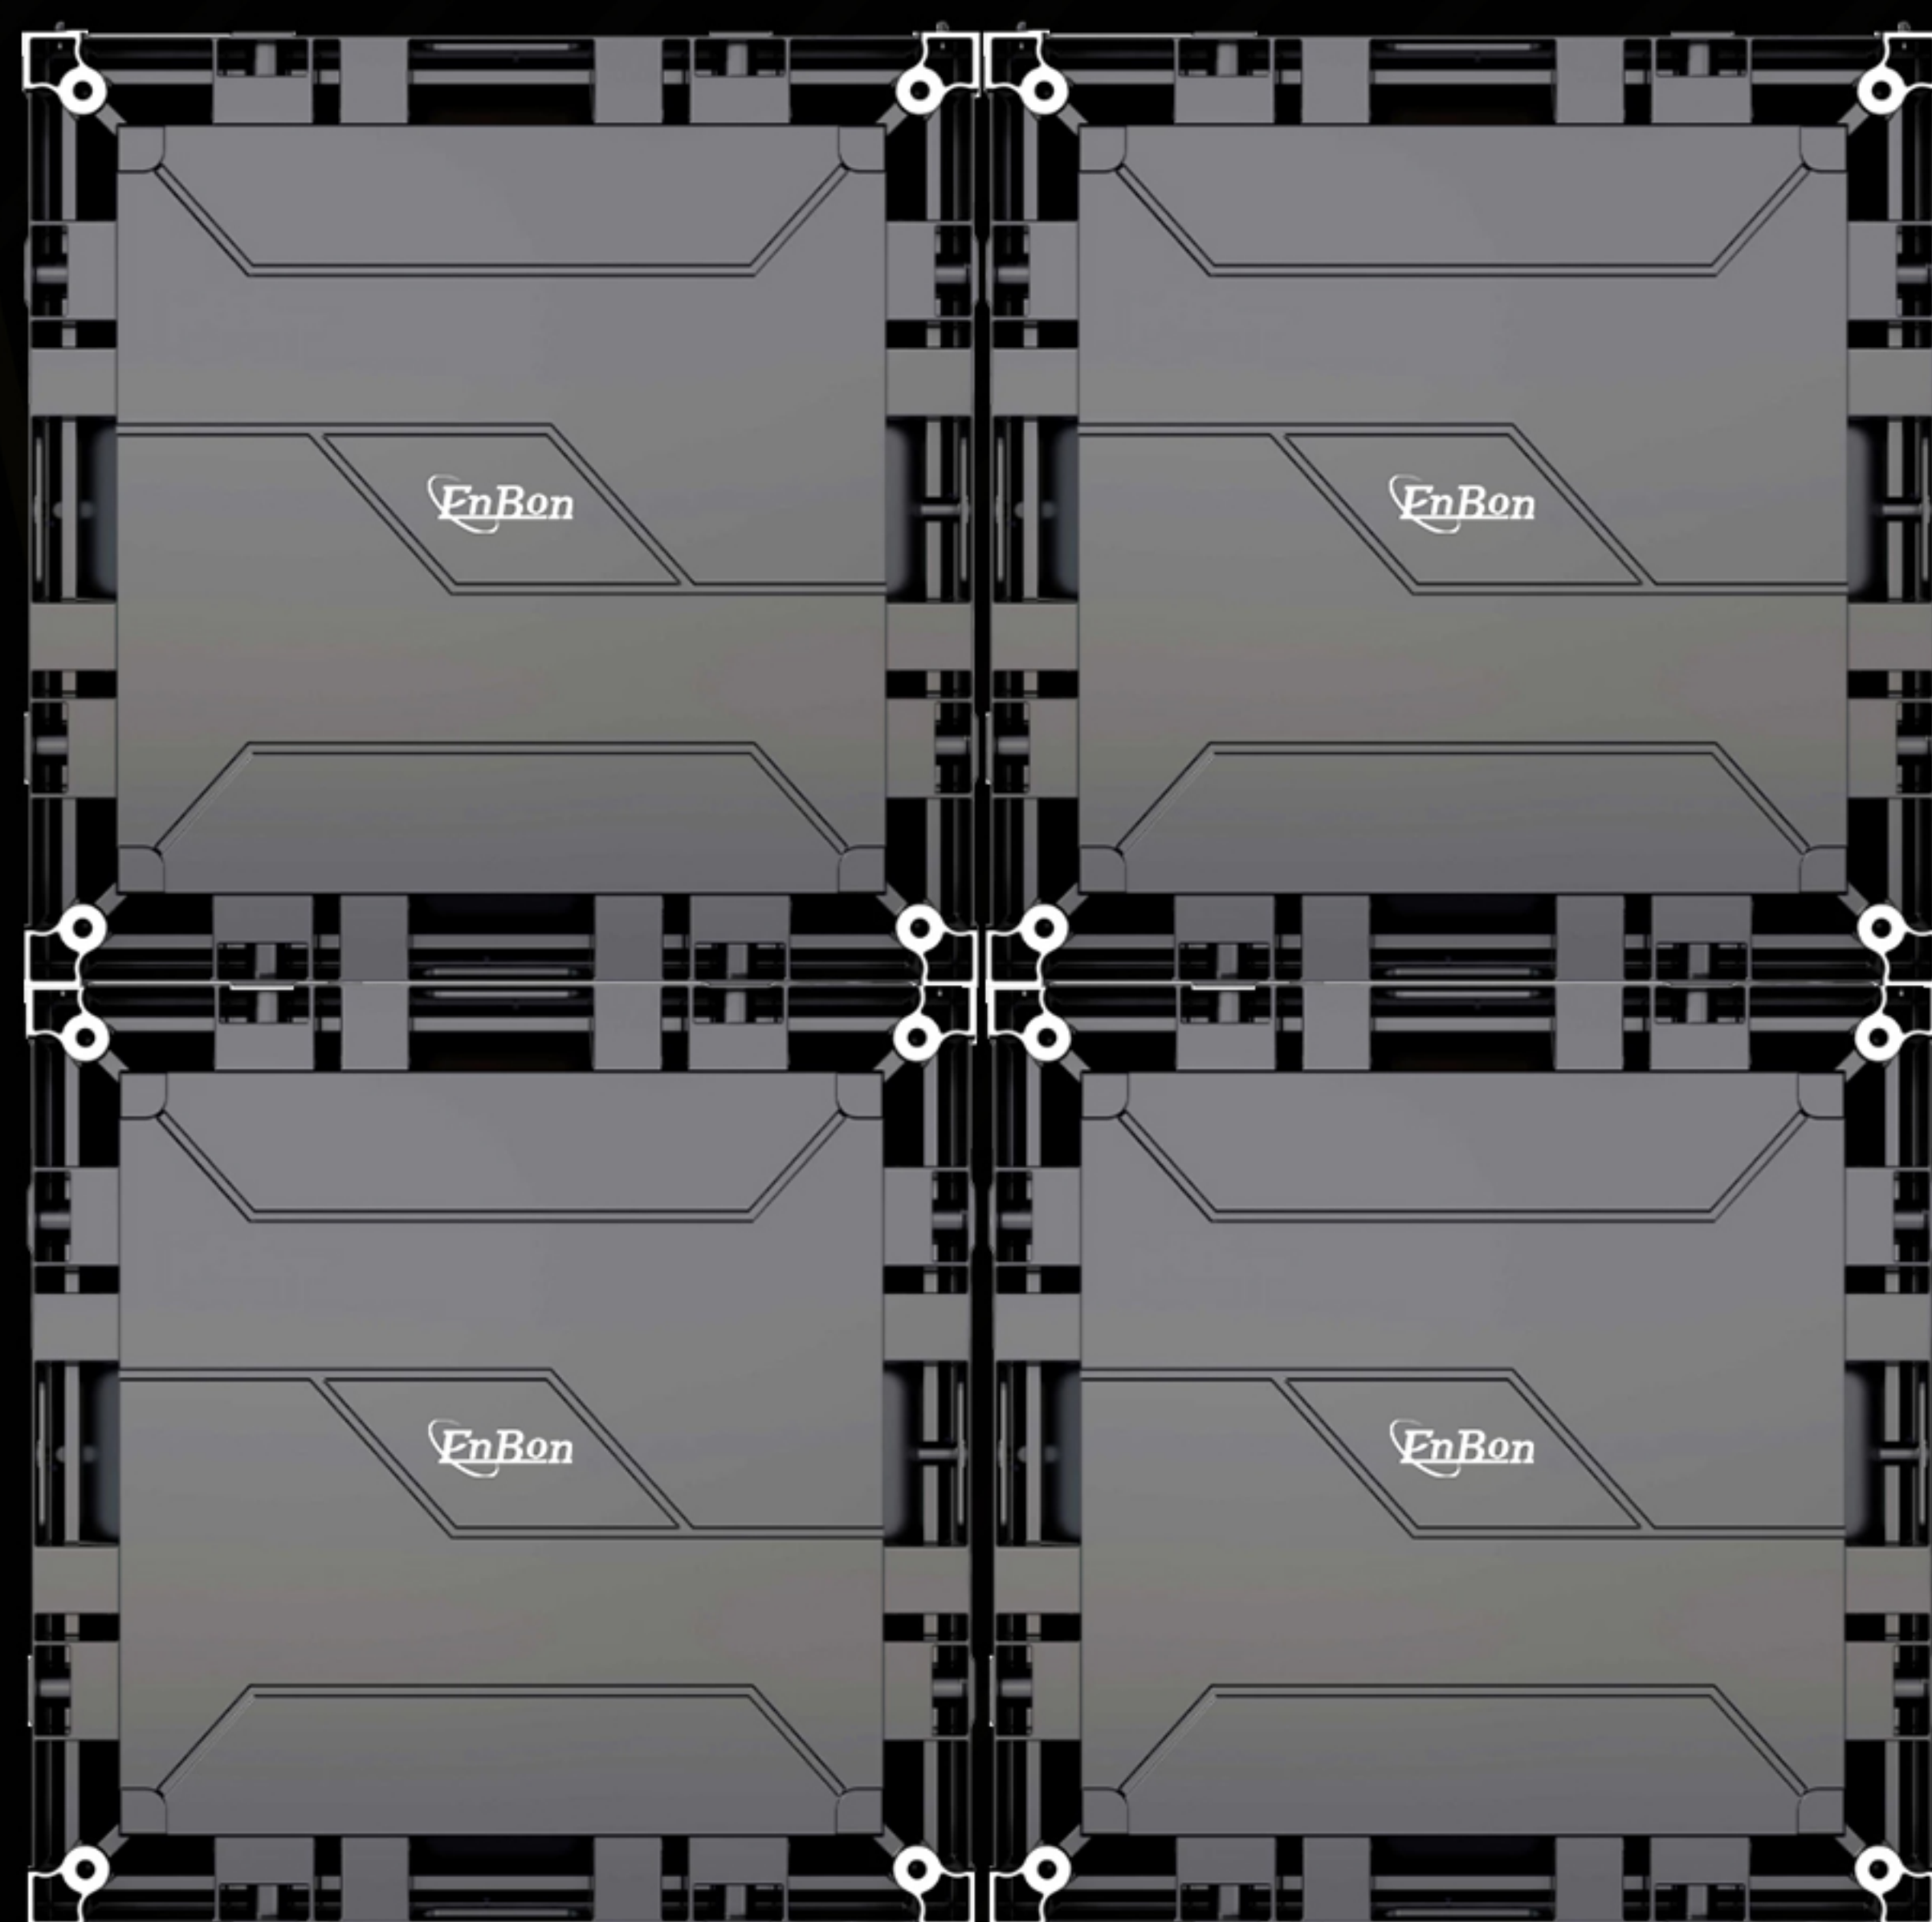


Can Do Seamless Splicing




Handles

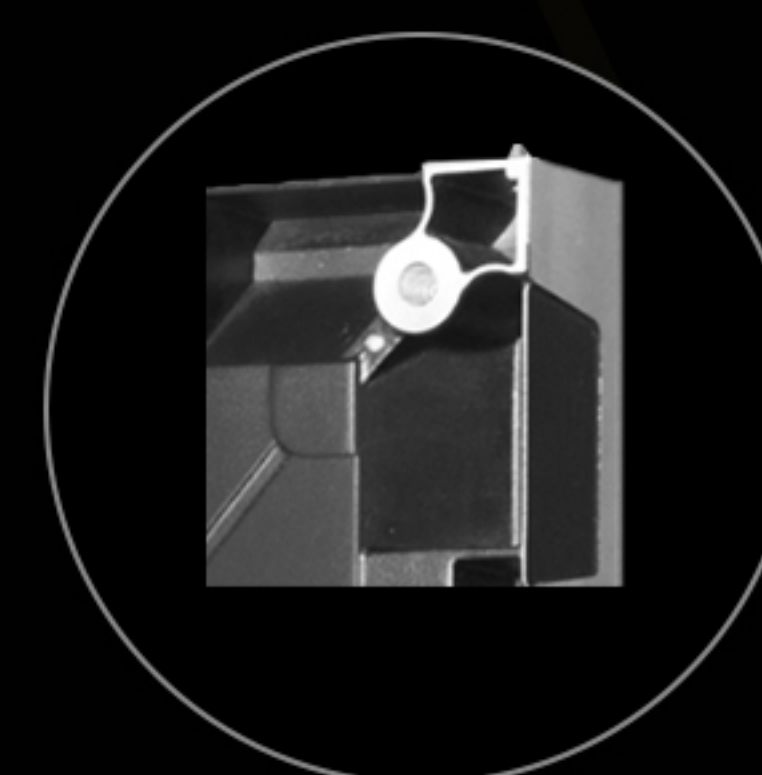

Corner Cover

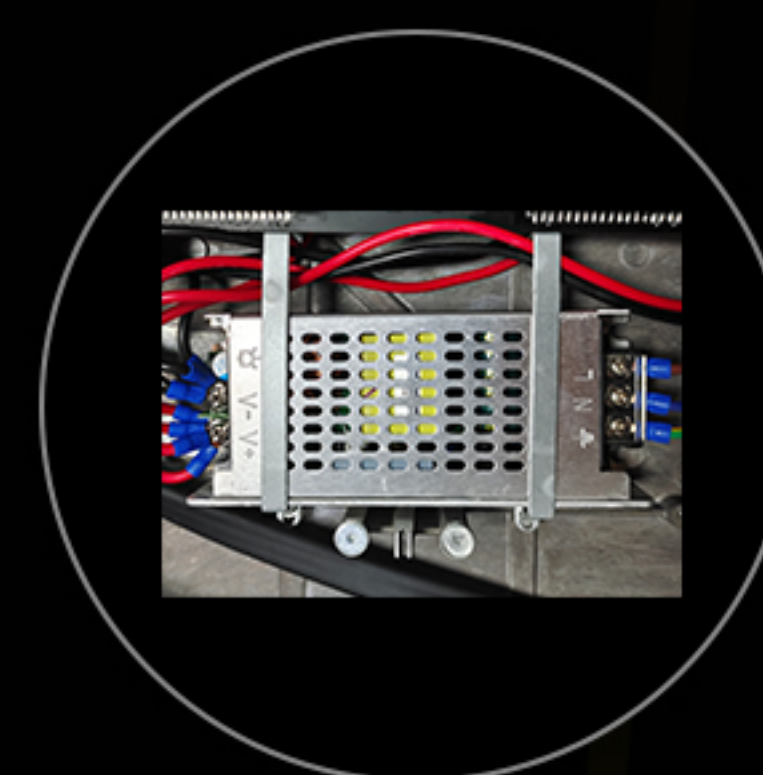


Power Box

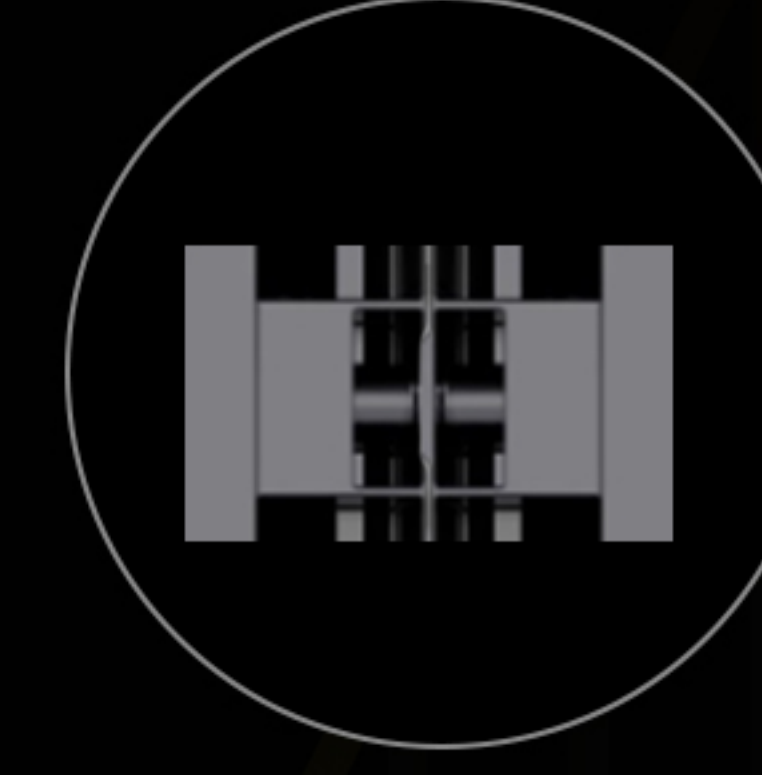

Fast Lock
Between Left and
Right Cabinets

Module Connection Port

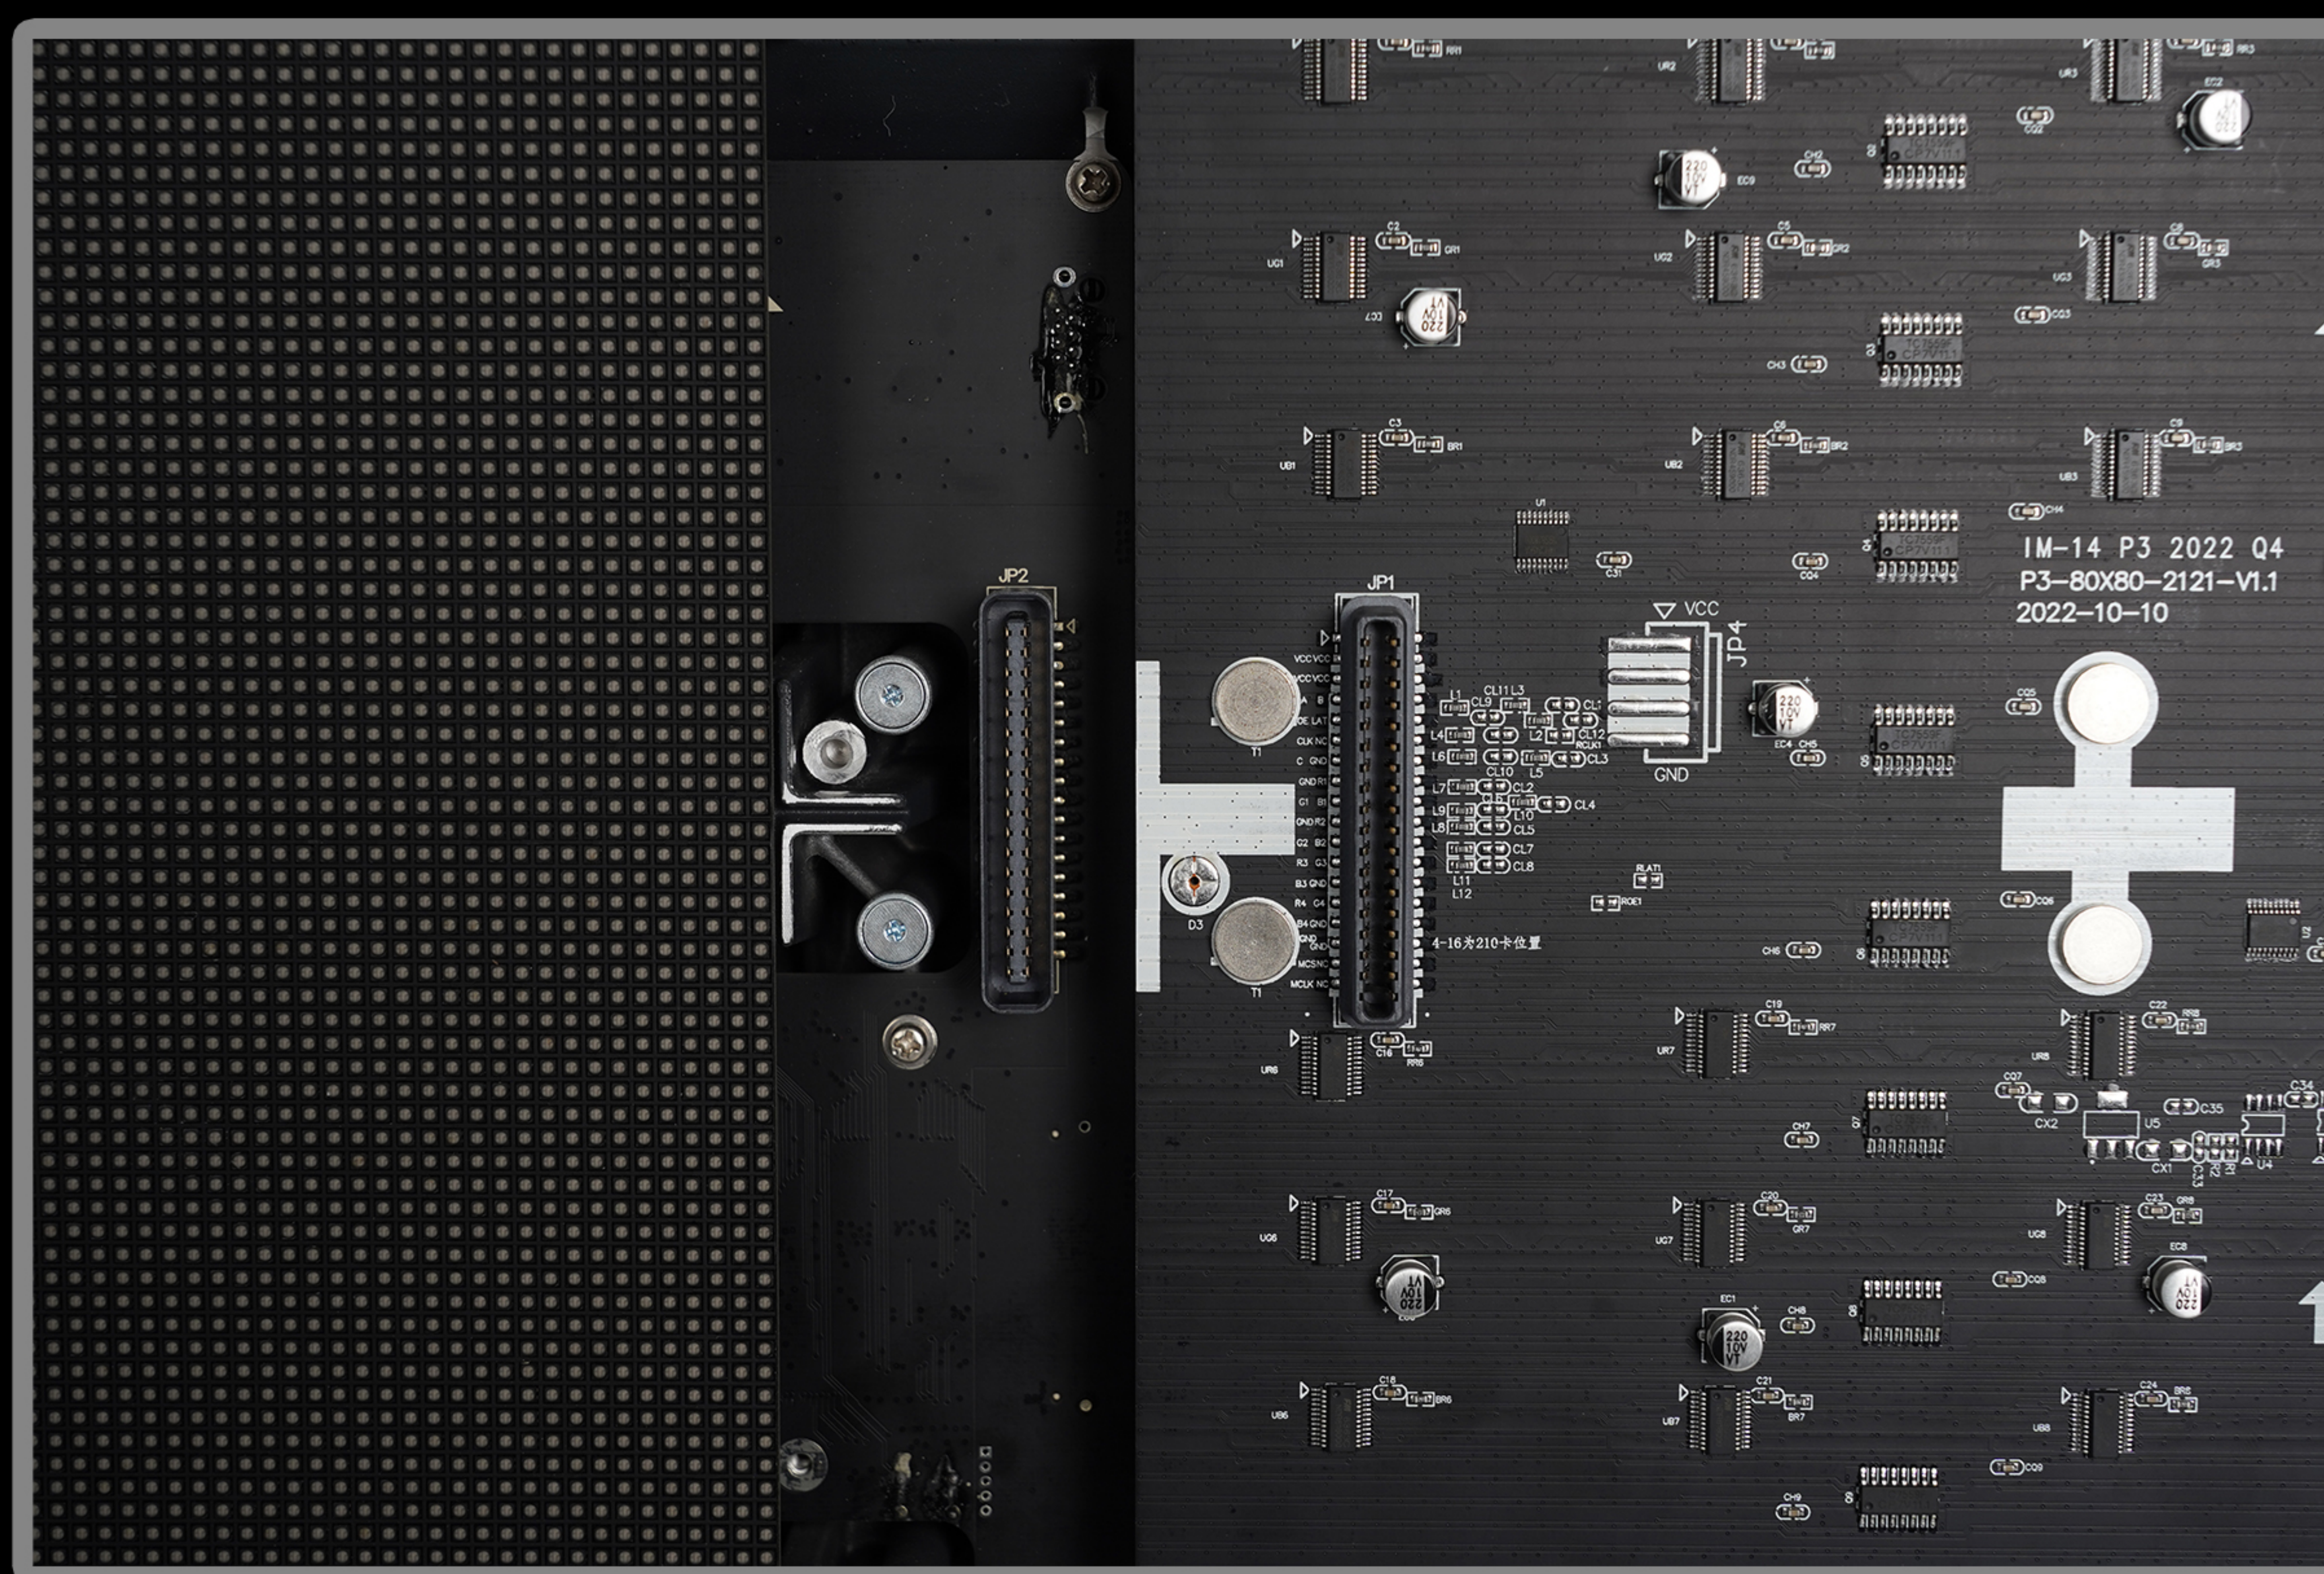




ENBON GROUP
Spirit & Success, **Together**

Top Positioning Column

Stable protective box body

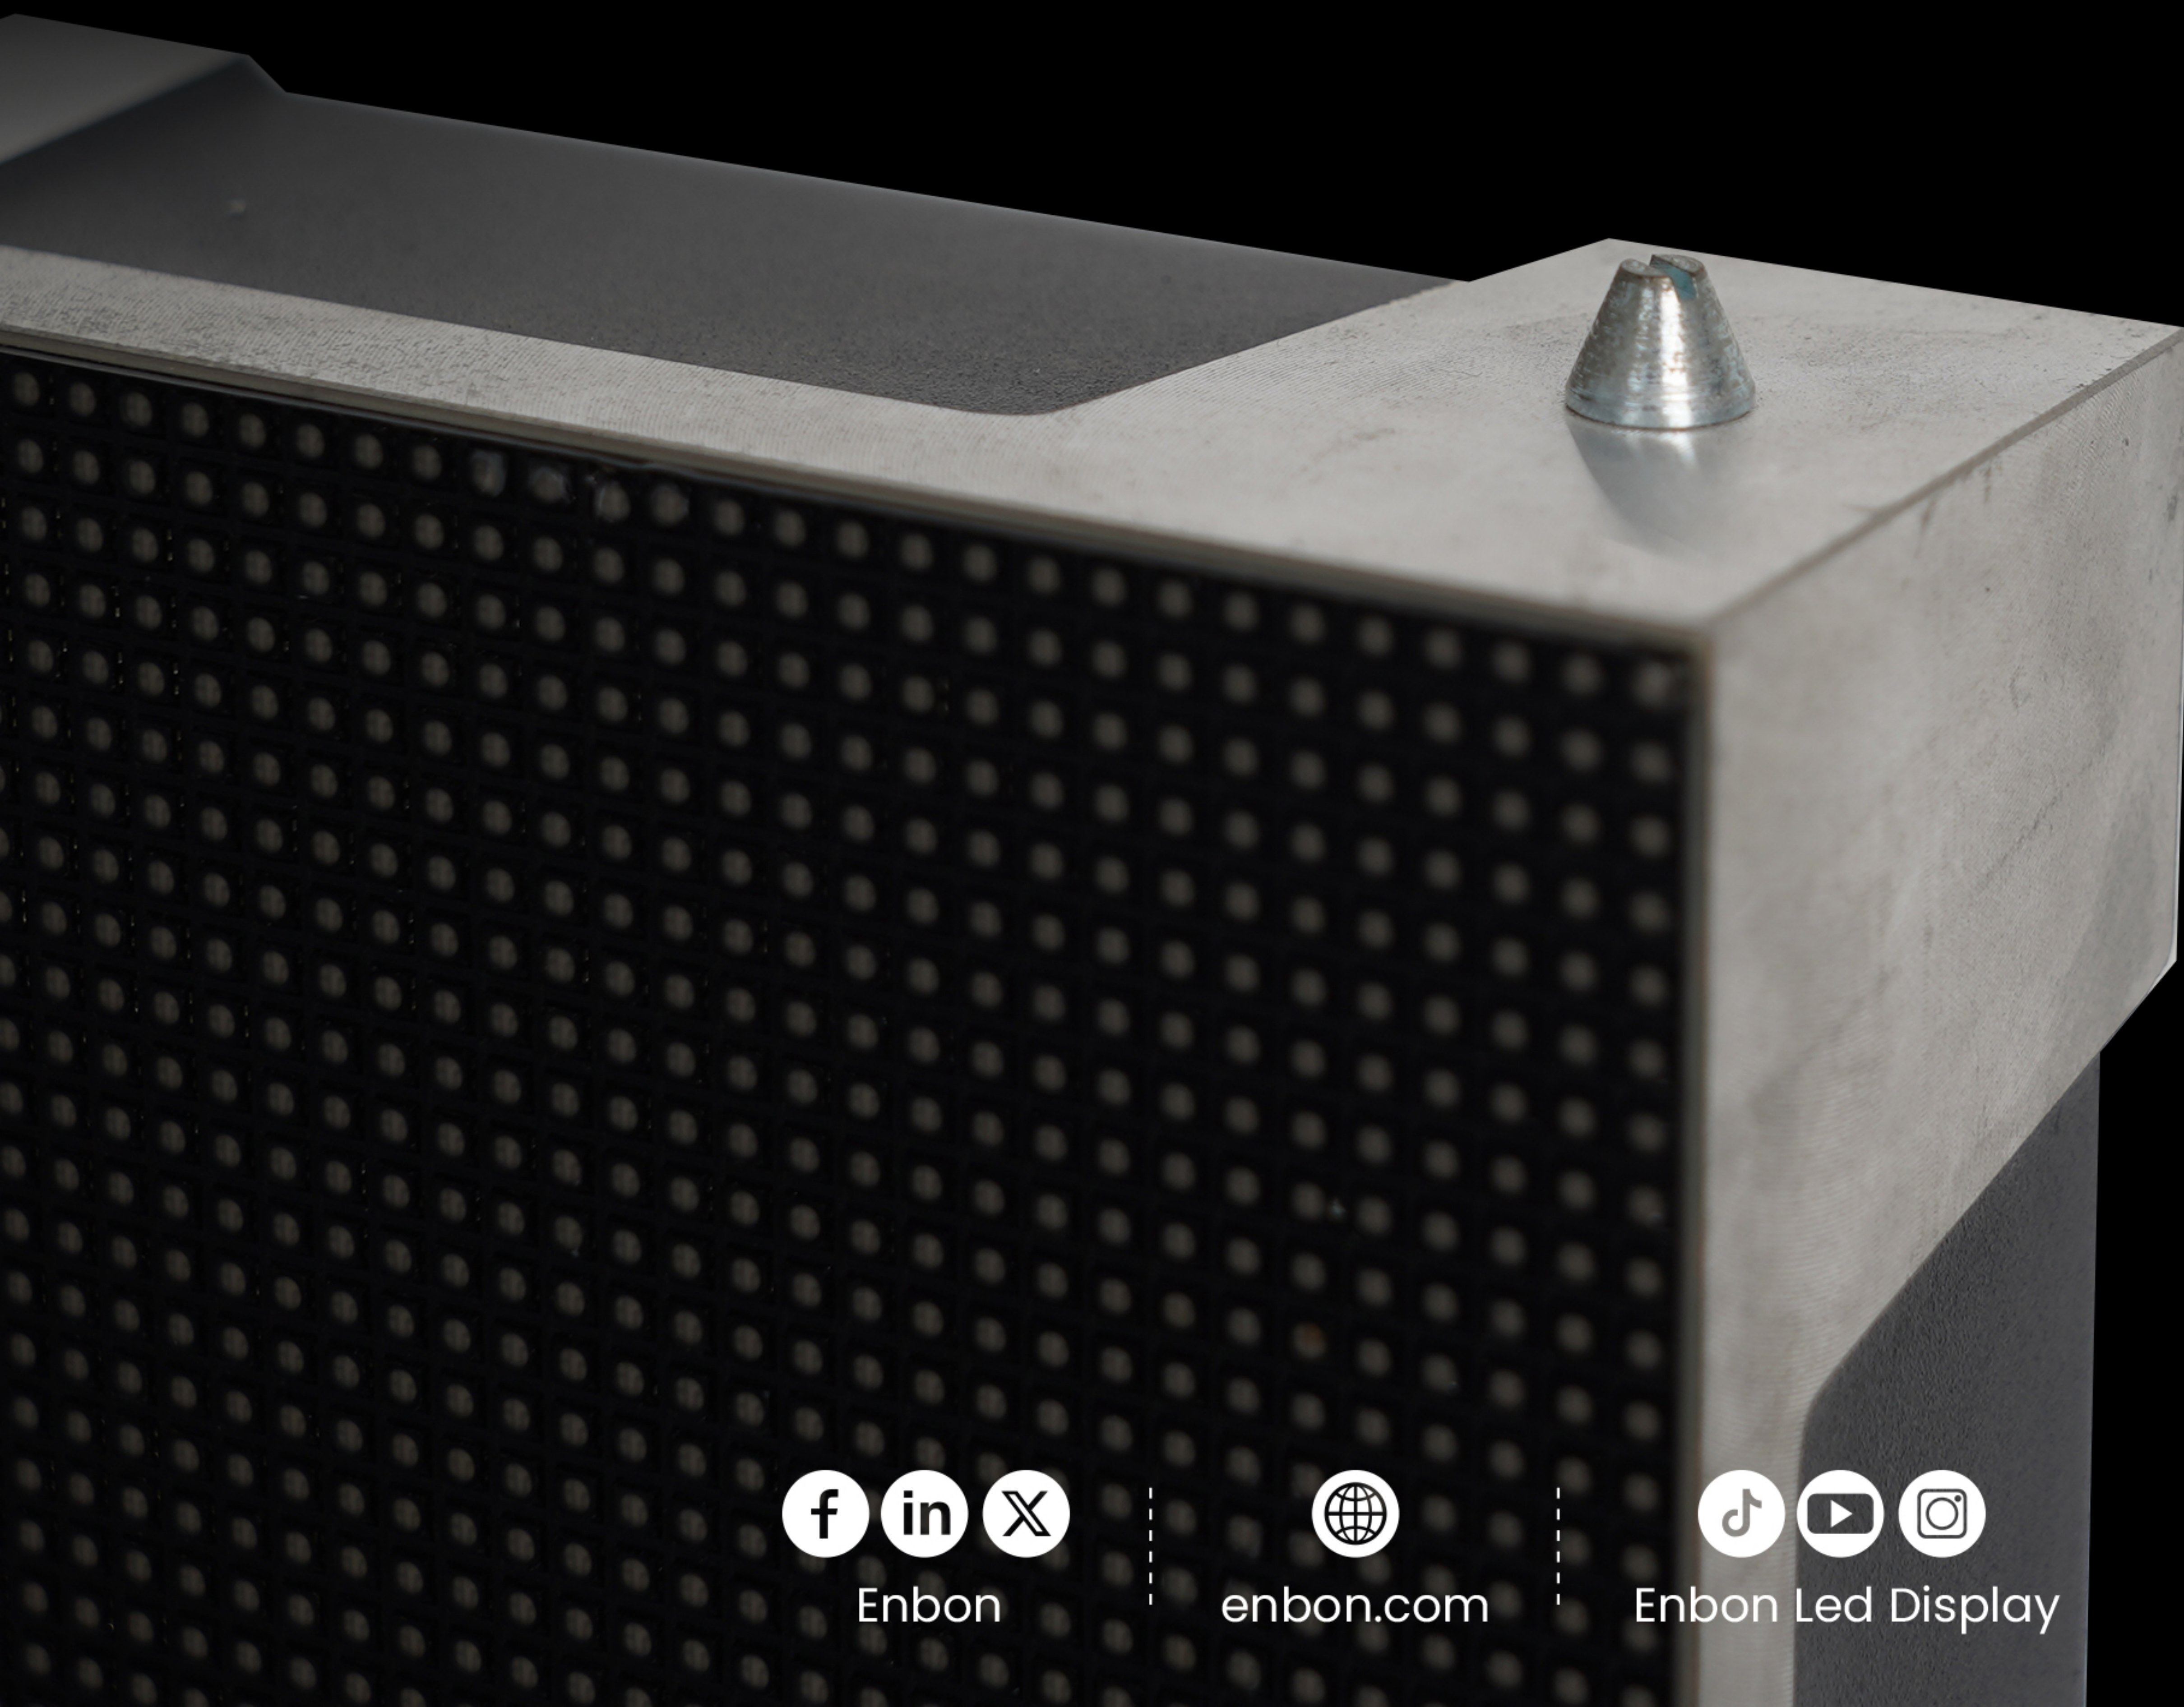

Enbon



enbon.com



Enbon Led Display



ENBON GROUP
Spirit & Success, **Together**

Corner Protector Lock



Enbon



enbon.com



Enbon Led Display



ENBON GROUP
Spirit & Success, **Together**



DIE-CASTING ALUMINUM MATERIAL

Excellent
Waterproofing
Performance



Enbon



enbon.com



Enbon Led Display



ENBON GROUP
Spirit & Success, **Together**

SIDE HANDLE



Enbon




enbon.com



Enbon Led Display

High Refresh Rate

High Grayscale

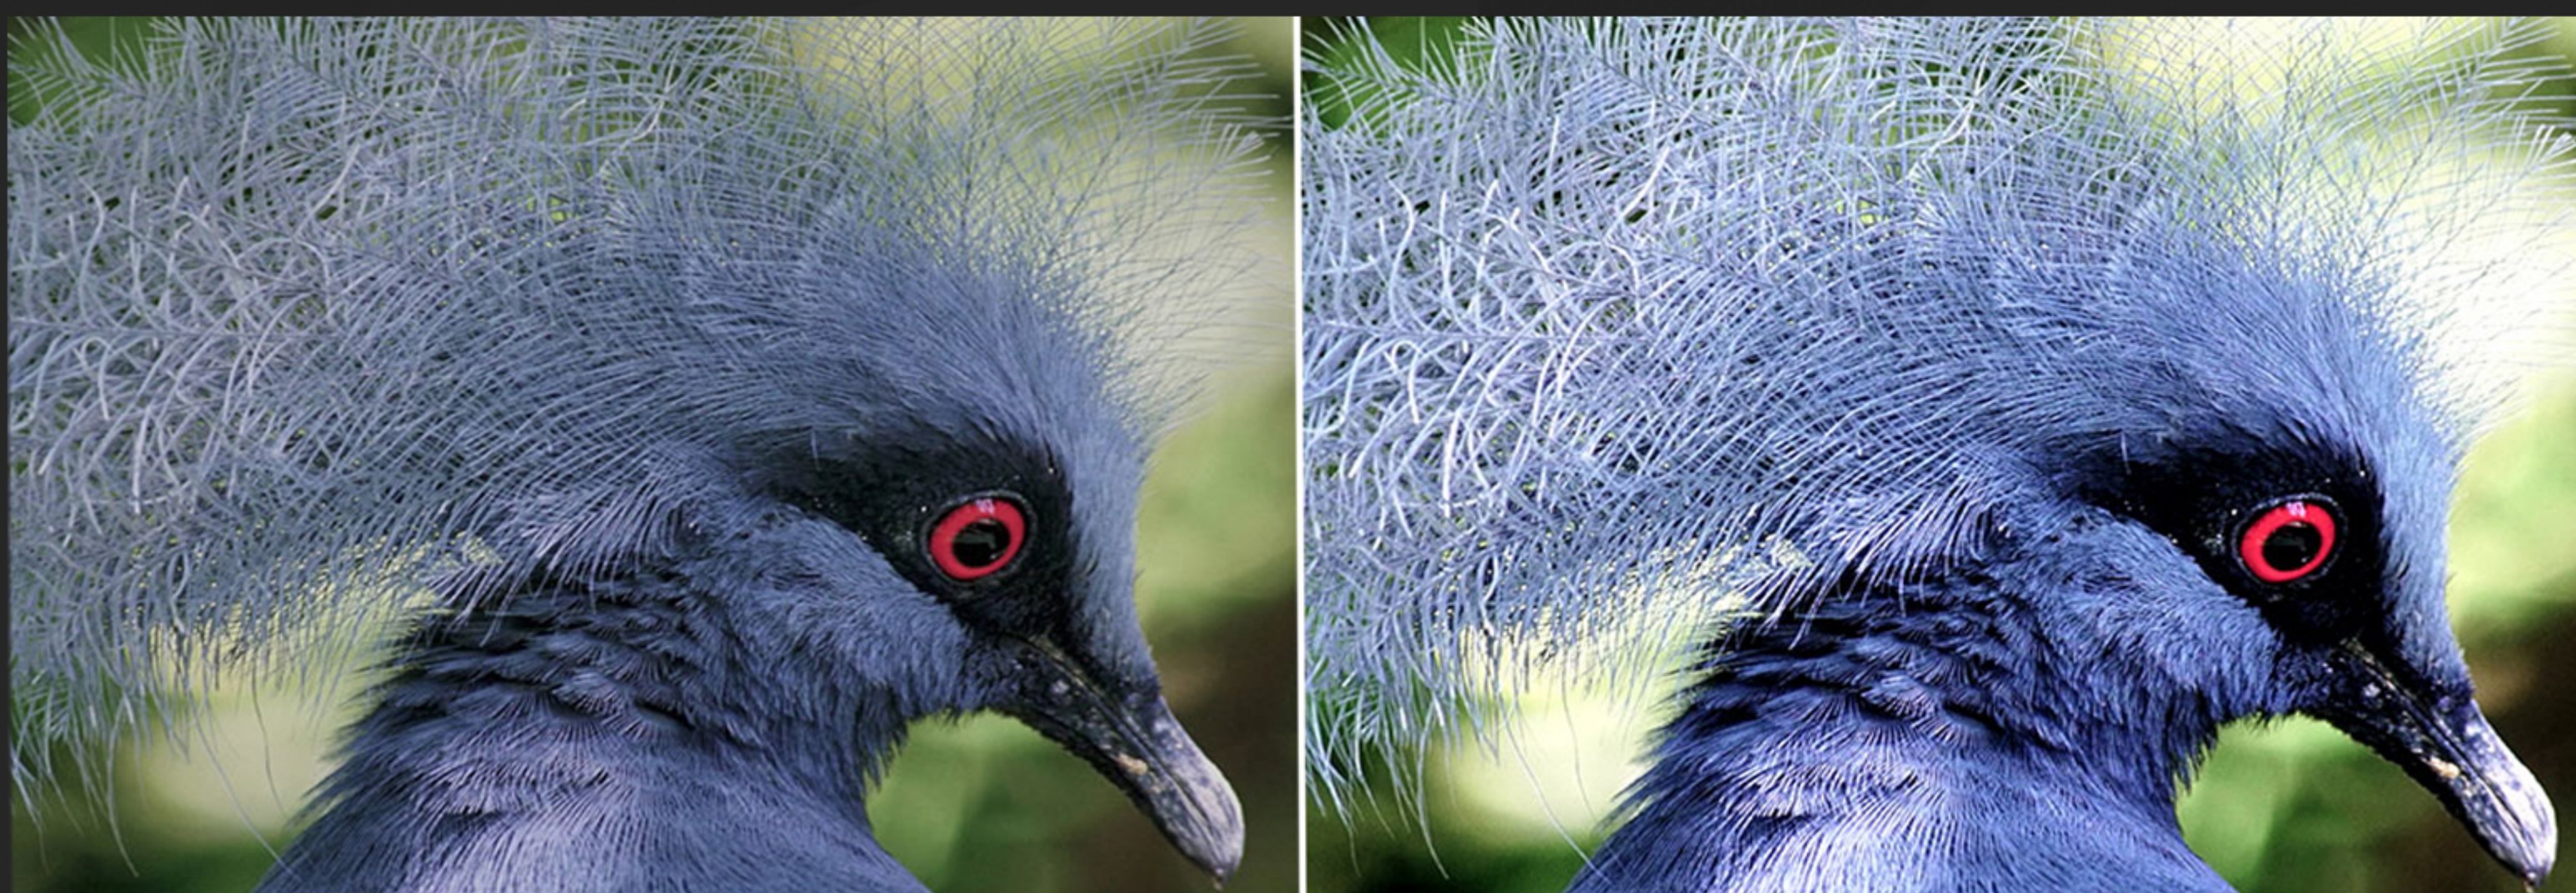

Low Refresh Rate

High Refresh Rate



Low Grayscale



High Grayscale



Enbon



enbon.com



Enbon Led Display

Application **S**cenarios



Metro



Cinema



KTV



VIP Room



Specification

Pixel Pitch	1.579	1.875	2.5	3
LED Lamp	SMD1212	SMD1515	SMD2020	SMD2020
Density (dots/m²)	401111	284444	160000	111111
Scan	38 scan	64 scan	32 scan	40 scan
Brightness	≤600 nits	≤600 nits	≥700 nits	≥600 nits
IP Rating	Front IP45/Rear IP30			
Cabinet Materiel	Die-casting Aluminum			
Refresh Rate(Hz)	3840 / 7680			
Cabinet Weight	5.5 kg			
Module Size (mm)	240*120			
Cabinet Size (mm)	480*480*62			
Module Pixel	152*76 dots	128*128 dots	96*96 dots	80*80 dots
Cabinet Pixel	304*304 dots	256*256 dots	192*192 dots	160*160 dots
Max Power	550 w/sqm			
Average Power	185 w/sqm			
Receiving Card	Novastar A5S Plus/Novatar A10S Pro			
Maintenance Method	Full Front Maintenance			
Connection	Hardlink			
Viewing Angle	H140 (+70/-70) deg V140 (+70/-70) deg			
Control Way	Synchronous / Asynchronous			
Gray Scale	13-16 bit			
Operating System	AV, S-Video, VGA, DVI, YPbPr, HDMI, SDI			
Work Humidity	10% ~ 90%			
Work Temperature	-20 ~ +65°C			

Shenzhen Enbon Optoelectronic CO.,LTD

8th Floor, Building 1, Jiuzhou Industrial Park, No. 10, No. 19 Tongguan Road,
Tianliao Community, Yutang Street, Guangming District, Shenzhen



Enbon



enbon.com



Enbon Led Display